



Dr.WEB

Industrial for Linux

User Manual



© Doctor Web, 2026. All rights reserved

This document is intended for information and reference purposes regarding the Dr.Web software discussed herein. This document is not a basis for exhaustive conclusions about the presence or absence of any functional and/or technical features in Dr.Web software and cannot be used to determine whether Dr.Web software meets any requirements, technical specifications and/or parameters, and other third-party documents.

This document is the property of Doctor Web and may be used solely for the personal purposes of the purchaser of the product. No part of this document may be reproduced, published or transmitted in any form or by any means, without proper attribution, for any purpose other than the purchaser's personal use.

Trademarks

Dr.Web, SpIDer Mail, SpIDer Guard, CureIt!, CureNet!, AV-Desk, KATANA and the Dr.WEB logo are trademarks and registered trademarks of Doctor Web in Russia and/or other countries. Other trademarks, registered trademarks and company names used in this document are the property of their respective owners.

Disclaimer

In no event shall Doctor Web and its resellers or distributors be liable for any errors or omissions, or for any loss of profit or any other damage caused or alleged to be caused directly or indirectly by this document, or by the use of or inability to use the information contained in this document.

Dr.Web Industrial for Linux
Version 11.1
User Manual
7/22/2026

For information on regional and international offices of Doctor Web, please visit the [official website](#) .

Doctor Web

Doctor Web develops and distributes Dr.Web information security solutions that provide effective protection against malicious software and spam.

Doctor Web customers include home users around the world, government agencies, small businesses, and nationwide corporations.

Since 1992, Dr.Web anti-virus solutions have been known for their continuous excellence in malware detection and compliance with international information security standards.

The state certificates and awards received by Dr.Web solutions, as well as the worldwide use of our products, are the best evidence of exceptional trust in the company products.

We thank all our customers for their support and devotion to Dr.Web products!



Table of Contents

1. Introduction	8
2. Conventions and Abbreviations	9
3. About This Product	10
3.1. Basic Features of Dr.Web Industrial for Linux	11
3.2. Structure of Dr.Web Industrial for Linux	12
3.2.1. Basic Anti-Virus Components	12
3.2.2. Threat Search Components	14
3.2.3. Service Components	15
3.2.4. Interface Components	16
3.3. Putting in Quarantine	17
3.4. File Permissions	18
3.5. Operation Modes	19
4. System Requirements and Compatibility	23
5. Licensing	27
6. Installing and Uninstalling	28
6.1. Installing Dr.Web Industrial for Linux	29
6.1.1. Installing the Universal Package	30
6.1.1.1. Installing from the Command Line	32
6.1.2. Installing from the Repository	32
6.2. Upgrading Dr.Web Industrial for Linux	36
6.2.1. Getting Current Updates	36
6.2.2. Upgrading to a Newer Version	37
6.3. Uninstalling Dr.Web Industrial for Linux	40
6.3.1. Uninstalling the Universal Package	40
6.3.1.1. Uninstalling from the Command Line	41
6.3.2. Uninstallation of Dr.Web Industrial for Linux Installed from the Repository	41
6.4. Additional Information	44
6.4.1. Dr.Web Industrial for Linux Packages and Files	44
6.4.2. Custom Installation and Uninstallation of Components	46
6.5. Configuring Security Subsystems	51
6.5.1. Configuring SELinux Security Policies	52
6.5.2. Configuring PARSEC Permissions	55
6.5.3. Configuring ALT 8 SP and Other Distributions Using pam_namespace	58



6.5.4. Starting in CSE Mode (Astra Linux SE 1.6 and 1.7)	60
7. Getting Started	62
7.1. Registration and Activation	62
7.1.1. Key File	64
7.1.2. Connection Settings File	65
7.2. Testing Product Operation	65
7.3. File Monitoring Modes	66
8. Working with Dr.Web Industrial for Linux	69
8.1. Operating in Graphical Mode	70
8.1.1. Integration with the Desktop Environment	74
8.1.2. Starting and Closing	78
8.1.3. Threat Detection and Neutralization	79
8.1.3.1. Scanning on Demand	79
8.1.3.2. Scheduled Object Scanning	83
8.1.3.3. Managing Scan Tasks	84
8.1.3.4. File System Monitoring	87
8.1.3.5. Viewing Detected Threats	89
8.1.3.6. Managing Quarantine	92
8.1.4. Updating Anti-Virus Protection	95
8.1.5. License Manager	96
8.1.6. Viewing Messages From a Centralized Protection Server	105
8.1.7. Managing Application Privileges	108
8.1.8. Help and Reference	110
8.1.9. Operation Settings	110
8.1.9.1. Main Settings	111
8.1.9.2. File Scanning Settings	114
8.1.9.3. File System Monitoring Settings	116
8.1.9.4. Configuring Exclusions	118
8.1.9.4.1. Excluding Files and Directories	118
8.1.9.5. Scheduler Settings	119
8.1.9.6. Mode Settings	121
8.1.10. Additional Information	124
8.1.10.1. Command-Line Arguments	124
8.1.10.2. Starting Standalone Instance	125
8.2. Working from Command Line	125
9. Dr.Web Industrial for Linux Components	126



9.1. Dr.Web ConfigD	126
9.1.1. Operating Principles	126
9.1.2. Command-Line Arguments	128
9.1.3. Configuration Parameters	129
9.2. Dr.Web Ctl	131
9.2.1. Command-Line Call Format	133
9.2.2. General Options	133
9.2.3. Commands	134
9.2.3.1. Anti-Virus Scanning Commands	134
9.2.3.2. Commands to Manage Detected Threats and Quarantine	147
9.2.3.3. Configuration Management Commands	152
9.2.3.4. Advanced Commands	155
9.2.3.4.1. Commands to Manage Updates and Operation in Centralized Protection Mode	155
9.2.3.4.2. Information Commands	157
9.2.4. Usage Examples	161
9.2.5. Configuration Parameters	165
9.3. SplDer Guard	166
9.3.1. Operating Principles	166
9.3.2. Command-Line Arguments	169
9.3.3. Configuration Parameters	169
9.4. Dr.Web File Checker	177
9.4.1. Operating Principles	177
9.4.2. Command-Line Arguments	178
9.4.3. Configuration Parameters	179
9.5. Dr.Web Network Checker	181
9.5.1. Operating Principles	181
9.5.2. Command-Line Arguments	182
9.5.3. Configuration Parameters	183
9.6. Dr.Web Scanning Engine	189
9.6.1. Operating Principles	189
9.6.2. Command-Line Arguments	190
9.6.3. Configuration Parameters	193
9.7. Dr.Web Updater	197
9.7.1. Operating Principles	197
9.7.2. Command-Line Arguments	198



9.7.3. Configuration Parameters	198
9.8. Dr.Web ES Agent	204
9.8.1. Operating Principles	204
9.8.2. Command-Line Arguments	205
9.8.3. Configuration Parameters	205
9.9. Dr.Web MeshD	208
9.9.1. Operating Principles	208
9.9.2. Command-Line Arguments	210
9.9.3. Configuration Parameters	211
9.10. Dr.Web StatD	215
9.10.1. Operating Principles	215
9.10.2. Command-Line Arguments	215
9.10.3. Configuration Parameters	216
10. Appendices	218
10.1. Appendix A. Types of Computer Threats	218
10.2. Appendix B. Neutralizing Computer Threats	222
10.3. Appendix C. Technical Support	224
10.4. Appendix D. Dr.Web Industrial for Linux Configuration File	226
10.4.1. File Structure	226
10.4.2. Parameter Types	227
10.5. Appendix E. Generating SSL Certificates	231
10.6. Appendix F. Known Errors	234
10.7. Appendix G. List of Abbreviations	275



1. Introduction

The Dr.Web Industrial for Linux solution offers reliable protection of your computer from distribution of all possible types of [computer threats](#) by using the most advanced threat [detection](#) and neutralization technologies.

This manual is intended to help users of computers running operating systems of the GNU/Linux family (hereinafter, they will be referred to as Unix), to install and use Dr.Web Industrial for Linux.

If the previous version of Dr.Web Industrial for Linux is already installed on your computer and you wish to upgrade the product to an up-to-date version, follow the steps described in the upgrade procedure (see the [Upgrading to a Newer Version](#) section).



2. Conventions and Abbreviations

The following symbols and text conventions are used in this guide:

Convention	Comment
	An important note or instruction
	A warning about possible errors or important notes that require special attention
<i>Anti-virus network</i>	A new term or an emphasis on a term in descriptions
<code><IP-address></code>	Placeholders
Save	Names of buttons, windows, menu items and other program interface elements
CTRL	Names of keyboard keys
<code>/home/user</code>	Names of files and folders, code examples
Appendix A	Cross-references to document chapters or internal hyperlinks to webpages



Commands entered in the command line using a keyboard (in a terminal or a terminal emulator) are marked with the command prompt character `$` or `#` in the manual. The character indicates the privileges required for running the specified command. According to the standard convention for Unix-based systems:

`$`—command can be run with user rights.

`#`—command must be run with superuser (usually *root*) privileges. To elevate the privileges, use `su` and `sudo` commands.

The list of abbreviations is provided in the [Appendix G. List of Abbreviations](#) section.



3. About This Product

Function

Dr.Web Industrial for Linux is designed to protect files of physical and virtual workstations running OSES of the GNU/Linux family from viruses and other types of malware, as well as to prevent distribution of threats for various platforms. When operating in centralized protection mode, Dr.Web Industrial for Linux is controlled by a server managed by Dr.Web Industrial. By default, Dr.Web Industrial for Linux does not interfere with the operating system and only notifies the user of detected threats; this allows to use the anti-virus solution in an industrial infrastructure, in which emergency shutdown of machinery and outage are unacceptable.

Data protection

Main components (scan engine and virus databases) are not only highly effective and resource-sparing, but also cross-platform, which lets Doctor Web experts create reliable anti-virus solutions protecting computers running popular operating systems from threats that target various platforms. Currently, along with Dr.Web Industrial for Linux, Doctor Web offers other anti-virus solutions for Unix-like operating systems (GNU/Linux and FreeBSD), macOS and Windows. Moreover, other anti-virus products have been developed to deliver protection for devices running Android and Aurora OSES.

Components of Dr.Web Industrial for Linux are constantly updated, and virus databases are regularly supplemented with new records to ensure up-to-date protection of files of physical and virtual workstations. For additional protection against unknown malware, heuristic analysis methods implemented by the anti-virus engine are used.

Operation in infrastructure

Before using Dr.Web software, you must make sure there are no conflicts between the anti-virus software and the software and/or firmware of your corporate infrastructure. Install all the latest updates and perform all secure configuration steps outlined in this documentation. If critical corporate infrastructure segments interface with Dr.Web software, it is strongly recommended that all updates to program modules and virus databases be tested in an isolated test environment.

Additional information:

- [Basic Features of Dr.Web Industrial for Linux](#)
- [Structure of Dr.Web Industrial for Linux](#)
- [Putting in Quarantine](#)
- [File Permissions](#)
- [Operation Modes](#)



3.1. Basic Features of Dr.Web Industrial for Linux

The basic features of Dr.Web Industrial for Linux:

1. **Detection and neutralization of threats.** Scanning for malicious programs of any kind (various viruses including those that infect mail files and boot records, trojans, email worms and so on) and unwanted software (adware, joke programs and dialers). For details on threat types, refer to [Appendix A. Types of Computer Threats](#).

The product uses the following methods to detect malicious and unwanted programs:

- *A signature analysis.* A scan method enabling detection of already known threats covered by virus databases.
- *A heuristic analysis.* A set of scan methods enabling detection of threats that are not known yet.



The heuristic analyzer may cause false-positive detections. Thus, objects that contain threats detected by the analyzer are considered “suspicious”. It is recommended that you quarantine such files and send them for analysis to the Doctor Web anti-virus laboratory. For details on the methods used to neutralize threats, refer to [Appendix B. Neutralizing Computer Threats](#).

File system scanning can be started on demand or automatically on schedule. Both a full scan (scanning of all file system objects available to the user) and a custom scan (scanning of individual directories or files) can be performed. Furthermore, the user can start an individual scan of volume boot records and executable files that ran currently active processes. In the latter case, if a threat is detected, the malicious executable file is neutralized and all processes run from this file are forced to terminate.

For operating systems with a graphical desktop environment, [integration](#) of file scanning with either a taskbar or a graphic file manager is available. For systems that implement mandatory access control with different access levels, files that are not available for the current level can be scanned in special [standalone instance](#) mode.

All objects containing threats detected in the file system are registered in a permanent threat registry, except those threats that were detected in standalone instance mode.

The [command-line tool](#) supplied with Dr.Web Industrial for Linux allows scanning file systems of remote network hosts for threats. The hosts provide remote terminal access via SSH or Telnet.



Remote scanning can only be used to detect malicious and suspicious files on a remote host. To eliminate the detected threats on the remote host, use administration tools provided directly by this host. For example, for routers and other smart devices, update the firmware; for computing machines, connect to them (using a remote terminal is one of the options) and perform the necessary operations on the file system (remove or move files and so on), or run the anti-virus software installed on them.

2. **Monitoring access to files.** This mode tracks access to data files and an attempt to run executables. This allows you to detect and neutralize malware when it attempts to infect the



computer. In addition to the standard monitoring mode, you can use the [enhanced](#) (or Paranoid) mode, so that the monitor blocks access to files until the scan is completed (this helps prevent access to files that contain a threat; however, a scan result becomes known only after the application accesses the file). The enhanced monitoring mode increases security, but slows down access of applications to unscanned files.

3. **Reliable isolation of infected or suspicious objects** in special storage known as quarantine to prevent any damage to the system. When quarantined, the objects are renamed according to specific rules and, if necessary, such objects can be restored to their original location only on user demand.
4. **Automatic updating** of Dr.Web virus databases and the scan engine to maintain a high level of protection against malware.
5. **Collection of statistics** on threat events, logging detected threats (available only via the command line tool).
6. **Operation in centralized protection mode** to implement single security policies adopted for an anti-virus network comprising this computer and managed by Dr.Web Industrial.

3.2. Structure of Dr.Web Industrial for Linux

Dr.Web Industrial for Linux is a software suite consisting of a set of components, where each component has its own set of functions. The components are separated into the following categories according to their objectives:

- [Basic anti-virus components](#) that form the Dr.Web Industrial for Linux core. In the absence of the components under this category, the product cannot scan files (and other data) for viruses and other threats.
- [Threat search components](#). These components are used to solve Dr.Web Industrial for Linux basic tasks—detecting threats and potentially dangerous objects. In their operation the components falling under this category use basic anti-virus components.
- [Service components](#) that complete auxiliary tasks to maintain anti-virus protection (updating anti-virus databases, connecting to centralized protection servers, managing general Dr.Web Industrial for Linux operation and so on).
- [Interface components](#) that provide (the user or third-party applications) with the Dr.Web Industrial for Linux management interface.

Below is the list of Dr.Web Industrial for Linux components.

3.2.1. Basic Anti-Virus Components

Component	Description
Dr.Web Virus-Finding Engine	Anti-virus engine. Implements algorithms to detect viruses and other malware (by using signature and heuristic analyses). Managed by the Dr.Web Scanning Engine component



Component	Description
	Library file: <code>drweb32.dll</code>. Logged internal name: <code>CoreEngine</code>
Dr.Web Scanning Engine	Scanning engine. This component loads Dr.Web Virus-Finding Engine and virus databases. • Passes the contents of files and boot records to the anti-virus engine for scanning. • Manages a queue of the files to be scanned. • Cures threats to which this action is applicable. Operates under the control of the Dr.Web ConfigD daemon or in standalone mode. Used by the Dr.Web File Checker and Dr.Web Network Checker components. Also can be used by the Dr.Web MeshD component (in particular modes) and by external (in relation to Dr.Web Industrial for Linux) applications using directly the Dr.Web Scanning Engine API Executable file: <code>drweb-se</code>. Logged internal name: <code>ScanEngine</code>
Virus databases	Automatically updated database of signatures of viruses and other threats, as well as of malware detection and neutralization algorithms. Used by Dr.Web Virus-Finding Engine and is supplied with it
Dr.Web File Checker	Component for scanning file system objects and a quarantine manager. • Receives tasks from the threat scanning component on scanning files in the local (relative to Dr.Web Scanning Engine) file system. • Surfs the file system directories according to the task, sends files for scanning to Dr.Web Scanning Engine and notifies the client components about the scanning progress. • Deletes infected files, puts them in and restores them from quarantine, manages quarantine directories. • Builds the cache and keeps it up-to-date. The cache contains information about previously scanned files to reduce the frequency of rescanning files. Used by components that scan file system objects, such as SpIDer Guard Executable file: <code>drweb-filecheck</code>. Logged internal name: <code>FileCheck</code>
Dr.Web Network Checker	Network data scanning agent. • Used to send data to the scanning engine for actual scanning. The data is sent by components of the product via the network.



Component	Description
	Allows Dr.Web Industrial for Linux to manage distributed file scanning: to receive/transmit files for scanning from/to remote hosts. For that purpose, remote hosts must feature an installed and running Dr.Web for Unix operating systems. In the distributed scanning mode, it allows automatic distribution of scanning load among available hosts by reducing load on hosts with a large number of scanning tasks (for example, on mail servers and internet gateways). If the network contains partner hosts that can receive data for scanning, the components that use Dr.Web Network Checker for scanning may operate without local Dr.Web Scanning Engine. Thus, local Dr.Web Scanning Engine, Dr.Web Virus-Finding Engine and virus databases may be absent. For security reasons, files are transmitted over the network using SSL Executable file: <code>drweb-netcheck</code>. Logged internal name: <code>NetCheck</code>
Dr.Web MeshD	Component that connects Dr.Web Industrial for Linux to a local cloud, which allows Dr.Web for Unix products to exchange updates, results of file scanning, transmit files to each other for scanning, as well as to provide scanning engine services directly. If this component is included in the product and the local cloud to which it is connected contains hosts providing scanning engine services, local Dr.Web Scanning Engine, Dr.Web Virus-Finding Engine and virus databases may be absent Executable file: <code>drweb-meshd</code>. Logged internal name: <code>MeshD</code>

3.2.2. Threat Search Components

Component	Description
Scanner	Component that performs scanning of file system objects (files, directories and boot records) for threats on user demand or on schedule. The user can start scanning either in graphical mode or in command line mode .
SpIDer Guard	GNU/Linux File System Monitor. Operates in background mode and controls file operations (such as creation, opening, closing, running) in GNU/Linux file systems. It sends the Dr.Web File Checker component requests to scan new or modified files as well as executables of programs when they are run.



Component	Description
	Operates with a file system using the <i>fanotify</i> system mechanism. The monitor can operate in enhanced or "paranoid" mode, blocking access to the files that have not been scanned yet until the scan is complete. By default, a regular monitoring mode is enabled.  The component is supplied only with the distributions designed for GNU/Linux OSes. Executable file: <code>drweb-spider</code>. Logged internal name: <code>LinuxSpider</code>

3.2.3. Service Components

Component	Description
Dr.Web ConfigD	Dr.Web Industrial for Linux configuration daemon. • Starts and stops other product components depending on the settings. • Restarts components if a failure in their operation occurs. Starts components at the request of other components. Informs active components when another component starts or shuts down. • Stores information about current license keys and settings and provides this information to all components. Receives adjusted settings and license keys from the designated components of Dr.Web Industrial for Linux. Notifies other components of changes in license keys and settings Executable file: <code>drweb-configd</code>. Logged internal name: <code>ConfigD</code>
Dr.Web ES Agent	Centralized protection agent. Ensures product operation in the centralized protection and mobile modes. • Provides connection between the product and the centralized protection server, receives a license key file, updates of the virus databases and anti-virus engine. • Sends the information about the Dr.Web Industrial for Linux components, their status and statistics on threat events to the server Executable file: <code>drweb-esagent</code>. Logged internal name: <code>ESAgent</code>
Dr.Web StatD	Component for storing Dr.Web Industrial for Linux component operation events.



Component	Description
	Receives and stores product component events, such as unexpected shutdown, threat detection and so on. Executable file: <code>drweb-statd</code>. Logged internal name: <code>StatD</code>
Dr.Web Updater	Updating component. Downloads updates of virus databases, the anti-virus engine from Doctor Web servers. The updates can be downloaded automatically, on schedule, and on user demand (via the Dr.Web Ctl utility) Executable file: <code>drweb-update</code>. Logged internal name: <code>Update</code>

3.2.4. Interface Components

Component	Description
Graphical Management Interface	Component that provides a window graphical interface for management of Dr.Web Industrial for Linux. It allows the user to run scanning of file system objects in graphical mode, manage operation of the SplDer Guard monitor, view quarantined objects, start receiving updates and also configure Dr.Web Industrial for Linux operation.
Notification Agent	Component that operates in background mode. It displays pop-up notifications on events and the Dr.Web Industrial for Linux indicator in the notification area, runs scheduled scanning. By default it is started together with a user session in the desktop environment.
License Manager	Component that facilitates managing licenses in graphical mode. It allows to activate a license or a demo period, view information about the current license, renew it, and install or remove a license key file.
Dr.Web Ctl	Tool designed to manage Dr.Web Industrial for Linux from the command line. Allows the user to start file scanning, view and manage quarantined objects, start a virus database update procedure, connect Dr.Web Industrial for Linux to or disconnect it from a centralized protection server, view and change product parameters Executable file: <code>drweb-ctl</code>. Logged internal name: <code>Ctl</code>



For details on Dr.Web Industrial for Linux components, refer to [Dr.Web Industrial for Linux Components](#).

3.3. Putting in Quarantine

The quarantine of Dr.Web Industrial for Linux is a system of directories designed to isolate files containing detected threats that cannot be currently cured for some reason. For example, a detected threat can be incurable because Dr.Web Industrial for Linux is still unaware of it (for example, the threat was detected by the heuristic analyzer, but the virus databases do not cover the threat signature and a method to cure) or curing causes errors. Moreover, a file can be quarantined on user demand if the user selected the corresponding [action](#) in the list of detected threats or specified this action in settings as a reaction to [threats of a specific type](#).

When a file is quarantined, it is renamed according to special rules to prevent its identification by users and applications and inhibit accessing it without quarantine management tools implemented in Dr.Web Industrial for Linux. Moreover, when a file is quarantined, its execution bit is always reset to prevent running this file.

Quarantine directories are located in:

- *user home directory* (if multiple user accounts exist on the computer, a separate quarantine directory can be created for each of the users);
- *root directory of each logical volume* mounted on the file system.

Dr.Web Industrial for Linux quarantine directories are always named `.com.drweb.quarantine` and are not created until the **"Quarantine"** (QUARANTINE) [action](#) is applied, that is, quarantine directories are not created until a threat is detected. At that, only a directory required for isolation of the file is created. When selecting the directory, the name of the file owner is used. Search is performed upwards from the directory containing the file to the file system root `/`; if the home directory of the owner is reached, the file is isolated in the quarantine directory under the home directory. Otherwise, the file is isolated in the quarantine directory created under the volume root directory (which is not always the same as the file system root directory). Thus, any infected file put in quarantine is always kept on the same volume, which provides for correct operation of quarantine in case there are removable data storage devices and other volumes that can be mounted in the file system occasionally and on different mount points.

A user can manage quarantine contents either in [graphical mode](#) or in [command-line mode](#) using the [Dr.Web Ctl](#) utility. At that, all currently available quarantine directories containing isolated objects are always processed as a single entity. From the point of view of a user who views the contents of the combined quarantine, the quarantine directory located in the home directory is a *User* quarantine, and all other quarantine directories are a *System* quarantine.



You can manage quarantine even if no active [license](#) was found; however, isolated objects cannot be cured in this case.



3.4. File Permissions

To scan objects of the file system and neutralize threats, Dr.Web Industrial for Linux (or rather the user under whom it runs) requires the following permissions:

Action	Required rights
<i>Listing all detected threats</i>	Unrestricted. No special permission required.
<i>Output of container contents (an archive, email file, and so on)</i> (display only corrupted or malicious elements)	Unrestricted. No special permission required.
<i>Moving to quarantine</i>	Unrestricted. The user can quarantine all infected files regardless of read or write permissions on them.
<i>Deleting threats</i>	The user needs to have write permissions for the file that is being deleted.  If a threat is detected in a file inside a container (an archive, an email message and so on), the container is quarantined and not deleted.
<i>Curing</i>	Unrestricted. The access permissions and owner of a cured file remain the same after curing.  The file can be removed if deletion can cure the detected threat.
<i>Restoring a file from quarantine</i>	The user should have permissions to read the file and to write to the restore directory.
<i>Deleting a file from quarantine</i>	The user must possess write permissions to the file that was moved to quarantine.



To temporarily elevate permissions of Dr.Web Industrial for Linux running in graphical mode, use the [corresponding button](#) in Dr.Web Industrial for Linux window (which is available and displayed only if the privileges must be elevated to complete an operation).

To start the [Dr.Web Ctl](#) command-line management tool with superuser privileges (usually `root`), use the `su` command to change the user or the `sudo` command to run the command as another user.



3.5. Operation Modes

In this section

- [Centralized protection concept](#)
- [Connecting to a centralized protection server](#)
- [Disconnecting from a centralized protection server](#)

Dr.Web Industrial for Linux can operate either in standalone mode or as a part of a corporate or private *anti-virus network* managed by a *centralized protection server*. Such operation mode is called a *centralized protection mode*. Using this mode does not require installation of additional software or Dr.Web Industrial for Linux re-installation or uninstallation.

- In *standalone mode*, a protected computer is not connected to the anti-virus network and its operation is managed locally. In this mode, configuration and license key files are located on local disks and Dr.Web Industrial for Linux is fully managed by the protected computer. Updates for virus databases are received from Doctor Web update servers.
- In *centralized protection mode*, protection of the computer is managed by the centralized protection server. In this mode, some functions and settings of Dr.Web Industrial for Linux can be adjusted in accordance with the general (corporate) anti-virus protection policy implemented on the anti-virus network. The license key file used for operating in centralized protection mode is received from the centralized protection server to which Dr.Web Industrial for Linux is connected. The license or demo key file stored on the local computer, if any, is not used. Statistics on threat events together with information on Dr.Web Industrial for Linux operation are sent to the centralized protection server. Updates for virus databases are also received from the centralized protection server. Configuring the centralized protection mode is described in the Dr.Web Enterprise Security Suite Administrator Manual for managing Dr.Web Industrial for Linux.
- In *mobile mode*, Dr.Web Industrial for Linux receives updates from Doctor Web update servers, but uses settings stored locally and a custom license key file that were received from the centralized protection server.

When Dr.Web Industrial for Linux operates in centralized protection mode or mobile mode, the following options are blocked:

- deletion of a license key file in License Manager;
- manual start of an update process and adjustment of update settings;
- configuration of file system scanning parameters.

A possibility of configuring the settings of the SpIDer Guard file system monitor as well as enabling or disabling it while Dr.Web Industrial for Linux is controlled by the centralized protection server are dependent on permissions specified on the server.



[Scheduled scanning](#) is unavailable in centralized protection mode.

If starting scanning on user demand is prohibited on the centralized protection server, the page for [starting scanning](#) and the **Scanner** button on the Dr.Web Industrial for Linux window will be disabled.

Centralized protection concept

Doctor Web solutions for managing centralized protection use a client-server model (see the figure below).

Corporate computers or computers of clients of an IT service provider are protected by *local anti-virus components* (in this case, by Dr.Web Industrial for Linux), which ensure anti-virus protection and maintain connection to the centralized protection server.

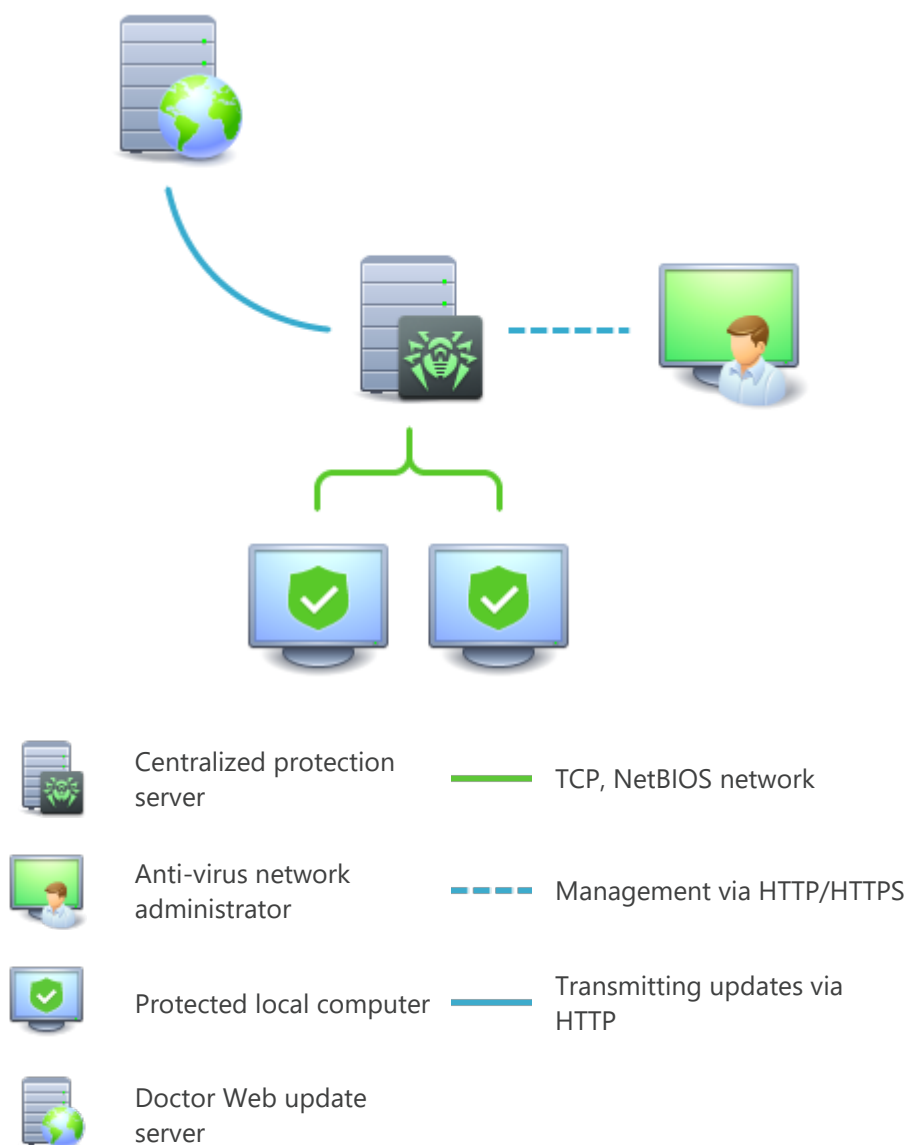


Figure 1. Logical structure of the anti-virus network

Local components are updated and configured from the *centralized protection server*. The entire stream of instructions, data and statistics in the anti-virus network also passes the centralized protection server. The volume of traffic between protected computers and the centralized protection server can be significant, therefore an option for traffic compression is provided. Using encryption while sending data prevents a leak of sensitive data or substitution of software downloaded onto protected computers.

All necessary updates are downloaded to the centralized protection server from Doctor Web update servers.

Changes in the configuration of local anti-virus components and command transfer are performed by anti-virus network administrators using the centralized protection server. The administrators manage configuration of the centralized protection server and topology of the anti-virus network (for example, they validate connection of a local station to the network) and configure operation of individual local anti-virus components when necessary.



Local anti-virus components are incompatible with anti-virus products of other companies or Dr.Web anti-virus solutions if the latter do not support operation in the centralized protection mode (for example, Dr.Web for Linux version 5.0). Installation of two anti-virus programs on the same computer can cause a system crash or a loss of important data.

The centralized protection mode allows exporting and saving Dr.Web Industrial for Linux operation reports using the centralized protection server. Reports can be exported and saved in the following formats: HTML, CSV, PDF and XML.

Connecting to a centralized protection server

Dr.Web Industrial for Linux can be connected to the centralized protection server of the anti-virus network in one of the following ways:

- on the **Mode** [tab](#) of the Dr.Web Industrial for Linux [configuration page](#);
- using the `esconnect` [command](#) of the `drweb-ctl` command-line management tool.



For the verification of the centralized protection server the certificate corresponding to the unique public key of the server is used. By default, the [Dr.Web ES Agent](#) centralized protection agent will not allow you to connect to the server unless you specify a certificate file. The certificate file must first be obtained from the administrator of the anti-virus network served by the server to which you want to connect Dr.Web Industrial for Linux.

If Dr.Web Industrial for Linux is connected to the centralized protection server, you can switch the product into the mobile mode or switch it back into the centralized protection mode. Switching the mobile mode on or off is accomplished with the help of the `MobileMode` [configuration parameter](#) of the [Dr.Web ES Agent](#) component.



Dr.Web Industrial for Linux can switch to the mobile mode only if this is allowed by the settings of the centralized protection server.

Disconnecting from a centralized protection server

Dr.Web Industrial for Linux can be disconnected from the centralized protection server of the anti-virus network in one of the following ways:

- on the **Mode** [tab](#) of the Dr.Web Industrial for Linux [configuration page](#);
- using the `esdisconnect` [command](#) of the `drweb-ctl` command-line management tool.



4. System Requirements and Compatibility

In this section

- [System requirements](#)
- [List of supported operating system versions](#)
- [Required additional components and packages](#)
- [Compatibility with components of operating systems](#)
- [Compatibility with security subsystems](#)

System requirements

You can use Dr.Web Industrial for Linux on a computer that meets the following requirements:

Parameter	Requirements
<i>Platform</i>	Processors of the following architectures and command systems are supported: • Intel/AMD: 32-bit (<i>IA-32, x86</i>); 64-bit (<i>x86-64, x64, amd64</i>) • ARM64 • E2K (<i>Elbrus</i>) • IBM POWER9, Power10 (<i>ppc64el</i>)
<i>Random Access Memory (RAM)</i>	At least 500 MB of free RAM (1 GB or more recommended).
<i>Space on hard disk</i>	At least 2 GB of free disk space on the volume where Dr.Web Industrial for Linux directories are stored.
<i>Operating system</i>	GNU/Linux based on kernel ver. 2.6.37 or later, and using PAM and <code>glibc</code> library ver. 2.13 or later, <code>systemd</code> initialization system ver. 209 or later. The supported GNU/Linux distributions are listed below.
<i>Other</i>	The following valid network connections: • An internet connection to download updates. • When operating in centralized protection mode, connection to the server on the local network is enough; connection to the internet is not required.

To enable the correct operation of Dr.Web Industrial for Linux, open the following ports:

Purpose	Direction	Port numbers
To receive updates	outgoing	80



Dr.Web Industrial for Linux is incompatible with other anti-virus programs. To avoid system errors and data loss that may occur when installing two anti-viruses on one computer, uninstall all other anti-virus programs prior to the installation of Dr.Web Industrial for Linux.

List of supported operating system versions

The following GNU/Linux distributions are supported:

Platform	Supported GNU/Linux versions
x86_64	• ALT 8 SP • ALT Server 9, 10, 11 • ALT Workstation 9, 10, 11 • Astra Linux Common Edition (Orel) 2.12 • Astra Linux Special Edition 1.6 (with cumulative patch 20200722SE16), 1.7, 1.8 • CentOS 7, 8 • Debian 9, 10, 11, 12, 13 • Fedora 37, 38 • GosLinux IC6 • Red Hat Enterprise Linux 7, 8 • RED OS 7.2 MUROM, RED OS 7.3 MUROM, RED OS 8 • SUSE Linux Enterprise Server 12 SP3 • Ubuntu 18.04, 20.04, 22.04, 24.04
x86	• ALT 8 SP • ALT Workstation 9, 10 • CentOS 7 • Debian 10
ARM64	• ALT 8 SP • ALT Server 9, 10, 11 • ALT Workstation 9, 10, 11 • Astra Linux Special Edition (Novorossiysk) 4.7 • CentOS 7, 8 • Debian 11, 12 • Ubuntu 18.04
E2K	• ALT 8 SP • ALT Server 10 • ALT Workstation 10



Platform	Supported GNU/Linux versions
	• Astra Linux Special Edition (Leningrad) 8.1 (with cumulative patch 8.120200429SE81) • Elbrus-D MCST 1.4 • GS CS Elbrus 8.32 TVGI.00311-28
ppc64el	• CentOS 8 • Ubuntu 20.04



Mandatory access control is not supported on Elbrus-D MCST 1.4 and GosLinux IC6.

For other GNU/Linux distributions that meet the abovementioned requirements, full compatibility with Dr.Web Industrial for Linux is not guaranteed. If a compatibility issue occurs, contact our [technical support](#).

Required additional components and packages

- To enable Dr.Web Industrial for Linux operation in graphical mode, the X Window System graphics subsystem and any window manager are required. Moreover, the correct operation of the [indicator](#) on the Ubuntu Dock panel may depend on an additional library (by default, the `libappindicator1` library is required).
- To start the installer or uninstaller designed for the command line in the graphical mode, a terminal emulator (such as `xterm` or `xvt`) is required.
- To elevate privileges during installation or uninstallation, one of the following utilities is required: `su`, `sudo`, `gksu`, `gksudo`, `kdesu`, or `kdesudo`. For correct operation of Dr.Web Industrial for Linux, PAM must be used in the operating system.



For convenient work with Dr.Web Industrial for Linux from the [command line](#), it is recommended to enable command auto-completion in your command shell (if disabled).

If you encounter any issue with installation of additional packages and components, refer to manuals for your distribution.

Compatibility with components of operating systems

The SplDer Guard monitor uses the fanotify system mechanism.



SplDer Guard can operate in enhanced or "paranoid" mode (blocks access to the files that have not been scanned yet), only via the fanotify system mechanism and providing that the OS kernel is built with the enabled `CONFIG_FANOTIFY_ACCESS_PERMISSIONS` option.



Compatibility with security subsystems

By default, Dr.Web Industrial for Linux does not support the SELinux security subsystem. Moreover, Dr.Web Industrial for Linux operates by default in a reduced functionality mode on the GNU/Linux systems that use mandatory access models (for example, on the systems distributed with the PARSEC mandatory access subsystem, which assigns different privilege levels, so-called mandatory levels, to users and files).

To install Dr.Web Industrial for Linux on systems with SELinux (as well as on systems that use mandatory access control models), you may have to additionally configure security subsystems to enable full functionality of Dr.Web Industrial for Linux. For details, refer to the [Configuring Security Subsystems](#) section.



5. Licensing

The rights to use Dr.Web Industrial for Linux are granted by a license purchased from the Doctor Web company or from its partners. License parameters determining user rights are set in accordance with the [License agreement](#) , which the user accepts during Dr.Web Industrial for Linux installation. The license contains information on the user and the vendor as well as usage parameters of the purchased product, including:

- a list of components licensed to the user;
- a Dr.Web Industrial for Linux license period;
- other restrictions (for example, a number of computers on which the purchased copy of Dr.Web Industrial for Linux is allowed for use).

Each Doctor Web product license has a unique serial number associated with a special file stored on the local computer. This file regulates operation of the Dr.Web Industrial for Linux components in accordance with the license parameters and is called a *license key file*.

You can activate a *demo period* for evaluation purposes. Upon activating the demo period, you gain the right to use the installed copy of Dr.Web Industrial for Linux with full functionality for this entire period if its activation requirements are observed. At that, a special key file named a *demo key file* is automatically generated.

To use a demo period, fill out the [web form](#) . Each request is considered individually. If it is approved, a custom serial number or an archive with a demo key file will be sent to a specified email address.

If there is no valid license or a demo period is not activated (including cases when a license purchased earlier or a demo period is expired), anti-virus functions of Dr.Web Industrial for Linux are blocked. Furthermore, the service for receiving updates for Dr.Web virus databases from Doctor Web update servers becomes unavailable. However, you can activate the Dr.Web Industrial for Linux by connecting it to a centralized protection server as a part of an [anti-virus network](#) administered by an enterprise or an internet service provider. In this case, anti-virus functions and updates of the product instance installed on the computer included in the anti-virus network are managed by the centralized protection server.



6. Installing and Uninstalling

This section describes how to install and uninstall Dr.Web Industrial for Linux, as well as how to obtain current updates and upgrade to a new version, if an earlier version of Dr.Web Industrial for Linux is already installed on your computer.

Moreover, this section describes the procedure of custom installation and uninstallation of the Dr.Web Industrial for Linux components (for example, to resolve errors that occurred during the operation of Dr.Web Industrial for Linux or to install the product with a limited function set) and configuration of advanced security subsystems (such as SELinux) that could be necessary for installation or operation of Dr.Web Industrial for Linux.

To perform these procedures, superuser (usually the *root* user) privileges are required. To gain superuser privileges, use the `su` command to change the current user or the `sudo` command to run the specified command as another user.



Compatibility of Dr.Web Industrial for Linux with anti-virus products of other developers is not guaranteed. Due to the fact that the installation of two anti-viruses on one computer can cause errors of the operating system and a loss of important data, it is strongly recommended that you uninstall anti-virus products of other developers before the installation of Dr.Web Industrial for Linux.

If your computer already has another Dr.Web anti-virus product installed from the [universal package](#) (`.run`), and you want to install one more Dr.Web anti-virus product (for example, you have Dr.Web Server Security Suite installed from the universal package, and you want to install Dr.Web Industrial for Linux in addition to it), it is necessary to make sure that the version of the already installed product is the same as the version of Dr.Web Industrial for Linux to be installed. If the version of the product to be installed is newer than the installed product version, it is necessary, before installation, to [upgrade](#) the installed Dr.Web Industrial for Linux to the version of the product you want to install additionally.

Additional information:

- [Installing Dr.Web Industrial for Linux](#)
- [Upgrading Dr.Web Industrial for Linux](#)
- [Uninstalling Dr.Web Industrial for Linux](#)
- [Configuring Security Subsystems](#)
- [Dr.Web Industrial for Linux Packages and Files](#)
- [Custom Installation and Uninstallation of Components](#)



6.1. Installing Dr.Web Industrial for Linux

To install Dr.Web Industrial for Linux, do one of the following:

1. Download the installation file, which is a [universal package](#) for Unix systems, from the Doctor Web official website. The package is supplied with a console installer; its operation in the graphical desktop mode requires a terminal emulator.
2. Install Dr.Web Industrial for Linux as a set of [native packages](#) (to do that, connect to the corresponding package repository of Doctor Web).



It is recommended to install Dr.Web Industrial for Linux from a [universal package](#) on ALT 8 SP and other OSES that use outdated versions of a package manager.

After installing Dr.Web Industrial for Linux, the IMA/EVM subsystem of ALT 8 SP 11100-01 can issue a warning about potential integrity violation. To avoid this warning, run the command after installing Dr.Web Industrial for Linux:

```
# integalert fix
```

ALT 8 SP 11100-02 and ALT 8 SP 11100-03 OSES are not subjected to this issue.



After installing Dr.Web Industrial for Linux using any of the methods provided in this manual, you will need to activate the license or install the key file. In addition, you can [connect](#) Dr.Web Industrial for Linux to a centralized protection server (for details, refer to the [Licensing](#) section). Until that, *anti-virus protection is disabled*. In addition, in some cases it is necessary to configure the basic functionality of Dr.Web Industrial for Linux, as described in the [Getting Started](#) section.

Dr.Web Industrial for Linux installed using any of the methods provided in this section can be [uninstalled](#) or [updated](#) if fixes for its components are available or a new version of Dr.Web Industrial for Linux is released. If required, you can also [configure GNU/Linux security subsystems](#) for correct operation of Dr.Web Industrial for Linux. If an issue with individual components occurs, you can perform their [custom installation and uninstallation](#) without uninstalling Dr.Web Industrial for Linux.



6.1.1. Installing the Universal Package

The Dr.Web Industrial for Linux universal package is distributed as an installation file named `drweb-<version>-industrial-linux-<platform>.run`, where *<platform>* is the platform for which Dr.Web Industrial for Linux is intended (x86 for 32-bit platforms, amd64, arm64, e2s and ppc64el for 64-bit platforms), for example:

```
drweb-11.1.0-industrial-linux-amd64.run
```



The name of the installation file corresponding to the above-mentioned format is referred to as *<.run file name>*, and a path to this file—as *<.run file path>* below in this section.

The version of Dr.Web Industrial for Linux is defined by the first two dot-separated figures in the name of the universal package.

To install Dr.Web Industrial for Linux components

1. If you do not have the installation file (universal package), download it from the [official website](#)  of the Doctor Web company.
2. Save the installation file to the hard disk drive of the computer to any writeable directory (for example, `/home/<username>`, where *<username>* is the current user name).
3. Allow the file to start, for example, by running the command:

```
# chmod +x <.run file path>
```

4. Start it by running the command:

```
# <.run file path>
```

or use a standard file manager of your graphical shell for both changing the file properties (permissions) and running the file.



If you install Dr.Web Industrial for Linux on the Astra Linux SE OS of versions 1.6 and 1.7 operating in *closed software environment* (CSE) mode, the installer can fail to start because the Doctor Web public key is not on the list of trusted keys. In this case, configure the CSE mode (see [Starting in CSE Mode \(Astra Linux SE 1.6 and 1.7\)](#)) and start the installer again.

First, an integrity check of the archive is run, after which the archived files are unpacked to a temporary directory and the installer is started. If the installer is started without root privileges, it attempts to elevate its privileges asking you for the root password (the `sudo` utility is used). If the attempt fails, the installation process aborts.



If the file system partition containing the temporary directory has not enough free space for the unpacked files, the installation process is aborted and a corresponding message is displayed. In this case, change the value of the `TMPDIR` system environment variable so that it points to a directory located on a partition with enough free space and restart the installation. You can also use the `--target` option to set the target directory (for more details, see the [Custom Installation and Uninstallation of Components](#) section).

An installer for a [command-line mode](#) runs (to run it in a graphical desktop environment, you need a terminal emulator).

5. Follow the installer instructions.

You can also start the installer in silent mode by running the command:

```
# <.run file path> -- --non-interactive
```

In this case the installer is started in silent mode without displaying program dialogs of the command-line mode.



Using this option means that you accept the terms of the Dr.Web License Agreement. After installing Dr.Web Industrial for Linux, you can find the License Agreement text in the file `/opt/drweb.com/share/doc/LICENSE`. The file extension indicates the language of the License Agreement. The `LICENSE` file (without any extension) stores the Dr.Web License Agreement in English. If you do not accept the terms of the License Agreement, you must [uninstall](#) Dr.Web Industrial for Linux after its installation.

Superuser (usually the `root` user) privileges are required to start the installer in silent mode. To elevate your privileges, use the `su` or `sudo` command.



If the GNU/Linux distribution you use features the SELinux security subsystem, it can interrupt the installation process. If such situation occurs, temporarily set SELinux to the *Permissive* mode. To do this, run the command:

```
# setenforce 0
```

Restart the installer afterwards. When the installation completes, configure SELinux [security policies](#) to enable correct operation of the product components.

All unpacked installation files are deleted once the installation process completes.



It is recommended that you save the `.run` file used for the installation to reinstall Dr.Web Industrial for Linux or its components without the need to update its version.

When the installation completes, the **Dr.Web** group appears on the **Applications** menu in your desktop graphical shell. The group comprises the **Dr.Web Industrial** item to start the product in [graphical mode](#).



The program [indicator](#) automatically appears in the notification area after the user logs in again.



For correct operation of Dr.Web Industrial for Linux, it may be necessary to install packages specified in the [System Requirements and Compatibility](#) section (for example, the library that enables support for 32-bit applications installed on a 64-bit platform and `libappindicator1`, which is a library for correct display of the program [indicator](#) in the notification area).

6.1.1.1. Installing from the Command Line

Once the installation program for the command line starts, the command prompt is displayed on the screen.

1. To start installation, enter `Yes` or `Y` in response to the "Do you want to continue?" question. To exit the installer, enter `No` or `N`. In this case, the installation will be canceled.
2. After that, you need to view the terms of the Doctor Web License Agreement displayed on the screen. Press `ENTER` to scroll the text down one line or `SPACEBAR` to scroll down one screen.



There are no options to scroll the License Agreement up.

3. Once you have read the License agreement, you are prompted to accept its terms. Enter `Yes` or `Y` if you accept the License agreement. If you refuse to accept it, enter `No` or `N`. In the latter case, the installer exits.
4. After you accept the terms of the License Agreement, the installation of the Dr.Web Industrial for Linux components automatically starts. During the procedure, the information about the installation process (installation log), including the list of installed components, is displayed on the screen.
5. After the installation completes successfully, the installer exits.

If an error occurs, a message describing the error is displayed on the screen, and then the installer exits. When the installation process fails due to an error, resolve the issues that caused this error and start the installation again.

To start working with installed Dr.Web Industrial for Linux, use any desirable [starting method](#).

6.1.2. Installing from the Repository

Native packages of Dr.Web Industrial for Linux are stored in the Dr.Web [official repository](#) . Once you have added the Dr.Web repository to the list of those used by your operating system package manager, you can install the product from native packages the same way you install any other programs from the operating system repositories. Required dependencies are automatically resolved. Furthermore, in case of installing Dr.Web Industrial for Linux from the connected repository your OS package manager detects updates for all Dr.Web components and suggests installing them.



To access the Dr.Web repository, internet access is required.

All the commands mentioned below, which are used to add repositories, import digital signature keys, install and uninstall packages, must be run with superuser (usually the *root* user) privileges. To elevate your privileges, use the `su` command to change the current user or the `sudo` command to run the specified command as another user.

Steps below are for the following OSes (package managers):

- [Astra Linux, Debian, Mint, Ubuntu \(apt\)](#);
- [ALT \(apt-rpm\)](#);
- [Mageia, OpenMandriva Lx \(urpmi\)](#);
- [Red Hat Enterprise Linux, Fedora, CentOS \(yum, dnf\)](#);
- [SUSE Linux \(zypper\)](#).

Astra Linux, Debian, Mint, Ubuntu (apt)

1. The repository for these operating systems is protected with the digital signature of Doctor Web. To access the repository, import and add the digital signature key to the package manager storage by running the command:

```
# wget https://repo.drweb.com/drweb/drweb.gpg -O /etc/apt/trusted.gpg.d/drweb.gpg
```



The `apt-key` utility was used earlier to install the digital signature key from Doctor Web. This utility is deprecated and not recommended for usage. Furthermore, OS developers recommend using the `/etc/apt/trusted.gpg.d` directory instead of the `/etc/apt/trusted.gpg` file. For this reason, when you install Dr.Web Industrial for Linux from the repository, if the signature key is installed to the `/etc/apt/trusted.gpg` directory, the `apt-get update` command (see below) displays the following warning: `Key is stored in legacy trusted.gpg keyring (/etc/apt/trusted.gpg), see the DEPRECATION section in apt-key(8)` for details. At that, the installation of Dr.Web Industrial for Linux continues as usual and the product functionality is not affected. To avoid this warning while installing or reinstalling Doctor Web products, install the signature key as indicated above.

2. To add the repository, run the command:

```
# echo "deb https://repo.drweb.com/drweb/debian 11.1 non-free" > /etc/apt/sources.list.d/drweb.list
```



You can complete steps 1 and 2 by downloading and installing a dedicated [DEB package](#) .

3. To install Dr.Web Industrial for Linux from the repository, run the commands:

```
# apt-get update
# apt-get install drweb-industrial-workstations
```



You can also use alternative package managers (for example, Synaptic or aptitude) to install the product. Furthermore, it is recommended to use alternative managers, such as aptitude, to solve a package conflict if it occurs.

ALT (apt-rpm)

1. To add the repository, add the following line to the file `/etc/apt/sources.list.d/drweb-apt-rpm-<arch>.list`:

```
rpm http://repo.drweb.com/drweb/altlinux 11.1/<arch> drweb
```

where `<arch>` represents the package architecture in use:

- for the 32-bit version: `i386`;
 - for the AMD64 architecture: `x86_64`;
 - for the ARM64 architecture: `aarch64`;
 - for the E2K architecture: `e2s`;
 - for the IBM POWER (ppc64el) architecture: `ppc64le`.
2. Prior to installing Dr.Web Industrial for Linux on a computer of the E2K architecture running ALT, add the following lines to the `/etc/rpmrc` file:

```
arch_compat: e2kv4: e2s  
arch_compat: e2k: e2s  
arch_compat: e2s: noarch
```

3. To install Dr.Web Industrial for Linux from the repository, run the commands:

```
# apt-get update  
# apt-get install drweb-industrial-workstations
```

You can also use alternative package managers (for example, Synaptic or aptitude) to install the product.

Mageia, OpenMandriva Lx (urpmi)

1. Add the repository by running the command:

```
# urpmi.addmedia drweb https://repo.drweb.com/drweb/linux/11.1/<arch>/
```

where `<arch>` represents the package architecture in use:

- for the 32-bit version: `i386`;
 - for the 64-bit version: `x86_64`.
2. To install Dr.Web Industrial for Linux from the repository, run the command:

```
# urpmi drweb-industrial-workstations
```

You can also use alternative package managers (for example, rpmdrake) to install the product.



Red Hat Enterprise Linux, Fedora, CentOS (yum, dnf)

1. Add the `drweb.repo` file with the content provided below to the `/etc/yum.repos.d` directory:

```
[drweb]
name=DrWeb - 11.1
baseurl=https://repo.drweb.com/drweb/linux/11.1/$basearch/
gpgcheck=1
enabled=1
gpgkey=https://repo.drweb.com/drweb/drweb.key
```



If you plan to write the contents indicated above to a file by using such commands as `echo` with redirecting of an output, the `$` character must be escaped: `\$`.

You can complete step 1 by downloading and installing a dedicated [RPM package](#)

2. To install Dr.Web Industrial for Linux from the repository, run the command:

```
# yum install drweb-industrial-workstations
```

On Fedora 22 and later, it is recommended to use the `dnf` manager instead of the `yum` manager, for example:

```
# dnf install drweb-industrial-workstations
```

You can also use alternative package managers (for example, PackageKit or Yumex) to install the product.

SUSE Linux (zypper)

1. To add the repository, run the command:

```
# zypper ar https://repo.drweb.com/drweb/linux/11.1/\$basearch/ drweb
```

2. To install Dr.Web Industrial for Linux from the repository, run the commands:

```
# zypper refresh
# zypper install drweb-industrial-workstations
```

You can also use alternative package managers (for example, YaST) to install the product.



6.2. Upgrading Dr.Web Industrial for Linux

Dr.Web Industrial for Linux has two update modes:

1. [Getting current updates](#) for packages and components of the up-to-date Dr.Web Industrial for Linux version (usually such updates comprise bug fixes and minor improvements in component operation).
2. [Upgrading to a newer version](#). This updating method is used if Doctor Web has released a new version of Dr.Web Industrial for Linux with new features.



Dr.Web Industrial for Linux allows to [update virus databases and the anti-virus engine](#) even if the protected server does not have access to the internet.

6.2.1. Getting Current Updates

After the installation of Dr.Web Industrial for Linux using any method described in the [corresponding section](#), the package manager automatically connects to the Dr.Web [package repository](#):

- If installation was performed from a [universal package](#) (a `.run` file) and the system uses DEB packages (for example, Astra Linux, Debian, Mint or Ubuntu), a separate version of the `zypper` package manager is used for operation with Dr.Web packages. It is automatically installed during Dr.Web Industrial for Linux installation.

To get and install updated Dr.Web packages with this manager, go to the directory `/opt/drweb.com/bin` and run the commands:

```
# ./zypper refresh
# ./zypper update
```

- In all other cases use updating commands of the package manager of your OS, for example:
 - on Red Hat Enterprise Linux or CentOS, use the `yum` command;
 - on Fedora, use the `yum` or `dnf` command;
 - on SUSE Linux, use the `zypper` command;
 - on Mageia or OpenMandriva Lx, use the `urpmi` command;
 - on ALT, Astra Linux, Debian, Mint or Ubuntu, use the `apt-get` command.

You can also use alternative package managers developed for your operating system. If necessary, refer to the reference guide for your package manager.

If a new Dr.Web Industrial for Linux version is released, packages with its components are put into the section of the Dr.Web repository corresponding to the new product version. In this case, updating requires switching the package manager to the new Dr.Web repository section (refer to [Upgrading to a Newer Version](#)).



6.2.2. Upgrading to a Newer Version

In this section

- [Introductory remarks](#)
- [Upgrading previous versions](#)
 - [Upgrading by installing a universal package](#)
 - [Upgrading from the repository](#)
 - [Key file transfer](#)
 - [Restoring connection to a centralized protection server](#)
 - [Aspects of the upgrading procedure](#)

Introductory remarks

The upgrade procedure for Dr.Web Industrial for Linux of earlier versions to a newer version is supported. Migrate to the newer version of Dr.Web Industrial for Linux in the same way the earlier version of Dr.Web Industrial for Linux was installed:

- If the current Dr.Web Industrial for Linux version was installed from the repository, an upgrade requires updating program packages from the repository.
- If the current Dr.Web Industrial for Linux version was installed from the universal package, to upgrade the product, you need to install another universal package that contains a newer version.



To determine how the version of Dr.Web Industrial for Linux to be updated was installed, check whether the Dr.Web Industrial for Linux executable directory contains the `uninst.sh` program uninstallation script. If so, the current version of Dr.Web Industrial for Linux was installed from the universal package; otherwise, it was installed from the repository.

If you cannot update Dr.Web Industrial for Linux the same way you installed it initially, uninstall your current version, and then install a new version using any convenient method. Installation and uninstallation procedures for previous versions of Dr.Web Industrial for Linux are the same as [installation](#) and [uninstallation](#) methods described in the current manual. For additional information, refer to the User manual for your current version of Dr.Web Industrial for Linux.

If the version of Dr.Web Industrial for Linux to be updated is controlled by a [centralized protection](#) server, it is recommended that you save the address of this server. For example, to determine the address of the centralized protection server to which Dr.Web Industrial for Linux is connected, run the [command](#):

```
$ drweb-ctl appinfo
```

In the output provided by this command, from the line like

```
ESAgent; <PID>; RUNNING 1; Connected <address>, on-line
```



save the `<address>` part (which can look like `tcp://<IP address>:<port>`, for example, `tcp://10.20.30.40:1234`). In addition, it is recommended that you save the server certificate file.

In case of any difficulties with finding out the parameters of the current connection, refer to the Administrator Manual for the installed version of Dr.Web Industrial for Linux and to the administrator of your anti-virus network.

Upgrading previous versions

Upgrading by installing a universal package

Install the new version of Dr.Web Industrial for Linux from the [universal package](#). If necessary, during the installation you will be prompted to automatically uninstall installed components of the older version of Dr.Web Industrial for Linux.

Upgrading from the repository

To upgrade your current version of Dr.Web Industrial for Linux installed from the repository of Doctor Web

Depending on the type of packages in use, do the following:

- **In case of using RPM packages (yum, dnf):**

1. Change the repository in use (switch from the package repository of your current version to the package repository of the new version).



You can find the name of the repository storing the packages of the new version in the [Installing from the Repository](#) section. For details on how to switch between repositories, refer to help guides of your distribution.

2. Install the new version of Dr.Web Industrial for Linux from the repository by running the command:

```
# yum update
```

or, if the dnf manager is used (such as on Fedora 22 and later):

```
# dnf update
```



If an error has occurred while updating the packages, uninstall and reinstall Dr.Web Industrial for Linux. If necessary, see sections [Uninstallation of Dr.Web Industrial for Linux](#) [Installed from the Repository](#) and [Installing from the Repository](#) (paragraphs related to your OS and package manager).

- **In case of using DEB packages (apt-get):**



1. Change the repository in use (switch from the package repository of your current version to the package repository of the new version).
2. Update the packages of Dr.Web Industrial for Linux by running the commands:

```
# apt-get update  
# apt-get dist-upgrade
```

Key file transfer

Regardless of the selected method to upgrade Dr.Web Industrial for Linux, your current license [key file](#) will be automatically transferred to a proper location required by the new version of Dr.Web Industrial for Linux.



If any issue occurs during automatic installation of the key file, you can [install it manually](#). The license key file of Dr.Web Industrial for Linux is stored in the directory `/etc/opt/drweb.com/`. If the valid license key file is lost, contact the Doctor Web [technical support](#).

Restoring connection to a centralized protection server

If possible, your connection to a centralized protection server will be restored automatically after the upgrade (if the version to be upgraded was connected to the centralized protection server). In case the connection has not been automatically restored, to reestablish the connection of the upgraded version of Dr.Web Industrial for Linux to the anti-virus network, use one of the following methods:

- Select the check box on the **Mode** [tab](#) of the Dr.Web Industrial for Linux [settings window](#).
- Run the [command](#):

```
$ drweb-ctl esconnect <server address> --Certificate <path to server certificate file>
```

In case of any issues with the connection process, contact the administrator of your anti-virus network.

Aspects of the upgrading procedure

If your current version of Dr.Web Industrial for Linux is active while upgrading the product from the repository, after installing the packages of the newer version of Dr.Web Industrial for Linux, the processes of the earlier version of Dr.Web Industrial for Linux remain running until the user logs off the system. At that, if Dr.Web Industrial for Linux is operating in graphical mode, the [icon](#) of the earlier version can be displayed in the notification area.



6.3. Uninstalling Dr.Web Industrial for Linux

Depending on the method that you used to install Dr.Web Industrial for Linux, you can uninstall the product using one of two methods:

- [start the uninstaller](#) to uninstall the universal package in command-line mode;
- [uninstall the packages](#) installed from the Doctor Web repository using a system package manager.

6.3.1. Uninstalling the Universal Package

Dr.Web Industrial for Linux that was installed from the [universal package](#) can be uninstalled from the command line (if you are using a graphical desktop environment, you will need a terminal emulator).



The uninstaller uninstalls not only Dr.Web Industrial for Linux, but also *all other* Dr.Web products installed on your computer.

If any other Dr.Web products, besides Dr.Web Industrial for Linux, are installed on your computer, follow a custom [component installation and uninstallation](#) procedure to uninstall Dr.Web Industrial for Linux only instead of starting the uninstaller.

Uninstalling Dr.Web Industrial for Linux from the command line

To run the uninstaller from the command line, run the command:

```
# /opt/drweb.com/bin/uninst.sh
```

The uninstallation procedure of Dr.Web Industrial for Linux is described in the [Uninstalling from the Command Line](#) section.

To start the uninstaller in silent mode without displaying the user interface (including uninstaller dialogs in command-line mode), run the command:

```
# env DRWEB_NON_INTERACTIVE=yes /opt/drweb.com/bin/uninst.sh
```



On ALT 8 SP and OSes using outdated versions of the package manager, you may see the following messages in the process of uninstalling:

```
/etc/init.d/drweb-configd: No such file or directory
```

These messages do not affect the system functioning. The uninstallation procedure is being performed correctly.



6.3.1.1. Uninstalling from the Command Line

Once the command-line uninstaller runs, a prompt to uninstall the product is displayed on the command line.

1. To start uninstallation, enter `Yes` or `Y` in response to the “Do you want to continue?” request. To cancel uninstalling Dr.Web products from your computer, enter `No` or `N`. In this case, the uninstaller will exit.

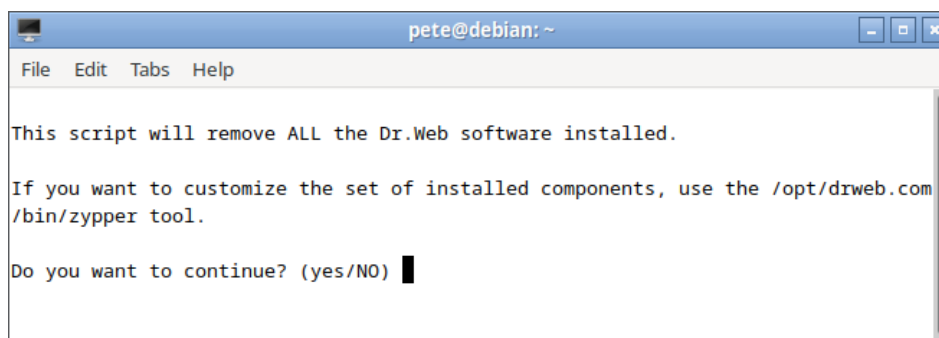


Figure 2. Prompt to uninstall the product

2. An automatic uninstallation procedure of all installed Dr.Web packages will run after you confirm it. During this procedure, the information about the uninstallation progress will be displayed and logged.
3. Once the process is completed, the uninstaller will exit automatically.

6.3.2. Uninstallation of Dr.Web Industrial for Linux Installed from the Repository

Steps below are for the following OSes (package managers):

- [Astra Linux, Debian, Mint, Ubuntu \(apt\)](#);
- [ALT \(apt-rpm\)](#);
- [Mageia, OpenMandriva Lx \(urpme\)](#);
- [Red Hat Enterprise Linux, Fedora, CentOS \(yum, dnf\)](#);
- [SUSE Linux \(zypper\)](#).



All commands mentioned below for package uninstallation require superuser (usually the *root* user) privileges. To elevate your privileges, use the `su` command (to change the current user) or the `sudo` command (to run a command as another user).

Astra Linux, Debian, Mint, Ubuntu (apt)

To uninstall the root meta-package of Dr.Web Industrial for Linux, run the command:

```
# apt-get remove drweb-industrial-workstations
```



In this case, other packages that were automatically installed with the root meta-package to resolve its dependencies remain in the system.

To uninstall the root meta-package together with all dependencies, run the command:

```
# apt-get remove drweb-industrial-workstations --autoremove
```

In this case, all packages (not only those of Dr.Web Industrial for Linux) that were automatically installed to resolve dependencies of other packages but are no longer used are uninstalled.

If the root meta-package was already uninstalled, to automatically uninstall all unused packages, run the command:

```
# apt-get autoremove
```

You can also use alternative package managers (for example, Synaptic or aptitude) to uninstall Dr.Web Industrial for Linux packages.

ALT (apt-rpm)

To uninstall Dr.Web Industrial for Linux, use the commands for Debian and Ubuntu OSes (see [above](#)).

You can also use alternative package managers (for example, Synaptic or aptitude) to uninstall Dr.Web Industrial for Linux packages.



On ALT 8 SP, the following messages can be displayed in the console during uninstallation:

```
/etc/init.d/drweb-configd: No such file or directory
```

These messages do not affect the functioning of the system. The uninstallation procedure is being performed correctly.

Mageia, OpenMandriva Lx (urpme)

To uninstall the root meta-package of Dr.Web Industrial for Linux, run the command:

```
# urpme drweb-industrial-workstations
```

In this case, other packages that were automatically installed with the root meta-package to resolve its dependencies remain in the system.

To uninstall the root meta-package together with all dependencies, run the command:

```
# urpme --auto-orphans drweb-industrial-workstations
```



In this case, all packages (not only those of Dr.Web Industrial for Linux) that were automatically installed to resolve dependencies of other packages but are no longer used are uninstalled.

You can also use alternative package managers (for example, `rpmdrake`) to uninstall Dr.Web Industrial for Linux packages.

Red Hat Enterprise Linux, Fedora, CentOS (yum, dnf)

To uninstall all installed Dr.Web packages, run the command (the `*` character must be escaped on some OSes: `\*`):

```
# yum remove drweb*
```

On Fedora 22 and later, it is recommended to use the `dnf` manager instead of the `yum` manager, for example:

```
# dnf remove drweb*
```



These commands uninstall all packages that name starts with `drweb` (the standard name prefix of Dr.Web products). All packages with this prefix will be uninstalled, not only those of Dr.Web Industrial for Linux.

You can also use alternative package managers (for example, PackageKit or Yumex) to uninstall Dr.Web Industrial for Linux packages.

SUSE Linux (zypper)

To uninstall the root meta-package of Dr.Web Industrial for Linux, run the command:

```
# zypper remove drweb-industrial-workstations
```

In this case, other packages that were automatically installed with the root meta-package to resolve its dependencies remain in the system.

To uninstall all installed Dr.Web packages, run the command (the `*` character must be escaped on some OSes: `\*`):

```
# zypper remove drweb*
```



This command uninstalls all packages whose name starts with `drweb` (the standard name prefix for Dr.Web products). All packages with this prefix will be uninstalled, not only those of Dr.Web Industrial for Linux.

You can also use alternative package managers (for example, YaST) to uninstall Dr.Web Industrial for Linux packages.



6.4. Additional Information

6.4.1. Dr.Web Industrial for Linux Packages and Files

In this section

- [Packages](#)
- [Files](#)

Packages

Dr.Web Industrial for Linux consists of the following packages:

Package	Contents
<code>drweb-bases</code>	Virus database files
<code>drweb-boost</code>	Boost libraries
<code>drweb-common</code>	The <code>drweb.ini</code> unified configuration file, main libraries, documentation, hierarchy of Dr.Web Industrial for Linux directories, and a tool for collecting information on product configuration and system environment. During the installation of this package, a user named <code>drweb</code> and a group named <code>drweb</code> are created
<code>drweb-configd</code>	Dr.Web ConfigD component files
<code>drweb-configure</code>	Files of an auxiliary tool for Dr.Web Industrial for Linux configuration
<code>drweb-ctl</code>	Dr.Web Ctl component files
<code>drweb-documentation</code>	Documentation files for Dr.Web for Unix products in the HTML format
<code>drweb-engine</code>	Dr.Web Virus-Finding Engine files
<code>drweb-esagent</code>	Dr.Web ES Agent component files
<code>drweb-filecheck</code>	Dr.Web File Checker component files
<code>drweb-industrial-workstations-doc</code>	Documentation in the PDF format
<code>drweb-industrial-workstations</code>	Root meta-package of Dr.Web Industrial for Linux
<code>drweb-icu</code>	Libraries for Unicode support and internationalization



Package	Contents
drweb-libs	Files of main libraries
drweb-netcheck	Dr.Web Network Checker component files
drweb-openssl	OpenSSL libraries
drweb-protobuf	Google Protobuf libraries
drweb-se	Dr.Web Scanning Engine component files
drweb-spider	SplDer Guard component files
drweb-update	Dr.Web Updater component files

The [Custom Installation and Uninstallation of Components](#) section describes typical sets of the components for custom installation that implement typical tasks of Dr.Web Industrial for Linux.

Files

Dr.Web Industrial for Linux files are stored in `/opt`, `/etc` and `/var` directories of the file system tree.

Structure of the directories in use:

Directory	Contents
<code>/etc/init.d/</code>	The <code>drweb-configd</code> management script for the Dr.Web ConfigD configuration management daemon
<code>/etc/opt/drweb.com/</code>	The <code>drweb.ini</code> configuration file and the <code>drweb32.key</code> key file. In addition, it contains:
<code>certs/</code>	– files of certificates in use.
<code>/opt/drweb.com/</code>	Main directory of Dr.Web Industrial for Linux. It contains:
<code>bin/</code>	– executable files of all components (except Dr.Web Virus-Finding Engine);
<code>include/</code>	– header files of libraries in use;
<code>lib/</code>	– libraries in use;
<code>man/</code>	– system help files: <code>man</code> ;
<code>share/</code>	– auxiliary product files, including:



Directory	Contents
doc/	▫ Dr.Web Industrial for Linux documentation (License Agreement and Administrator manual, if the documentation packages are installed),
drweb-bases/	▫ files of Dr.Web virus databases (original files supplied during installation),
scripts/	▫ auxiliary script files.
/var/opt/drweb.com/	Auxiliary and temporary files, including:
bases/	– files of Dr.Web virus databases (the relevant updated version);
cache/	– cache of updates;
drl/	– lists of update servers in use;
lib/	– Dr.Web Virus-Finding Engine as a dynamic-link library (drweb32.dll) and the settings for operation in the centralized protection mode distribution, is also stored here;
update/	– directory for temporarily storing updates during their download.

6.4.2. Custom Installation and Uninstallation of Components

In this section

- [Typical component sets for custom installation](#)
- [Installation and uninstallation of Dr.Web Industrial for Linux components installed from the repository](#)
- [Installation and uninstallation of Dr.Web Industrial for Linux components installed from the universal package](#)
 - [Unpacking the installation file](#)
 - [Custom installation of components](#)
 - [Custom uninstallation of components](#)

If necessary, you can choose to install or uninstall only certain Dr.Web Industrial for Linux components by installing or uninstalling the respective [packages](#). Perform custom installation or uninstallation the same way Dr.Web Industrial for Linux was installed.

To reinstall a component, you can uninstall it first and then install again.



Typical component sets for custom installation

If you need to install Dr.Web Industrial for Linux with limited functionality, you can install only component packages that provide the necessary functionality instead of installing a root meta-package from the [repository](#) or from the [universal package](#). The packages required to resolve dependencies will be automatically installed. The table below displays component sets designed to resolve typical Dr.Web Industrial for Linux tasks. The **Packages for Installation** column lists packages required for installation to obtain the specified component set.

Custom component set	Packages for installation	To be installed
Minimal set for console scanning	• <code>drweb-filecheck</code>, • <code>drweb-se</code>	• Dr.Web ConfigD, • Dr.Web Ctl, • Dr.Web File Checker, • Dr.Web Scanning Engine, • Dr.Web Updater, • Virus databases
Set for GNU/Linux file system monitoring	• <code>drweb-se</code>, • <code>drweb-spider</code>	• Dr.Web ConfigD, • Dr.Web Ctl, • Dr.Web File Checker, • Dr.Web Scanning Engine, • Dr.Web Updater, • SplDer Guard, • Virus databases

Installation and uninstallation of Dr.Web Industrial for Linux components installed from the repository

If Dr.Web Industrial for Linux is installed from a repository, to install or uninstall a component, use a respective command of the package manager of your OS, for example:

1. To remove the Dr.Web Network Checker component (the `drweb-netcheck` package) from Dr.Web Industrial for Linux installed on CentOS, run the command:

```
# yum remove drweb-netcheck
```

2. To add the Dr.Web Network Checker component (the `drweb-netcheck` package) to Dr.Web Industrial for Linux installed on Ubuntu, run the command:

```
# apt-get install drweb-netcheck
```

If necessary, use help on the package manager of your OS.



Installation and uninstallation of Dr.Web Industrial for Linux components installed from the universal package

If Dr.Web Industrial for Linux is installed from a universal package and you want to additionally install or reinstall a package of a component, you will need an installation file (with the `.run` extension) that was used to install Dr.Web Industrial for Linux. If you do not have this file anymore, download it from the Doctor Web company website.

Unpacking the installation file

When you start the `.run` file, you can specify the following command-line parameters:

`--noexec`—unpack Dr.Web Industrial for Linux installation files instead of starting the installation process;

`--keep`—do not delete Dr.Web Industrial for Linux installation files and the installation log after the installation;

`--target <directory>`—unpack Dr.Web Industrial for Linux installation files to the specified `<directory>`.

To get a full list of command-line parameters that can be used with the installation file, run the command:

```
$ ./<.run file name> --help
```

For custom installation of Dr.Web Industrial for Linux components, unpack the contents of the installation file. To do that, run the command:

```
$ ./<.run file name> --noexec --target <directory>
```

Custom installation of components

The `.run` installation file contains packages of all Dr.Web Industrial for Linux components (in the RPM format) and auxiliary files. Package files of each component are named as follows:

```
<component_name>_<version>~linux_<platform>.rpm
```

where `<version>` is a string that contains the version and date of a package release, and `<platform>` is a platform to run Dr.Web Industrial for Linux. Names of all Dr.Web Industrial for Linux component packages start with the `drweb` prefix.



The installation kit includes the `zypper` package manager intended for the installation of packages. For custom installation, use the `installpkg.sh` service script. To do that, firstly unpack the contents of the installation package to any writeable directory.



To install packages, superuser (usually the *root* user) privileges are required. To gain superuser privileges, use the `su` command to change the current user or the `sudo` command to run the specified command as another user.

To install a component package, go to the directory containing the unpacked installation file and run the command from the command line or from a terminal emulator:

```
# ./scripts/installpkg.sh <package_name>
```

For example:

```
# ./scripts/installpkg.sh drweb-netcheck
```

If it is necessary to install Dr.Web Industrial for Linux in full, start the installation script by running the command:

```
$ ./install.sh
```

Furthermore, you can install all Dr.Web Industrial for Linux packages (among other things, to install missing or accidentally removed components) by starting the installation of the root meta-package:

```
# ./scripts/installpkg.sh drweb-industrial-workstations
```

Custom uninstallation of components

If your OS uses RPM packages, to uninstall a package of a component, run the corresponding uninstallation command of the package manager of your OS:

- on Red Hat Enterprise Linux and CentOS, run the `yum remove <package_name>` command;
- on Fedora, run the `yum remove <package_name>` or `dnf remove <package_name>` command;
- on SUSE Linux, run the `zypper remove <package_name>` command;
- on Mageia or OpenMandriva Lx, run the `urpme <package_name>` command;
- on ALT, run the `apt-get remove <package_name>` command.

For example, on Red Hat Enterprise Linux:

```
# yum remove drweb-netcheck
```

If your OS uses DEB packages, or there is no package manager in your system, for the custom uninstallation, use the `zypper` package manager supplied with Dr.Web Industrial for Linux. To do that, go to the directory `/opt/drweb.com/bin` and run the command:

```
# ./zypper remove <package_name>
```



For example:

```
# ./zypper remove drweb-netcheck
```

If you want to uninstall Dr.Web Industrial for Linux, start the [uninstallation script](#) by running the command:

```
# ./uninst.sh
```

To reinstall a component, you can uninstall it first and then install again by starting custom or full installation.



6.5. Configuring Security Subsystems

Presence of the SELinux enhanced security subsystem in the OS as well as the use of mandatory access control systems, such as PARSEC—as opposed to the classical discretionary model used by Unix—causes issues in the operation of Dr.Web Industrial for Linux when its default settings are used. To ensure correct operation of Dr.Web Industrial for Linux in this case, it is necessary to make additional changes to the settings of the security subsystem and/or to the settings of Dr.Web Industrial for Linux.



Configuring the permissions of the PARSEC mandatory access control system for Dr.Web Industrial for Linux allows its components to bypass the restrictions of the set security policies and to get access to the files that belong to different privilege levels.

Even if you have not configured the permissions of the PARSEC mandatory access control system for Dr.Web Industrial for Linux, you still will be able to start file scanning via the [graphical management interface](#) of Dr.Web Industrial for Linux in [standalone instance](#) mode. For that, run the `drweb-gui` [command](#) with the `--Autonomous` parameter. You can also start the scanning directly from the [command line](#). To do this, run the `drweb-ctl` [command](#) with the same parameter (`--Autonomous`).

In standalone mode, it will be possible to scan files that require a level of privileges not higher than the level of the user who started the scanning session. This mode has the following aspects:

- To start in standalone instance mode, you will need a valid [key file](#), operation in [centralized protection](#) mode is not supported (it is possible to [install the key file](#) exported from a centralized protection server). In this case, even if Dr.Web Industrial for Linux is connected to the centralized protection server, the standalone instance *does not notify* the centralized protection server of the threats detected in standalone instance mode.
- All supplementary components that support the functioning of the standalone instance will be started on behalf of the current user and will work with a specifically generated configuration file.
- All temporary files and Unix sockets used for interaction of components are created only in a directory with an unique name. This directory is created by the started standalone instance in the directory for temporary files (specified by the `TMPDIR` environment variable).
- The standalone instance of the graphical management interface *does not start* the SplDer Guard monitor, only file scanning and quarantine management functions supported by Scanner are available.
- Paths to virus databases, anti-virus engine and executable files of service components are set to default values.
- The number of the standalone instances working simultaneously is not limited.
- When the standalone instance is shut down, the set of components maintaining it is also shut down.



6.5.1. Configuring SELinux Security Policies

In this section

- [Universal package installation issues](#)
- [Dr.Web Industrial for Linux operation issues](#)

If your GNU/Linux distribution features the SELinux (*Security-Enhanced Linux*) security subsystem, you may need to adjust SELinux security policies to enable correct operation of Dr.Web Industrial for Linux service components (such as the [scanning engine](#)) after their installation.

Universal package installation issues

If SELinux is enabled, the installation of the Dr.Web Industrial for Linux [universal package](#) from the installation file (`.run`) can fail because an attempt to create the *drweb* special user, as which Dr.Web Industrial for Linux components run, will be blocked.

If installation of Dr.Web Industrial for Linux from the installation file (`.run`) fails due to inability to create the *drweb* user, check the SELinux operation mode by running the `getenforce` command. The command outputs the current protection mode:

- **Enforcing**—protection is active and a restrictive strategy is used: actions that violate security policies are blocked and registered in the audit log;
- **Permissive**—protection is active but a permissive strategy is used: actions that violate the security policy are only registered in an audit log but not blocked;
- **Disabled**—SELinux is installed but not active.

If SELinux is operating in *Enforcing* mode, temporarily (during the installation of Dr.Web Industrial for Linux) change its mode to *Permissive*. For that purpose, run the command:

```
# setenforce 0
```

This command (until the next reboot) enables *Permissive* mode for SELinux.



Regardless of the operation mode enabled by running the `setenforce` command, after the restart of the operating system, SELinux returns to the safe operation mode specified in its settings (the file with SELinux settings is usually stored in the `/etc/selinux` directory).

After Dr.Web Industrial for Linux is successfully installed from the installation file, enable the *Enforcing* mode again before starting and activating the product. For that purpose, run the command:

```
# setenforce 1
```



Dr.Web Industrial for Linux operation issues

In certain cases when SELinux is running, several Dr.Web Industrial for Linux components (such as `drweb-se` and `drweb-filecheck`) cannot start, thereby hindering object scanning and file system monitoring. A failure to start these components causes the occurrence of [119](#) and [120](#) error messages on the main Dr.Web Industrial for Linux window and in the system log managed by the `syslog` service (this log is typically located in the `/var/log/` directory).

When the SELinux security system blocks access, such an event is also output to an audit system log. In general, when the audit daemon is used in the system, the audit log is stored in the `/var/log/audit/audit.log` file. Otherwise, messages about blocked operations are written to the general log file (`/var/log/messages` or `/var/log/syslog`).

If the scanning components of the product do not operate because they are blocked by SELinux, compile special *security policies* for them.



Certain GNU/Linux distributions do not feature the utilities mentioned below. If so, you may need to additionally install them.

To configure SELinux security policies

1. Create a new file with the SELinux policy source code (a `.te` file). This file defines restrictions related to the described module. The policy source code file can be created in one of the following ways:
 - 1) Using the `audit2allow` utility, which is the simplest method. The utility generates permissive rules from messages on access denial in system log files. You can set to search messages automatically or specify a path to the log file manually.



You can use this method only if Dr.Web Industrial for Linux components have violated SELinux security policies and these events have been registered in the audit system log. If not, wait for such an incident triggered by Dr.Web Industrial for Linux to occur or force-create permissive policies by using the `policygentool` utility (see below).

The `audit2allow` utility is contained either in the `policycoreutils-python` package or in the `policycoreutils-devel` package (for Red Hat Enterprise Linux, CentOS, Fedora operating systems, depending on the version) or in the `python-sepolgen` package (for Debian and Ubuntu operating systems).

Example of using `audit2allow`:

```
# grep drweb-se.real /var/log/audit/audit.log | audit2allow -M drweb-se
```

In the given example, the `audit2allow` utility performs a search in the `/var/log/audit/audit.log` file to find access denial messages for the `drweb-se` component.



The utility creates two files: the `drweb-se.te` policy source file and the `drweb-se.pp` policy module ready to install.

If no corresponding incidents are found in the system audit log, the utility returns an error message.

In most cases, you do not need to modify the policy file created by the `audit2allow` utility; thus, it is recommended to go to [step 4](#) for the installation of the `drweb-se.pp` policy module.



The `audit2allow` utility outputs the `semodule` command with all arguments. By copying it to the command line and running it, you complete [step 4](#). Go to [step 2](#) only if you want to modify the security policies that were automatically generated for Dr.Web Industrial for Linux components.

- 2) Using the `policygentool` utility. For that purpose, specify the name of the component that you want to be treated differently and the full path to its executable file.



The `policygentool` utility included in the `selinux-policy` package for Red Hat Enterprise Linux and CentOS may not operate correctly. If so, use the `audit2allow` utility.

Example of policy creation using `policygentool`:

- for the `drweb-se` component:

```
# policygentool drweb-se /opt/drweb.com/bin/drweb-se.real
```

- for the `drweb-filecheck` component:

```
# policygentool drweb-filecheck /opt/drweb.com/bin/drweb-filecheck.real
```

You will be prompted to specify several general properties for created the domain. After that, three files that determine the policy will be created (for each of the components):

`<module_name>.te`, `<module_name>.fc` and `<module_name>.if`.

2. If required, edit the generated policy source file `<module_name>.te`, then use the `checkmodule` utility to create a binary representation (a `.mod` file) of this source file of the local policy.



This command requires the `checkpolicy` package to be installed in the system.

Usage example:

```
# checkmodule -M -m -o drweb-se.mod drweb-se.te
```

3. Create a policy module for installation (a `.pp` file) with the help of the `semodule_package` utility.

Example:

```
# semodule_package -o drweb-se.pp -m drweb-se.mod
```

4. To install the created policy module, use the `semodule` utility.



Example:

```
# semodule -i drweb-se.pp
```

For details on SELinux operating principles and configuration, refer to documentation on your GNU/Linux distribution.

6.5.2. Configuring PARSEC Permissions

In this section

- [Customizing the interaction of components running at different privilege levels](#)
 - [Using the drweb-configure tool](#)
 - [Editing configuration files manually](#)
- [Customizing the automatic start of the components with user privileges](#)
 - [Using the drweb-configure tool](#)
 - [Editing PAM configuration files manually](#)
- [Configuring SplDer Guard to intercept file access events](#)

In GNU/Linux distributions having the PARSEC security subsystem, the access of all applications to files depends on their privilege level. Thus, SplDer Guard can intercept file access events by default to the extent allowed by its privilege level.

Moreover, if the user works at any privilege level other than the zero, the graphical interface of Dr.Web Industrial for Linux cannot interact with SplDer Guard and the anti-virus service components if they operate at different privilege levels; moreover, access to the consolidated [quarantine](#) may become unavailable.

If your OS uses PARSEC and there are accounts of users working at privilege levels other than zeroth, you need to customize Dr.Web Industrial for Linux to ensure that its components can interact while running at different privilege levels.



To perform these procedures, superuser (the *root* user) privileges are required. To gain superuser privileges, use the `su` command to change the current user or the `sudo` command to run the specified command as another user.

Customizing the interaction of components running at different privilege levels

The *privsock* mechanism is designed to enable the operation of system network services that do not process information using the mandatory context but interact with processes that operate in the mandatory context of an access subject. `drweb-configd` is the Dr.Web Industrial for Linux service component that is responsible for interaction of all anti-virus components among each other.



To grant the configuration management daemon of Dr.Web Industrial for Linux (`drweb-configd`) a privilege to use *privsock*, it is necessary to edit the `/etc/parsec/privsock.conf` system file. To change settings, we recommend that you use the `drweb-configure` configuration tool included in Dr.Web Industrial for Linux, or you can make manual changes to the required configuration files.

Using the `drweb-configure` tool

The required changes will be made automatically after running the command:

```
# drweb-configure session <mode>
```

where `<mode>` may have one of the following values:

- `enable`—use *privsock*;
- `disable`—do not use *privsock*.

Editing configuration files manually

For Astra Linux SE version 1.6 and later

1. Open the `/etc/parsec/privsock.conf` file in any text editor. Add the following lines to this file:

```
/opt/drweb.com/bin/drweb-configd  
/opt/drweb.com/bin/drweb-configd.real
```

2. Save the file and restart the operating system.

Customizing the automatic start of the components with user privileges

To make Dr.Web Industrial for Linux components with which the user interacts available in the user environment (when the user works at a privilege level other than zero), you need to make changes to the files containing PAM settings to ensure the automatic start of the required Dr.Web Industrial for Linux components at the beginning of the user session and their termination at the end of the session. The module (the custom `pam_drweb_session.so` PAM module by Doctor Web starts the `drweb-session` mediation component, which connects the components running in the user environment to the components operating with zero-level privileges and running automatically at the OS startup).

To change PAM settings, we recommend that you use the `drweb-configure` configuration tool included in Dr.Web Industrial for Linux; alternatively, you can edit the required configuration files manually.



Using the drweb-configure tool

To make configuring complex parameters of Dr.Web Industrial for Linux more convenient, we have developed a dedicated auxiliary tool `drweb-configure`.

1. To enable or disable the automated start of the required Dr.Web Industrial for Linux components in the environment of the user who has a privilege level other than zero, run the command:

```
# drweb-configure session <mode>
```

where `<mode>` may have one of the following values:

- `enable`—enable the automated start of the necessary components during the user session with user privileges.
- `disable`—disable the automated start of the required components during the user session with user privileges (this will render a number of Dr.Web Industrial for Linux functions unavailable).

2. Restart the operating system.



To use help on how to use `drweb-configure` for configuring PAM settings, run the command:

```
$ drweb-configure --help session
```

Editing PAM configuration files manually

For Astra Linux and other distributions using the `pam_parsec_mac.so` PAM module

1. To change PAM configuration, you need to edit all configuration files in the `/etc/pam.d` directory that call the `pam_parsec_mac.so` PAM module. To get the full list of such files, run the command:

```
# grep -R pam_parsec_mac.so /etc/pam.d
```

Add the following records of the `session` type to all files from the list:

- Above the first record of the `session` type:

```
session optional pam_drweb_session.so type=close
```

- After the last record of the `session` type:

```
session optional pam_drweb_session.so type=open
```

2. Save the changed files.
3. Create a symbolic link to the `pam_drweb_session.so` file from the system directory containing PAM modules. The `pam_drweb_session.so` file is located in the Dr.Web Industrial for Linux library directory `/opt/drweb.com/lib/` (for 64-bit operating systems, for instance, the path to the module is `/opt/drweb.com/lib/x86_64-linux-gnu/pam/`).
4. Restart the operating system.



Configuring SplDer Guard to intercept file access events

To give the SplDer Guard file monitor an ability to detect the attempts of accessing files, which have any level of access privileges, you need to switch SplDer Guard to the *Fanotify* operating mode.

To switch SplDer Guard to the *Fanotify* operating mode, run the [command](#):

```
# drweb-ctl cfset LinuxSpider.Mode Fanotify
```

To get additional information, run the command:

```
$ man drweb-spider
```

6.5.3. Configuring ALT 8 SP and Other Distributions Using `pam_namespace`

In this section

- [Using the `drweb-configure` tool](#)
- [Editing PAM configuration files manually](#)

To make Dr.Web Industrial for Linux components with which the user interacts available in the user environment, you need to make changes to the files containing PAM settings to ensure the automatic start of the required Dr.Web Industrial for Linux components at the beginning of the user session and their termination at the end of the session.



On ALT 8 SP, changes are required for all privilege levels, and on other OSes using `pam_namespace`—when the user works at a privilege level other than zero.

The custom `pam_drweb_session.so` PAM module developed by the Doctor Web company starts the `drweb-session` mediation component, which connects the local instances of components running in the user environment to the components operating with zero-level privileges and running automatically at OS startup.

To change PAM settings, we recommend that you use the `drweb-configure` configuration tool included in Dr.Web Industrial for Linux; alternatively, you can edit the required configuration files manually.



Perform the following actions before introducing changes on ALT 8 SP 11100-02:

1. Log in as *officer*.
2. Gain superuser rights:

```
$ su -
```

3. Install the policy:

```
# semodule -i /opt/drweb.com/share/drweb.pp
```

4. Update file security contexts on the basis of the installed policy:

```
# restorecon -r /opt/drweb.com
```

Using the drweb-configure tool

To make configuring complex parameters of Dr.Web Industrial for Linux more convenient, we have developed a dedicated auxiliary tool `drweb-configure`.

1. To enable or disable the automated start of the required Dr.Web Industrial for Linux components in the environment of the user who has a privilege level other than zero, run the command:

```
# drweb-configure session <mode>
```

where *<mode>* may have one of the following values:

- `enable`—enable the automated start of the necessary components during the user session with user privileges.
- `disable`—disable the automated start of the required components during the user session with user privileges (this will render a number of Dr.Web Industrial for Linux functions unavailable).

2. Restart the operating system.



To use help on how to use `drweb-configure` for configuring PAM settings, run the command:

```
$ drweb-configure --help session
```

Editing PAM configuration files manually

1. To change PAM configuration, you need to edit all configuration files in the `/etc/pam.d` directory that call the `pam_namespace.so` PAM module. To get the full list of such files, run the command:

```
# grep -R pam_namespace.so /etc/pam.d
```

Add the following records of the *session* type to all files from the list:

- Above the first record of the *session* type:

```
session optional pam_drweb_session.so type=close
```



- After the last record of the *session* type:

```
session optional pam_drweb_session.so type=open
```

2. Save the changed files.
3. Create a symbolic link to the `pam_drweb_session.so` file from the system directory containing PAM modules. The `pam_drweb_session.so` file is located in the Dr.Web Industrial for Linux library directory `/opt/drweb.com/lib/` (for 64-bit operating systems, for instance, the path to the module is `/opt/drweb.com/lib/x86_64-linux-gnu/pam/`). A command example for 64-bit ALT 8 SP OS:

```
# ln -s /opt/drweb.com/lib/x86_64-linux-gnu/pam/pam_drweb_session.so /lib64/security/pam_drweb_session.so
```



Perform the following additional actions on ALT 8 SP 11100-02 and ALT 8 SP 11100-03:

1. In the `/etc/pam.d/newrole` file, replace

```
session optional pam_drweb_session.so type=close
```

with the following:

```
session optional pam_drweb_session.so type=cleanup
```

2. Edit the `/etc/pam.d/su` and `/etc/pam.d/sudo` files by adding the following string to the end:

```
session optional pam_drweb_session.so type=close
```

3. Save the changed files.
4. Run the command:

```
# cp /opt/drweb.com/share/drweb-session/drweb-session.sh /etc/profile.d/
```

4. Restart the operating system.

6.5.4. Starting in CSE Mode (Astra Linux SE 1.6 and 1.7)

The Astra Linux SE OS supports a special *closed software environment* (CSE) mode. In this mode, applications can be started only if their executable files are signed with a digital signature of a developer whose public key is added to the OS list of trusted keys.

Starting with Astra Linux SE 1.6, the signing mechanism has been changed. You must configure Astra Linux SE 1.6 and 1.7 prior to starting Dr.Web Industrial for Linux in CSE mode.

To configure Astra Linux SE 1.6 and 1.7 to start Dr.Web Industrial for Linux in CSE mode

1. Install the `astra-digsig-oldkeys` package, if not installed, using an OS installation disk.
2. Add the public key of the Doctor Web company to the directory `/etc/digsig/keys/legacy/keys` (if the directory is absent, create it):

```
# cp /opt/drweb.com/share/doc/digsig.gost.gpg /etc/digsig/keys/legacy/keys
```

3. Run the command:

```
# update-initramfs -k all -u
```



4. Restart the operating system.



7. Getting Started

1. [Activate](#) Dr.Web Industrial for Linux.
2. [Ensure](#) its proper operation.
3. Set the [file monitoring mode](#).
4. Specify [exclusions](#), if any.

7.1. Registration and Activation

In this section

- [Purchasing and registering license](#)
- [Dr.Web Industrial for Linux activation](#)
 - [Obtaining demo license](#)
 - [Key file installation](#)
 - [Connecting to a centralized protection server](#)
- [Repeated registration](#)

Purchasing and registering license

After a license is purchased, updates to product components and virus databases can be regularly downloaded from Doctor Web update servers. Moreover, standard technical support provided by Doctor Web and its partners becomes available.

You can purchase any Dr.Web product as well as obtain a product serial number either from our [partners](#) or our [online store](#). For details on license options, visit the [official website](#) of the Doctor Web company.

License registration is required to prove that you are a legal user of Dr.Web Industrial for Linux and activate its anti-virus functions, including regular updates of virus databases. We recommend that you register the product and activate the license once the installation is completed.

Dr.Web Industrial for Linux activation

A license can be activated in one of the following ways:

- via the [Registration Wizard](#) included in License Manager;
- on the [official website](#) of the Doctor Web company.

To activate or renew the license, you need to enter the serial number. The serial number is supplied with Dr.Web Industrial for Linux or via email when purchasing or renewing the license online.



If you have several licenses for using Dr.Web Industrial for Linux on several computers, but choose to use Dr.Web Industrial for Linux only on one computer, you can specify this and, hence, all licenses will be combined and the license validity period will be automatically extended.

Obtaining demo license

A standard demo period is 1 month.

The Registration Wizard of License Manager opens upon the first Dr.Web Industrial for Linux startup (usually the Registration Wizard starts once the installation is complete). You can start registration from the License Manager window at any time by clicking **Get new license** on the [page](#) with information on the current license.



To activate a license using the serial number or request a demo license, a valid internet connection is required.

When a demo period or license is activated via License Manager, the [key file](#) (license or demo) is automatically generated on the local computer in its target directory. If you register on the website, the key file will be sent to you by email and you will need to [install](#) it manually.

Key file installation

If you have a key file corresponding to a valid license for the product (for example, you have obtained the key file from a vendor by email after registration or Dr.Web Industrial for Linux is being migrated to another computer), you can activate Dr.Web Industrial for Linux by specifying a path to the key file. You can do that as follows:

- In the [License Manager](#) by clicking **Other activation types** on the first step of the registration procedure and specifying a path to the key file or to the `.zip` archive with the key.
- Manually. For that:
 1. Unpack the key file if archived.
 2. Next, do one of the following.
 - Copy the key file to the directory `/etc/opt/drweb.com` and rename the file to `drweb32.key`.
 - In the Dr.Web Industrial for Linux [configuration file](#) specify the key file path as the `KeyPath` parameter value. In this case the key file name can be different from `drweb32.key`.
 3. Reload the Dr.Web Industrial for Linux configuration by running the [command](#):

```
# drweb-ctl reload
```

to apply changes.



Alternatively, run the [command](#):

```
# drweb-ctl cfset Root.KeyPath <path to key file>
```

In the latter case, it is not required to additionally reload the Dr.Web Industrial for Linux configuration. The key file will not be copied to the directory `/etc/opt/drweb.com` and will remain at its original location.



If the key file is not copied to the directory `/etc/opt/drweb.com`, the user becomes responsible for ensuring that the file is protected from corruption or deletion. This installation method is not recommended as the key file can be accidentally deleted (for example, if the directory, where the key file is located, is automatically cleaned up by the system). Remember that if a key file is lost, you can request a new one, but the number of such requests is limited.

Connecting to a centralized protection server

If the internet service provider or network administrator submits a [file with settings for connecting](#) to the centralized protection server, you can activate Dr.Web Industrial for Linux by specifying the file path. This can be done as follows:

- In the open program [settings window](#), go to the **Mode tab** and select the **Enable centralized protection mode** check box. On the drop-down list, select the **Load from file** item, specify the path to the connection settings file and click **Connect**.

Repeated registration

If a key file is lost but the license is not expired, you must register again by providing the personal data you specified during the first registration. You can use a different email address. In this case, the license key file will be sent at the new address.

A license key file can be obtained using the License Manager or the license management command a limited number of times. If that amount has been exceeded, you can confirm the registration of your serial number on the [website](#)  of the Doctor Web company to receive the key file. The key file is sent to the email that was specified during the first registration.

After the key file is delivered to you by email, you need to [install](#) it.

7.1.1. Key File

A key file, which is a special file stored on the local computer, corresponds to the purchased [license](#) or activated demo period for Dr.Web Industrial for Linux. The file regulates product usage rights in accordance with the purchased license or activated demo period.

The key file has `.key` extension and is valid if satisfies the following criteria:

- License or demo period is not expired.



- Demo period or license applies to all anti-virus components required by the product.
- Integrity of the key file is not violated.

If any of the conditions are violated, the license key file becomes invalid.



During Dr.Web Industrial for Linux operation, the key file must be located in the default directory `/etc/opt/drweb.com` under the name `drweb32.key`.

Components of Dr.Web Industrial for Linux regularly check whether the key file is available and valid. The key file is digitally signed to prevent its editing. So, the edited key file becomes invalid. It is not recommended to open your key file in text editors in order to avoid its accidental corruption.

If no valid key file (license or demo) is found, or if the license is expired, operation of the anti-virus components is blocked until a valid key file is installed.

It is recommended that you keep the license key file until it expires. In this case, there is no need to register the serial number again upon reinstalling Dr.Web Industrial for Linux or installing it on another computer, and you can use the license key file obtained during the initial registration process.



Dr.Web key files are usually packed in a `.zip` archive if sent via email. The archive with a key file to activate Dr.Web Industrial for Linux is usually named `agent.zip`. If there are several archives in the email message, you should use only `agent.zip`. In the Registration Wizard, you can specify the direct path to the archive without unpacking it. In addition, before installing the key file, you can unpack the archive using any suitable tool and extract the key file to any available directory (for example, to your home directory or to a USB flash drive).

7.1.2. Connection Settings File

The connection settings file is a special file that stores parameters that configure connection between Dr.Web Industrial for Linux and the [centralized protection](#) server. This file is supplied by the administrator of the anti-virus network or the internet service provider (if the latter provides support for the central anti-virus protection service).

You can use this file to activate Dr.Web Industrial for Linux when connecting it to the centralized protection server (in this case, you cannot use Dr.Web Industrial for Linux in the standalone mode without purchasing additional [license](#)).

7.2. Testing Product Operation

The *EICAR* (*European Institute for Computer Anti-Virus Research*) test helps testing operation of anti-virus programs that detect viruses using signatures. This test was designed specifically so that users could test reaction of an installed anti-virus to a threat without putting their computers at risk.



Although the *EICAR* test program is not actually malware, it is treated by the majority of anti-viruses as a virus. Dr.Web anti-virus products report the following upon detection of this “virus”: *EICAR Test File (NOT a Virus!)*. Other anti-viruses alert users in a similar way. The EICAR test program is a 68-byte `.com` file for MS-DOS/Windows that outputs the following message to the console or to a terminal emulator screen when running:

```
EICAR-STANDARD-ANTIVIRUS-TEST-FILE!
```

The test program body contains only text characters that form the following string:

```
X5O!P%@AP[4\PZX54(P^)7CC)7}$EICAR-STANDARD-ANTIVIRUS-TEST-FILE!$H+H*
```

If you create a text file consisting of the string provided above, the resulting file will be the “virus” program.

If Dr.Web Industrial for Linux operates correctly, this file must be detected during a file system scan regardless of the scan type and the user must be notified of the detected threat: EICAR Test File (NOT a Virus!).

An example of a command to test operation of Dr.Web Industrial for Linux using the EICAR test program:

```
$ echo 'X5O!P%@AP[4\PZX54(P^)7CC)7}$EICAR-STANDARD-ANTIVIRUS-TEST-FILE!$H+H*' > testfile && drweb-ctl scan testfile && rm testfile
```

This command writes the string that represents the body of the EICAR test program to a file named `testfile` created in the current directory, scans the resulting file and removes this file afterwards.



The abovementioned test requires write access to the current directory. In addition, make sure that it does not contain a file named `testfile` (if necessary, change the file name in the command).

If the test “virus” is detected, the following message is displayed:

```
<path to the current directory>/testfile - infected with EICAR Test File (NOT a Virus!)
```

If an error occurs during the test, refer to the [description of known errors](#).



If the SpIDer Guard file monitor is enabled, the file can be immediately deleted or quarantined upon detection of the threat (depending on component settings). In this case, after the threat notification is displayed, the `rm` command will inform that the file is missing, which implies that the monitor operates correctly.

7.3. File Monitoring Modes

In this section

- [General information](#)



- [Switching between file monitoring modes](#)

General information

The SpIDer Guard file system monitor, which controls access to files, may use three monitoring modes:

- *Regular* (set by default)—monitor file access operations (creating, opening, closing and starting). Scanning of a file, access to which has been allowed, is requested. If a threat is detected upon the scan, an action to neutralize the threat can be applied to the file. Applications are allowed to access the file until the file scanning is finished.
- *Enhanced control of executable files*—monitor files considered non-executable as in regular mode. SpIDer Guard blocks access to an executable file until its scanning is finished.



Executable files are binary files of PE and ELF formats, as well as script files containing the `#!` preamble.

- *"Paranoid" mode*—SpIDer Guard blocks access to any file until its scanning is finished.

Scanner stores file scan results in a specialized cache for a certain time, so reaccessing the same file does not lead to rescanning it if there is information in the cache; the result extracted from the cache is therefore used as the scan result. Despite this, the use of the "paranoid" monitoring mode leads to a significant slowdown in accessing files.

Switching between file monitoring modes



The modes for enhanced monitoring of files and pre-blocking are only available if SpIDer Guard operates in `FANOTIFY` mode and the OS kernel is built with the `CONFIG_FANOTIFY_ACCESS_PERMISSIONS` option enabled.

Switching between the SpIDer Guard monitoring modes is performed using the `cfset` [command](#) of the `drweb-ctl` [utility](#).

To switch between SpIDer Guard monitoring modes, superuser privileges are required. To gain superuser privileges, use the `su` command to change the current user or the `sudo` command to run the specified command as another user.

- To switch SpIDer Guard to the `FANOTIFY` mode, run the command:

```
# drweb-ctl cfset LinuxSpider.Mode FANOTIFY
```

- To change the monitoring mode, run the command:

```
# drweb-ctl cfset LinuxSpider.BlockBeforeScan <mode>
```

where `<mode>` defines the blocking mode:



- **Off**—access is not blocked, Spider Guard operates in regular (non-blocking) monitoring mode;
- **Executables**—access to executable files is blocked, Spider Guard performs enhanced monitoring of executable files;
- **All**—access to all files is blocked, Spider Guard monitors files in “paranoid” mode.
- To change an interval within which scan results cached by Scanner remain relevant, run the command:

```
# drweb-ctl cfset FileCheck.RescanInterval <interval>
```

where *<interval>* determines the interval during which cached scan results remain relevant. The acceptable value is from 0s to 1m. If you set the interval of less than 1 second, files are scanned upon any request.



8. Working with Dr.Web Industrial for Linux

A user can interact with Dr.Web Industrial for Linux both in graphical mode via the component that provides a graphical management interface and from the command line (including operation via terminal emulators in graphical mode).

- To start the graphical management interface of Dr.Web Industrial for Linux, select the **Dr.Web Industrial** item on the **Applications** or run the command in a terminal emulator:

```
$ drweb-gui &
```

After that, if a desktop environment is available, the graphical management interface of Dr.Web Industrial for Linux is started. To run scanning upon starting the graphical interface or to start its [standalone instance](#), run this command with [arguments](#).

- For details on how to manage Dr.Web Industrial for Linux, refer to the [Dr.Web Ctl](#) section.
- For graphic desktop environments, scanning can be started from a taskbar (such as Ubuntu Dock) and from a graphical file manager (such as Nautilus). Furthermore, the application status indicator appears in the notification area of the desktop, displays pop-up notifications and provides access to the application menu. The indicator is displayed as the notification agent, which, as well as all other service components, starts automatically and its operation does not require intervention. For details, refer to the [Integration with the Desktop Environment](#) section.
- For details on how to enable an enhanced file monitoring mode in SpIDer Guard, refer to the [File Monitoring Modes](#) section.



Regardless of the selected method to install Dr.Web Industrial for Linux, after the installation you need either to activate the license or install a key file if it has already been obtained, or connect Dr.Web Industrial for Linux to a centralized protection server (refer to the [Registration and Activation](#) section). Until you do that, *anti-virus protection is disabled*.



8.1. Operating in Graphical Mode

In this section

- [General information](#)
- [Notification agent](#)
- [Graphical management interface](#)
 - [Appearance of the graphical management interface](#)
 - [Main page](#)

General information

Two components are responsible for Dr.Web Industrial for Linux operation in the desktop environment:

- Notification agent—component that is automatically launched when the user session starts in the desktop environment. This component displays pop-up notifications on events in the Dr.Web Industrial for Linux operation, and also provides a status indicator of Dr.Web Industrial for Linux in the area of system notifications and the main menu for interaction with it.
- Graphical management interface—component that operates in the graphical desktop environment and provides a window interface to manage Dr.Web Industrial for Linux operation.

Notification agent

The Dr.Web Industrial for Linux notification agent is designed to:

- display the [status indicator](#) of Dr.Web Industrial for Linux;
- manage monitors and updating, start the graphical management interface;
- display pop-up notifications about events;
- start scanning according to a specified schedule.

Graphical management interface

The graphical management interface of Dr.Web Industrial for Linux allows to solve the following tasks:

1. View the status of Dr.Web Industrial for Linux operation, including relevance of virus databases and a period of license validity.
2. [Start and stop](#) the SpIDer Guard file system monitor.
3. Start on-demand [file scanning](#), including:
 - *Express scan* of system files and most vulnerable system objects.
 - *Full scan* of all system files.



- *Custom scan* of only specified files and directories or special objects (boot records and active processes).

You can select the files to be scanned by specifying target directories or files before scanning and by dragging and dropping them with the mouse from the window of a file manager to the main page (see below) or to the **Scanner** page of the Dr.Web Industrial for Linux window.

4. [View all threats](#) detected by Dr.Web Industrial for Linux during its current session in graphical mode, including viewing neutralized and skipped threats and quarantined objects.
5. [View quarantined objects](#) with a possibility of deleting or restoring them.
6. [Configuration of operation parameters](#) of the Dr.Web Industrial for Linux components, including the following parameters:
 - Actions that the Scanner and SpIDer Guard automatically apply to the detected threats (according to their type).
 - List of directories and files that are not scanned by the Scanner and are not controlled by the SpIDer Guard file system monitor.
 - Scheduled file system scanning, including its frequency and type, and a list of objects for custom scan according to a set schedule.
 - [Operation mode](#) (connecting to a centralized protection server or disconnecting from it).
7. License management (performed using [License Manager](#)).
8. [Viewing messages](#) on the anti-virus network status that are sent by the centralized protection server (only if Dr.Web Industrial for Linux operates in the anti-virus network and the anti-virus network administrator enables the corresponding setting on the centralized protection server).



The correct operation of Dr.Web Industrial for Linux requires that its service components are started in advance; otherwise, it finishes immediately after startup with the corresponding warning. In a normal operation mode, all necessary service components are started automatically and do not require user intervention.

Appearance of the graphical management interface

Appearance of the Dr.Web Industrial for Linux main window of the graphical management interface is shown in the figure below.

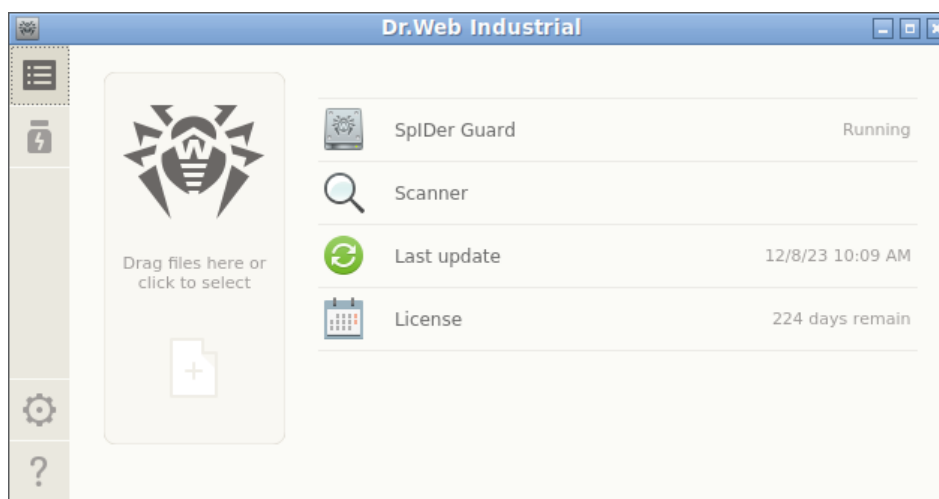


Figure 3. Dr.Web Industrial for Linux graphical management interface

The navigation panel is located in the left part of the window. The buttons of the navigation panel allow to perform the actions described below.

Button	Description
1. Continuously Enabled	
	Opens the main page where you can: • enable or disable the SpIDer Guard file system monitor; • start scanning of file system objects (files and boot records) and running processes; • check whether the virus databases are up-to-date and update them, if necessary; • start the License Manager to check the status of the current license and register a new one, if necessary.
	Opens the quarantine page, where you can view quarantined files and delete or restore them.
	Opens Dr.Web Industrial for Linux settings window, in particular, of: • scanner of file system objects; • SpIDer Guard file system monitor; • scheduled scanning. In addition, you can configure the settings of the centralized protection mode.
	Provides access to reference materials and supportive Doctor Web resources: • product information; • user manual; • Dr.Web forum; • technical support; • My Dr.Web personal user webpage.



Button	Description
	All links are opened in a browser installed on your system.
2. Conditionally Visible	
	Opens the page of the scanning task list, where you can find incomplete (running) scanning tasks. <i>It is displayed on the navigation panel only if at least one task is running.</i>
	Opens the page with the list of completed scans. The button changes its color depending on the scanning results:
	1) green—all scan tasks have been completed successfully; threats were not detected, or all detected threats have been neutralized;
	2) red—some of the detected threats have not been neutralized;
	3) yellow—at least one scanning task has failed. <i>It is displayed in the navigation pane only if at least one scanning task was started.</i>
	Opens the page with threats detected by the Scanner or by the SplDer Guard file system monitor. <i>It is displayed on the navigation panel only if at least one threat was detected.</i>
	It is displayed on the navigation panel only if the scanning start page is open and active. <i>When you go to any other page of the main window or scanning is started, the page to start scanning closes automatically, and the button is removed from the navigation panel.</i>
	It is displayed on the navigation panel only if the SplDer Guard control page is open and active. <i>When you go to any other page of the main window, the SplDer Guard control page closes automatically, and the button is removed from the navigation panel.</i>
	It is displayed on the navigation panel only if the update control page is open and active. <i>When you go to any other page of the main window, the update control page closes automatically, and the button is removed from the navigation pane.</i>
	It is displayed on the navigation panel only if the License Manager control page is open and active. <i>When you go to any other page of the main window, the License Manager control page closes automatically, and the button is removed from the navigation panel.</i>
	Opens the message view page from the centralized protection server.



Button	Description
	<i>It is displayed on the navigation panel only if Dr.Web Industrial for Linux operates in centralized protection mode and the anti-virus network administrator enables message sending to this workstation.</i>

Main page

On the main page of the Dr.Web Industrial for Linux graphical management interface, you can see the target pane where you can drag and drop files and directories to be scanned. The pane is marked with the **Drag files here or click to select** label. After objects are dragged and dropped from a file manager window to the Dr.Web Industrial for Linux main page, their [custom scanning](#) starts (if the Scanner is already scanning other objects, the new task of scanning specified files is [queued](#)).

Moreover, the main page of the window has the following buttons:

- **SpIDer Guard**—displays the current state of the SpIDer Guard file system monitor. Click the button to open the [control page](#), where you can start or stop SpIDer Guard and see its operation statistics.
- **Scanner**—allows to open the page where you can [start scanning](#) files, directories, and other objects of the file system (for example, boot records).
- **Last update**—displays the current status of virus databases. Click the button to open the [update control page](#), where you can start an updating process on demand.
- **License**—displays the status of the current license. Click this button to open the [License Manager](#) page, where you can find more detailed information on the current license as well as purchase and register a new license (if required).

8.1.1. Integration with the Desktop Environment

In this section

- [Status indicator in the notification area](#)
 - [Status indicator issues](#)
- [Context menu on the taskbar icon](#)
 - [Taskbar icon issues](#)
- [Starting a scan from the context menu of a file manager](#)
 - [Issues with using the context menu of a file manager](#)
- [Dragging and dropping files and directories to the window of the graphical management interface](#)



Dr.Web Industrial for Linux supports the following four methods of integration with a graphical desktop environment:

- displaying the [application status icon](#) in the desktop notification area thereby allowing you to open the application context menu;
- calling the [context menu](#) with basic file scanning commands when the user right-clicks the application icon in the taskbar;
- starting scanning selected files and directories using the context menu command of a [graphical file manager](#);
- starting scanning files and directories when the user [drags and drops](#) them on the main window of Dr.Web Industrial for Linux.

Status indicator in the notification area

After the user logs on, the notification agent displays the indicator in the form of the Dr.Web Industrial for Linux logo icon in the desktop notification area (if it is supported by your graphical environment). The indicator displays the application status and provides access to the Dr.Web Industrial for Linux menu. If any issue occurs (for example, the virus databases are outdated or the license is about to expire), the indicator displays an exclamation mark over the Dr.Web Industrial for Linux logo: .

In addition to the status indicator, the notification agent also displays pop-up notifications that inform the user of important events of Dr.Web Industrial for Linux operation, such as:

- detected threats (including those detected by the SpIDer Guard real-time monitor);
- license validity period is about to expire.

If you click this icon, the Dr.Web Industrial for Linux context menu opens:

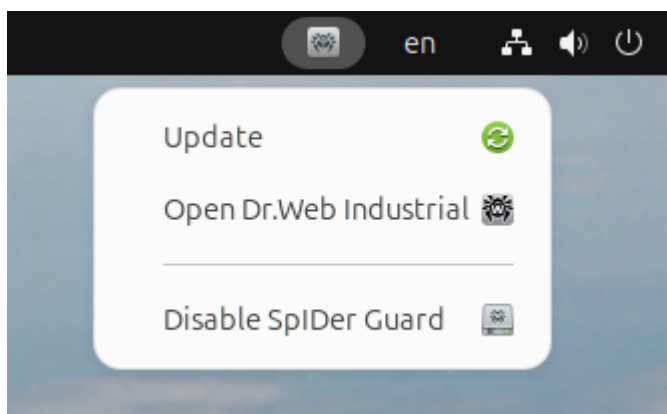


Figure 4. Dr.Web Industrial for Linux indicator context menu

When you select the **Open Dr.Web Industrial** item, the graphical interface management [window](#) of Dr.Web Industrial for Linux appears on the screen; that is, the application is [starting](#). Selection of the **Enable SpIDer Guard** or **Disable SpIDer Guard** menu items starts or stops operation of the monitor.



You need to authenticate as a user with administrative privileges to disable any monitor (refer to [Managing Application Privileges](#)).

Selection of the **Update** item forces an update procedure to start.

If the indicator notifies of issues in Dr.Web Industrial for Linux operation, the icon of the component that caused the issue is also provided with an exclamation mark, for example:

Status indicator issues

1. If the indicator displays a critical error mark and the drop-down list contains only the disabled **Loading** item, then Dr.Web Industrial for Linux cannot start because some service components are unavailable. If this status is permanent, try to [resolve](#) this error manually or contact our [technical support](#).
2. If the indicator is not displayed in the notification area after the user logged in, try to [resolve](#) this error manually or contact our [technical support](#).



In different desktop environments, appearance and behavior of the indicator can differ from the ones described above; for example, icons may not be displayed on the drop-down list.

Context menu on the taskbar icon

The application can be opened by selecting the **Dr.Web Industrial** item of the **Applications** menu. If the desktop environment contains a taskbar, the button with the application icon appears on the taskbar when Dr.Web Industrial for Linux is started. Right-clicking the button opens the application menu which may look as follows (the Ubuntu Dock panel menu):

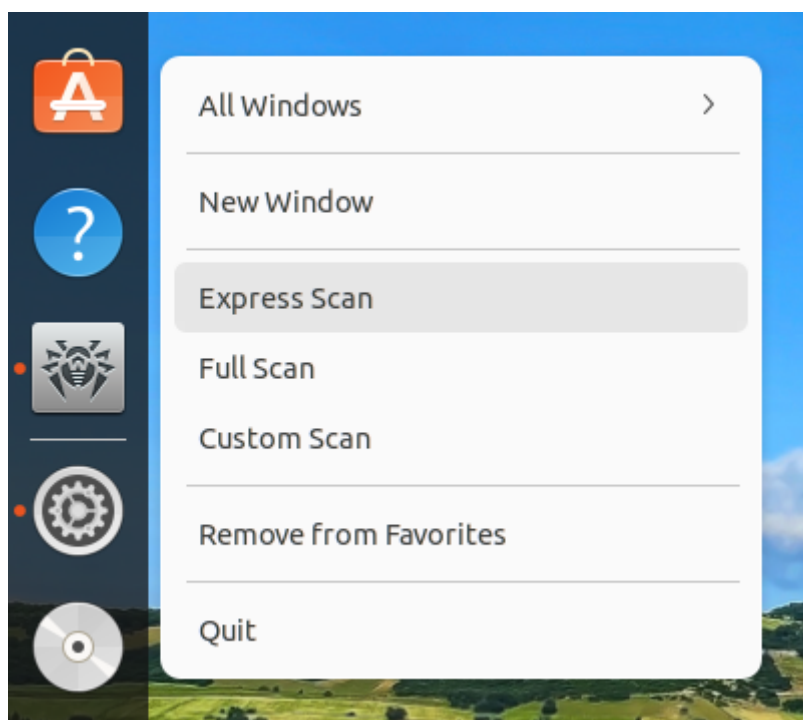


Figure 5. Dr.Web Industrial for Linux context menu on the taskbar

- Selection of the **Express scan** items, **Full scan** items and the **Custom scan** items allows you to start the corresponding [scan task](#) (for the **Custom scan** item it opens the page where you can select objects to be scanned).
- Selection of the **Dr.Web Industrial** menu item [starts](#) the graphical interface (if not started), while selection of the **Quit** item [terminates](#) it (if currently running).
- Selection of the **Lock to Launcher** item allows you to lock the application icon on the taskbar to quickly start the graphical interface and basic scan tasks.

In case there are running tasks for file system scanning in the [task queue](#), the indicator of the total execution of the active scanning tasks is displayed on the top of the application icon in the taskbar.



In different desktop environments, the taskbar as well as the context menu and behavior of the menu items (excluding **Express scan**, **Full scan** and **Custom scan**) may differ from the ones described above.

Taskbar icon issues

If the button with the application icon is displayed on the taskbar but the context menu does not contain items for starting of scan tasks, try to open the application via the **Dr.Web Industrial** item on **Applications** menu (instead of opening the application by running the `drweb-gui` command in a terminal emulator or selecting the **Open Dr.Web Industrial** item in the context menu of the [status indicator](#) in the notification area).



Starting a scan from the context menu of a file manager

Dr.Web Industrial for Linux allows you to scan files and directories directly from the window of a graphical file manager, such as Nautilus. To scan the files and directories:

1. Select them in the file manager window and then click right mouse button.
2. Select the **Open With Other Application** item in the appeared context menu.
3. Find and select Dr.Web Industrial for Linux item on the list of installed applications.

Usually, after the first use of Dr.Web Industrial for Linux for opening files, this association will be saved by the file manager, and the **Open With Dr.Web Industrial** item will be further available in the context menu.



In different graphic file managers, the item of the context menu as well as the way to choose an application for processing the selected files may differ from the ones described above.

Issues with using the context menu of a file manager

If Dr.Web Industrial for Linux is selected in a file manager using the **Open With Other Application** context menu item, some graphical environments for GNU/Linux can automatically create associations for files or directories (based on their MIME values) with Dr.Web Industrial for Linux. In this case, opening these files and directories in the file manager runs Dr.Web Industrial for Linux. To resolve this issue, [remove the created association](#).

Dragging and dropping files and directories to the window of the graphical management interface

Dr.Web Industrial for Linux allows you to start scanning of files and directories when you drag them from a file manager window using the mouse pointer and drop them on the Dr.Web Industrial for Linux window. To start scanning of dragged and dropped files and directories, it is necessary for the [main page](#) or page with [scan types](#) of the window to be opened. If a page of the Dr.Web Industrial for Linux window contains an area with the label **Drag files here or click to select**, this page supports dragging and dropping files and directories to be scanned.

8.1.2. Starting and Closing

Starting Dr.Web Industrial for Linux graphical management interface

To start the Dr.Web Industrial for Linux graphical management interface:

- select the **Dr.Web Industrial** item in the **Applications** system menu or



- right-click the Dr.Web Industrial for Linux [indicator](#) icon in the notification area and select **Open Dr.Web Industrial** from the drop-down list.

You can also start the Dr.Web Industrial for Linux graphical management interface from the [command line](#) by running the `drweb-gui&` command in a terminal emulator.

Closing Dr.Web Industrial for Linux graphical management interface

To close the Dr.Web Industrial for Linux graphical management interface, close the window using the standard close button on the title bar.



Service components, including the notification agent and the SpIDer Guard monitor, continue their operation after closing the Dr.Web Industrial for Linux graphical interface (unless they are disabled by the user).

Under normal operation, all necessary service components do not require user intervention.

8.1.3. Threat Detection and Neutralization

Threat detection and neutralization can be performed either by Scanner ([on user demand](#) or [on schedule](#)) or by the SpIDer Guard file system monitor.

- To enable or disable SpIDer Guard, use the [context menu](#) in the notification area or open the corresponding page with the monitor settings (refer to [File System Monitoring](#)).
- To view and manage Scanner current tasks for scanning file system objects, open the [task management](#) page.
- To view threats detected by Scanner or the SpIDer Guard file system monitor, open the [page with listed threats](#).
- To manage quarantined threats, open the [quarantine management](#) page.
- To configure the reaction of Dr.Web Industrial for Linux to detected threats, open the [settings window](#). On this window, you can also enable and adjust a [schedule](#) of periodic scanning.



If Dr.Web Industrial for Linux is controlled by a [centralized protection](#) server that does not allow the user to start scanning, the **Scanner page** of the Dr.Web Industrial for Linux window is disabled. Furthermore, in this case the notification agent and the graphical management interface do not start scheduled scanning.

8.1.3.1. Scanning on Demand

In this section



- [Scan types](#)
- [Starting a scan](#)
- [Editing the list of custom scan objects](#)
- [Starting a custom scan of listed objects](#)

Scan types

Scanner can start the following scan types on user demand:

- *Express scan*—scan a strictly defined set of critical system objects that are at high risk to be compromised (boot records, system files and so on).
- *Full scan*—scan all local file system objects available to the user on whose behalf Dr.Web Industrial for Linux was started.
- *Custom scan*—scan file system objects or some special-type objects directly specified by the user.



If Dr.Web Industrial for Linux operates in [centralized protection](#) mode and the centralized protection server does not allow the user to start file scanning, this page of the Dr.Web Industrial for Linux window is disabled.

Scanning increases processor load, which can cause the battery to discharge faster in case of running on mobile devices. Thus, it is recommended to perform a scan of a portable computer when it is plugged in.

Starting a scan

To start scanning of file system objects, click **Scanner** on the [main page](#) of the window.

The page with scan types opens. To start an *Express* or *Full* scan, click the corresponding button. After that, the scanning starts automatically.

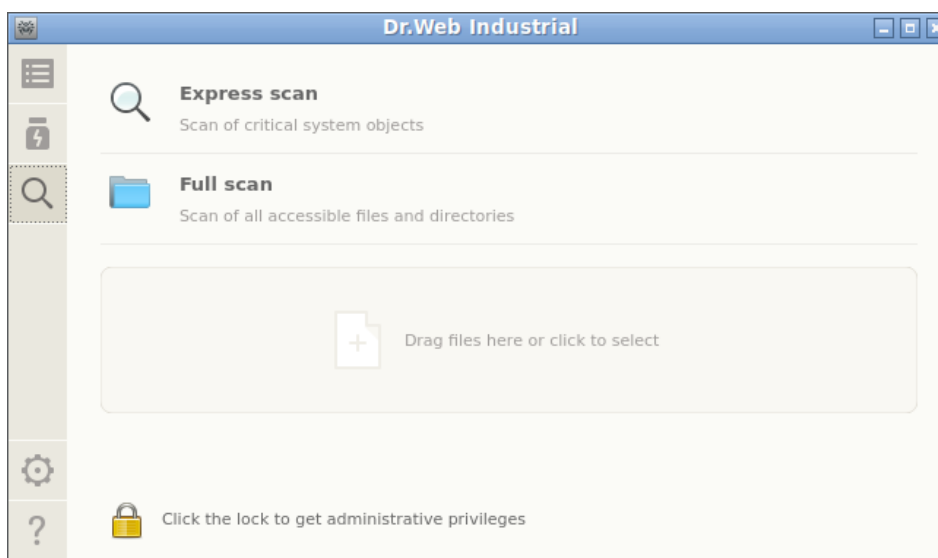


Figure 6. Selection of a scan type



Scanning of objects is always performed by Scanner with current application privileges. If the application does not have elevated privileges, all files and directories that are inaccessible to the user who started Dr.Web Industrial for Linux will be skipped. To enable scanning of all required files that are not owned by you, elevate the application privileges before scanning (refer to the [Managing Application Privileges](#) section).

To start the *Custom scan* of only required files and directories, do one of the following:

- **Drag and drop**

Open the page for selecting a scan type, drag the required files and directories using the mouse from a file manager window and drop them in the area marked with the **Drag files here or click to select** label. You can also drag the objects and drop them in the [main page](#) of the Dr.Web Industrial for Linux window.

When dragging files and directories to the window, it displays an area with the **Drop files here** label. To start scanning of the selected files, drop them in the page by releasing the mouse button. After that, the scanning will start automatically.

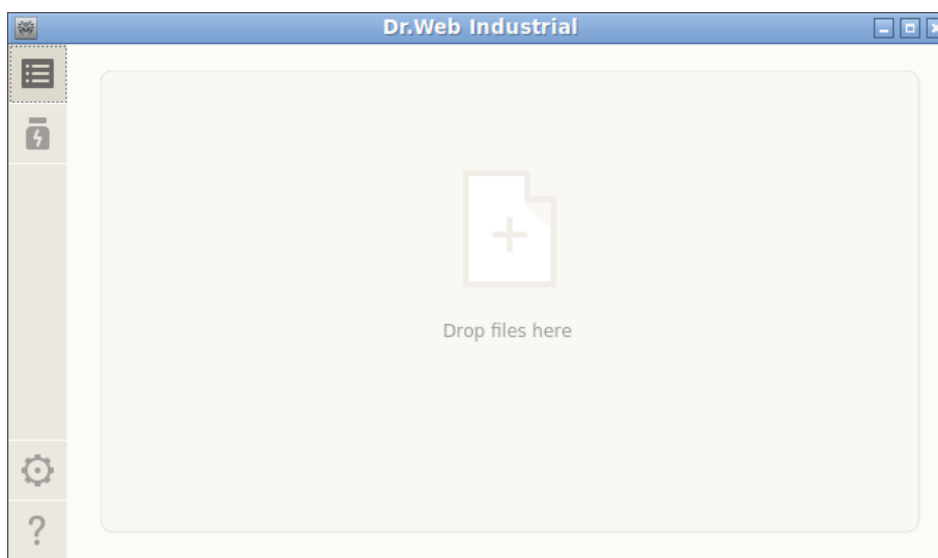


Figure 7. Area for adding files

- **Adding objects for the custom scan**

To select objects for the custom scan, click the area for adding files. A list of objects for the custom scan will be displayed on the screen.

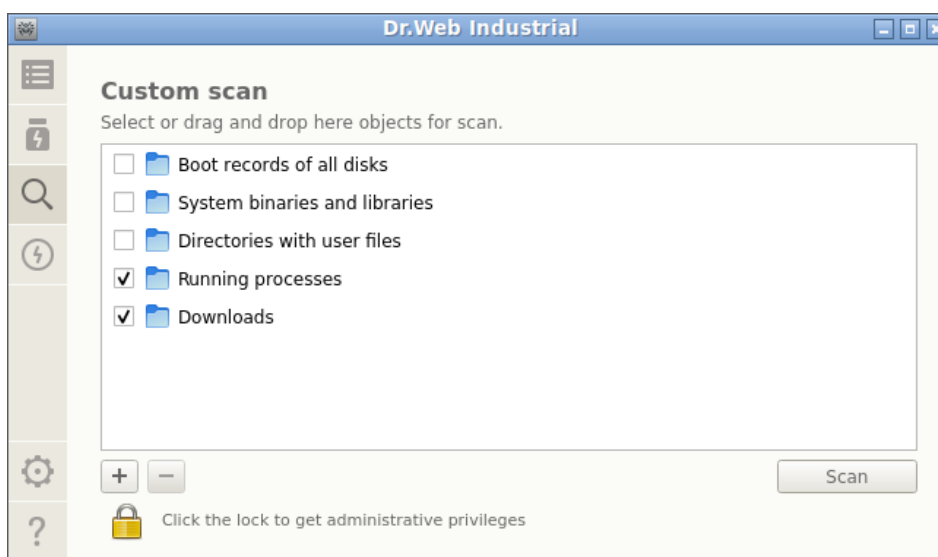


Figure 8. List of objects for the custom scan

The list contains four special items denoting predefined groups of objects:

- *Boot records of all disks*—all boot records of all available disks.
- *System binaries and libraries*—all directories with system executable files (`/bin`, `/sbin` and so on).
- *Directories with user files*—directories with user files and files of the current session (the `/home/<username>` home directory (`~`), `/tmp`, `/var/mail`, `/var/tmp`).
- *Running processes*—executable files that started currently running processes. At that, if a threat is detected in an executable file, all processes started with it are forcibly terminated and the threat is neutralized.



Editing the list of custom scan objects

If required, you can add custom paths to the list of the objects to be scanned. For that purpose, drag and drop required objects (paths to the objects are automatically added to the list) or click **+** below the list. After that, a standard dialog window opens, where you can select files and directories. Select a required object (a file or a directory) and click **Open**.

Click **–** below the list to remove all selected paths from the list (a path is selected if the list item containing this path is selected). To choose several paths, select items in the list and hold SHIFT or CTRL.



Hidden files and directories are not displayed in the file chooser by default. To view such objects, click  on the toolbar of the file chooser.

The first four items in the list are predefined and cannot be removed.

Starting a custom scan of listed objects

To start a custom scan, select all check boxes for the objects to be scanned and click **Scan**. After that, the scanning starts.

After the scanning starts, the new task is added to the queue which contains all Scanner tasks of the current session: complete tasks, tasks in progress and pending tasks. You can view the list of tasks and manage them on the [scan task management](#) page.

8.1.3.2. Scheduled Object Scanning

In this section

- [Scan types](#)
- [Starting a scan](#)

Dr.Web Industrial for Linux can perform the automatic launch of scheduled scanning of the specified list of the file system objects according to the [indicated schedule](#).



If Dr.Web Industrial for Linux is operating under the server control in [centralized protection](#) mode and launch of scanning on demand is prohibited on the centralized protection server, this Dr.Web Industrial for Linux option is unavailable.



Scan types

According to schedule, it is possible to perform the following types of scanning:

- *Express scan*—scan critical system objects that are at high risk to be compromised (boot records, system files, and so on).
- *Full scan*—scan all local file system objects available to the user on whose behalf Dr.Web Industrial for Linux was started.
- *Custom scan*—scan file system objects or other special objects specified by the user.

Starting a scan

Scanning is started automatically according to the set schedule. Start of the scanning is performed by:

1. The graphical interface itself if it runs when the scanning starts.
2. The notification agent if the graphical interface is unavailable when the scanning starts.


When scheduled scanning starts, the graphical interface for management automatically starts (if it is not launched yet), the created task is added to the queue which contains all scanning tasks of the current session: complete tasks, tasks in progress, and pending tasks. You can view the list of tasks and manage them on the [scan task management](#) page.

8.1.3.3. Managing Scan Tasks

You can view the list of created tasks and tasks in progress on the special Dr.Web Industrial for Linux page. If at least one task is queued, a button that opens the page with the task list becomes visible in the [navigation pane](#). Depending on the status of the queued tasks, the button has one of the following icons:

	At least one of the tasks is not complete (an animation is used).
	All scanning tasks in the list are complete or stopped by the user; no threat is detected or all detected threats are successfully neutralized.
	All scanning tasks in the list are complete or stopped by the user; some of the detected threats are not neutralized.
	All scanning tasks in the list are complete or stopped by the user. Some of the tasks have failed.

Tasks are sorted by creation time (from the last to the first created task).

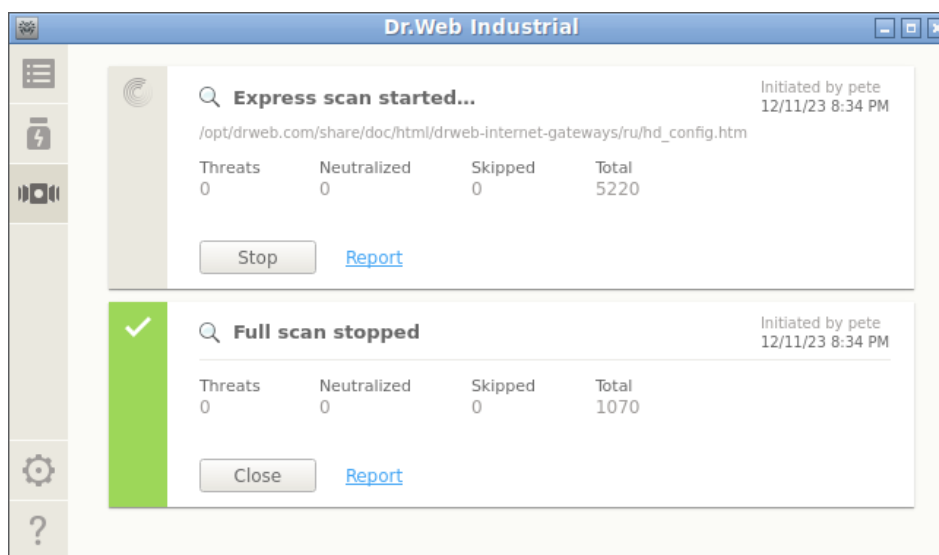**Figure 9. Task list**

For each listed task, the following information is available:

- scanning type (*Express scan*, *Full scan*, *Custom scan*, or *Scheduled scan*);
- name of the user who started scanning (if unknown, the system identifier of the user (*UID*) is displayed);
- date of task creation and completion (if complete);
- number of detected threats, neutralized threats, skipped files, and total number of scanned objects.

The status of the task is indicated with the color mark assigned to the listed task. The following colors are used:

	Scanning is not complete or is pending.
	Scanning is complete or stopped by the user; no threat is detected or all detected threats are neutralized.
	Scanning is stopped due to an error.
	Scanning is complete or stopped by the user; at least one detected threat is not neutralized.



The list contains only those scanning tasks performed by Scanner that were directly created by the user in the Dr.Web Industrial for Linux window, as well as scanning tasks that were started automatically according to the set schedule.

On the task description area, one of the following buttons is available:

- **Cancel**—cancel the pending task. The button is available if the task is pending. Once the button is clicked, the task completes. Information on the task remains in the list.



- **Stop**—stop the task which is in progress. After you click this button, the stopped task cannot be resumed. The button is available if the task is in progress. Information on the stopped task remains in the list.
- **Close**—close information on the complete task and delete the task from the list. The button is available if the task is not complete and if all detected threats are neutralized.
- **Neutralize**—neutralize threats. The button is available if the task is complete and some of the detected threats are not neutralized.
- **Details**—open the list with detected threats and neutralize them. The button is available if the task is complete and some of the detected threats are not neutralized.

Click the **Report** link to open a report window with scanning results including the detailed information about the task and the list of detected threats, if any.

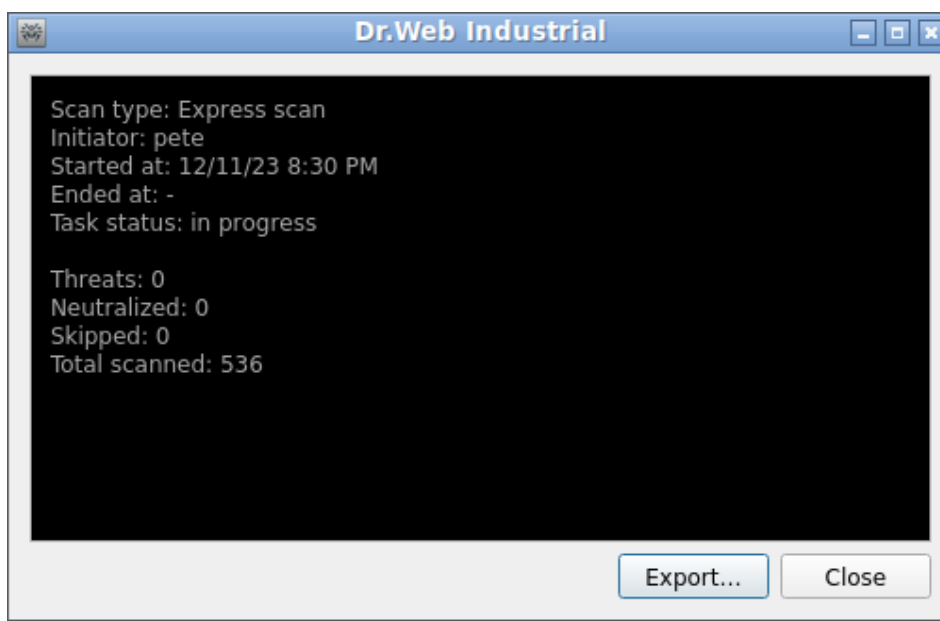


Figure 10. Detailed information on scanning results



File systems of Unix-like operating systems, such as GNU/Linux, can contain special objects that appear as named files but are not actual files containing data (for example, such objects are symbolic links, sockets, named pipes, and device files). They are called *special* files as opposed to *usual* (*regular*) ones. Dr.Web Industrial for Linux *always* skips special files during scanning.

If you click a link with the detected threat name, a default web browser opens a page with the information about the threat (the Doctor Web official website is displayed; an internet connection is required).

Click **Export** if you want to save the scanning report to a text file. To close the window with detailed scanning information, click **Close**.

To any threat detected by the Scanner during scanning of any type started in a graphical mode (including a scheduled scanning), Dr.Web Industrial for Linux applies [actions](#) that are specified in the settings on the **Scanner** [tab](#).



Threat neutralization settings specified on the **Scanner** tab are not used for *centralized scanning*.

To view all detected threats, open the [page with listed detected threats](#).

8.1.3.4. File System Monitoring

In this section

- [General information](#)
- [Managing operation of the file system monitor](#)
- [Configuring the file system monitor](#)
- [Issues with SplDer Guard operation](#)

General information

File system objects are continuously controlled by the SplDer Guard file system monitor.

The Dr.Web Industrial for Linux graphical management interface allows you to configure the operation of SplDer Guard, in particular to:

- start and stop the file system monitor;
- view component statistics and the list of detected threats;
- configure the following parameters of the file system monitor:
 - reaction to detected threats;
 - list of scanning exclusions.

Managing operation of the file system monitor

You can start and stop the SplDer Guard file system monitor and view statistics on its operation on a special page of Dr.Web Industrial for Linux. To access the page, click **SplDer Guard** on the [main page](#).

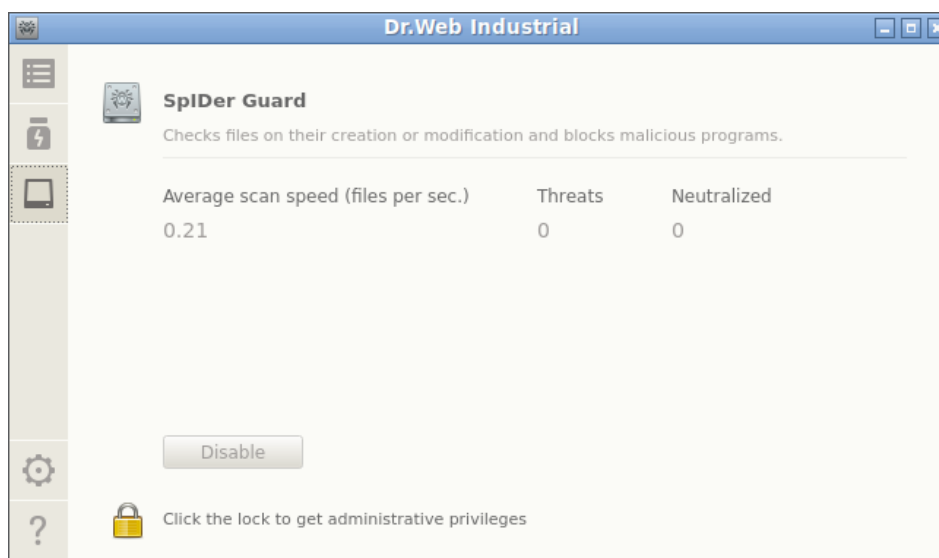


Figure 11. SpIDer Guard operation management

The following information is displayed on the page for monitoring management:

- status of the SpIDer Guard file system monitor (enabled or disabled) and details on an error if it occurred during component operation;
- file system monitoring statistics:
 - average file scanning speed;
 - number of detected and neutralized threats.

To enable monitoring, if disabled, click **Enable**. To disable monitoring, if enabled, click **Disable**.



To disable the file system monitor, the application must operate with elevated privileges, refer to the [Managing Application Privileges](#) section.

The option to enable and disable the SpIDer Guard file system monitor when Dr.Web Industrial for Linux is managed by a [centralized protection](#) server can be blocked if disabled by the server.

The SpIDer Guard status (enabled or disabled) is shown by the indicator:

	SpIDer Guard file system monitor is enabled and protecting the file system.
	SpIDer Guard file system monitor is not protecting the file system because either the user has disabled the component or an error has occurred.

To close the page, go to another page by using the buttons in the pane.

The list of threats detected by SpIDer Guard in the current Dr.Web Industrial for Linux session is displayed on the [detected threats view](#) page (available if at least one threat is detected).



Configuring the file system monitor

Configure the SplDer Guard file system monitor in the [settings window](#):

- on the **SplDer Guard** [tab](#), specify a reaction to detected threats;
- on the **Exclusions** [tab](#), specify objects to be excluded from monitoring.



For details on enabling the enhanced file monitoring mode for SplDer Guard, refer to the [File Monitoring Modes](#) section.

Issues with SplDer Guard operation

If an error occurs in operation of SplDer Guard, the management page displays an error message. To fix the error, refer to the description of known errors in [Appendix F](#).

8.1.3.5. Viewing Detected Threats

In this section

- [General information](#)
- [Neutralizing detected threats](#)
- [Viewing threat details](#)

General information

The list of threats detected by Scanner and the SplDer Guard file system monitor during the current Dr.Web Industrial for Linux session is displayed on a special window page which is available only if at least one threat was detected.



If threats were detected, click  in the navigation pane to open a page with a list of threats.

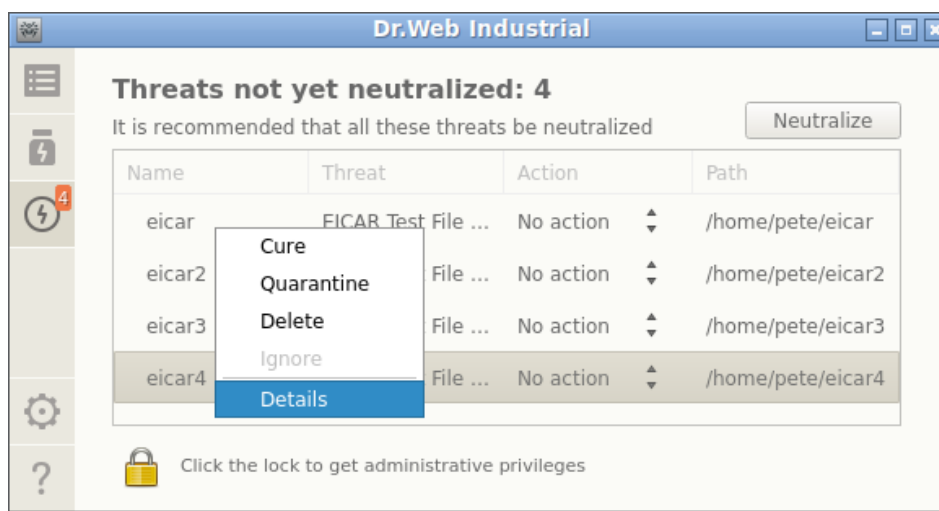


Figure 12. Viewing threats

The list provides the following information about each detected threat:

- a name of an object containing a threat;
- a name of the [threat](#) contained in the object as classified by the Doctor Web company;
- an [action](#) to be applied to the object for neutralizing the threat (or an action that was already applied, if the threat was neutralized);
- a path to the file system object in which this threat was detected.

Neutralized threats are displayed in the list as grayed out items.

Neutralizing detected threats

If some of the listed threats are not neutralized, the **Neutralize** button becomes available above the list. Once the button is clicked, an action specified in the corresponding **Action** field is applied to each threat that was not neutralized. If the threat is successfully neutralized, its row in the table becomes grayed out. If an attempt to neutralize the threat fails, the listed item is displayed in red and an error message appears in the **Action** field.

By default, an action to be applied to a threat is selected according to the settings of the component that detected the threat. You can adjust default actions applied to the threats detected by Scanner and the SpIDer Guard file system monitor on the corresponding tabs of the [settings window](#).



If the *Report* [action](#) was selected in [Scanner](#) or [SpIDer Guard](#) settings for a certain threat type, all threats of this type will be displayed with the *No action* action in the threat list. To neutralize such threats, indicate an action for each of them in the **Action** field.

If a threat is detected in a file inside a container (an archive, an email message and so on), the container is quarantined and not deleted.



If you need to apply an action different from the one specified in the settings, click the **Action** field in the row for the threat and select the required action from the context menu.

You can select several threats in the list at once. To do that, select them with the mouse while holding CTRL or SHIFT:

- When you hold CTRL, threats are selected one by one.
- When you hold SHIFT, threats are selected contiguously.

After selecting threats, you can apply some action to them by right-clicking the selection and then selecting the required action from the drop-down list. The selected action will be applied to all selected threats.



If a threat is detected in a compound object (an archive, an email message and so on), the selected action is applied to the container as a whole and not to the nested infected object.



The *Cure* action cannot be applied to some threat types.

If necessary, elevate [application privileges](#) to enable successful neutralization of threats.

The threats to which the *Ignore* action was applied will be displayed in the list until the graphical management interface is restarted.

Viewing threat details

To get the detailed information about any detected threat, right-click the corresponding row and select **Details** in the appeared context menu. This opens the window with the details on the threat and the object containing it. If you need to get details on several threats at once, select them with the mouse from the list while holding CTRL before opening the context menu.

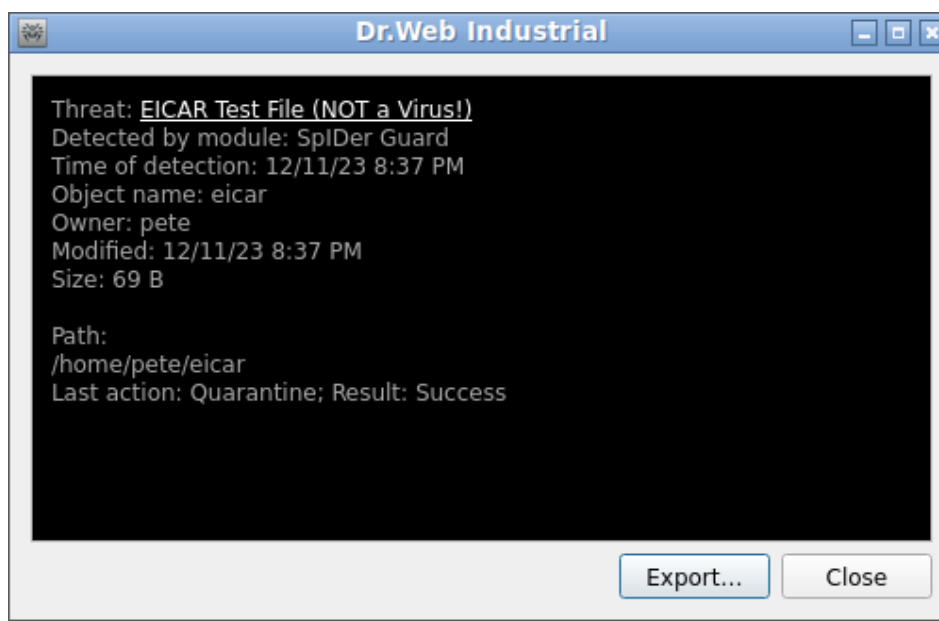


Figure 13. Threat details

This window displays the following information:

- a threat name as classified by the Doctor Web company;
- the Dr.Web Industrial for Linux component that detected the threat;
- the date and time of threat detection;
- the information about the file system object in which the threat was detected: its name, user/owner, last modified date and a path to the object in the file system;
- the last action applied to the threat and the result (if an option to apply actions automatically is enabled in the component settings, for example, you can set it for Scanner on the [corresponding tab](#) of the settings window).

Click the name of the threat to open a webpage with its description (the Doctor Web official website will be visited; an internet connection is required).

Click **Export** to save the information displayed in the window to a text file (the file chooser will open). To close the window with threat and object details, click **Close**.

8.1.3.6. Managing Quarantine

In this section

- [General information](#)
- [Applying actions to quarantined objects](#)
- [Viewing details on quarantined objects](#)

General information

The list of objects quarantined by Dr.Web Industrial for Linux is displayed on a special page. To

open this page, click  on the [navigation pane](#).

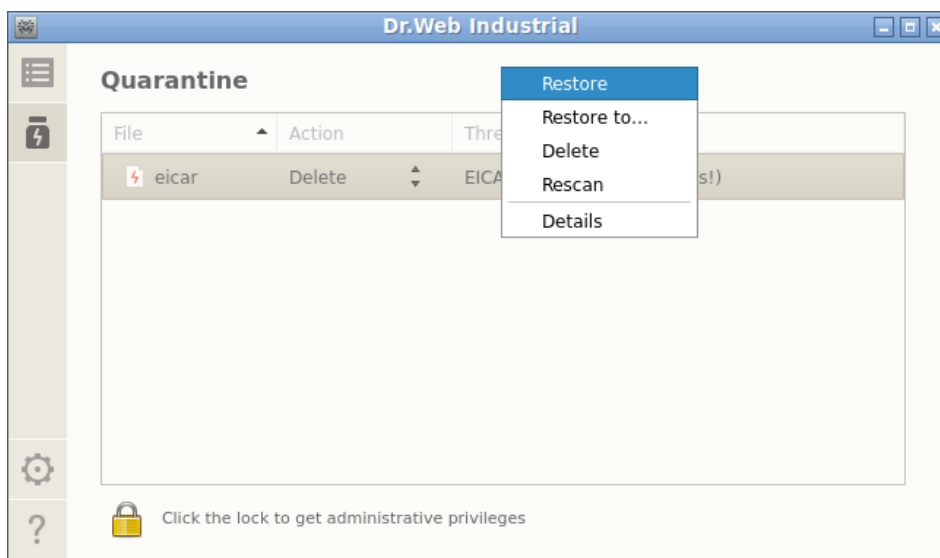


Figure 14. Quarantine management

If the quarantine is not empty, the following information is displayed for every threat:

- a name of a malicious object;
- an [action](#) to be applied to the quarantined object;
- a name of the [threat](#) contained in the object as classified by the Doctor Web company.

Applying actions to quarantined objects

To apply an action to a quarantined object, right-click the row with the information about this object and select a required action from the context menu. If you need to apply an action to several quarantined objects, select the corresponding rows in the list before opening the context menu. To select several rows, hold CTRL or SHIFT:

- When you hold CTRL, quarantined objects are selected one by one.
- When you hold SHIFT, quarantined objects are selected contiguously.

The context menu provides the following actions:

- **Restore**—restore the selected objects to their original location on the file system.
- **Restore to**—restore the selected objects to a specified file system location (a window for choosing a target directory will appear).
- **Delete**—irreversibly delete the selected objects.
- **Rescan**—scan the selected objects again and cure them if possible.



If the selected action is successfully applied to the selected object, its row is removed from the table. If the attempt fails, the corresponding row remains active, its text becomes red and the **Action** field displays details on the error.



To apply actions to quarantined objects, it may be necessary to elevate [application privileges](#); in particular, this is necessary to apply actions to the objects quarantined by another user.

Viewing details on quarantined objects

To receive detailed information about any quarantined object, right-click the corresponding row and select **Details** from the context menu. This opens a window with the detailed information about the object. If you need to get the detailed information about several quarantined objects, select them in the list before opening the context menu.

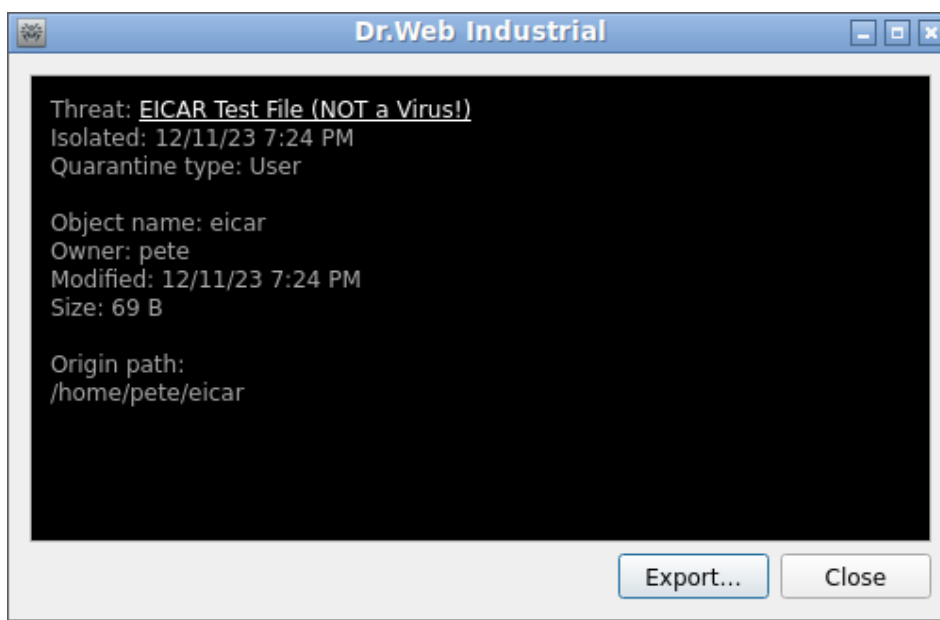


Figure 15. The information about the quarantined object

This window displays the following information:

- a threat name as classified by the Doctor Web company;
- the date and time when the object was quarantined;
- a [type of the quarantine](#) where the object is isolated;
- a name of the last applied action and its result;
- the information about the quarantined file system object: its name, user/owner, last modification date and path on the file system.

Click the name of the threat to open a webpage with its description (the Doctor Web official website will be visited; an internet connection is required).



Click **Export** to save the information displayed in the window to a text file (a file chooser window will open). To close the window with the detailed information about the threat and the object containing it, click **Close**.

8.1.4. Updating Anti-Virus Protection

In this section

- [General information](#)
- [Configuring updates](#)
- [Updating offline](#)
- [Issues with the updater](#)

General information

Periodic updates of virus databases and the anti-virus engine are downloaded and installed by Updater automatically. You can view the update status and, if required, force updating on a specialized page of the Dr.Web Industrial for Linux window. Virus databases are considered outdated after a day from the moment of the last successful update. To open the update management page, click **Last update** on the [main page](#).

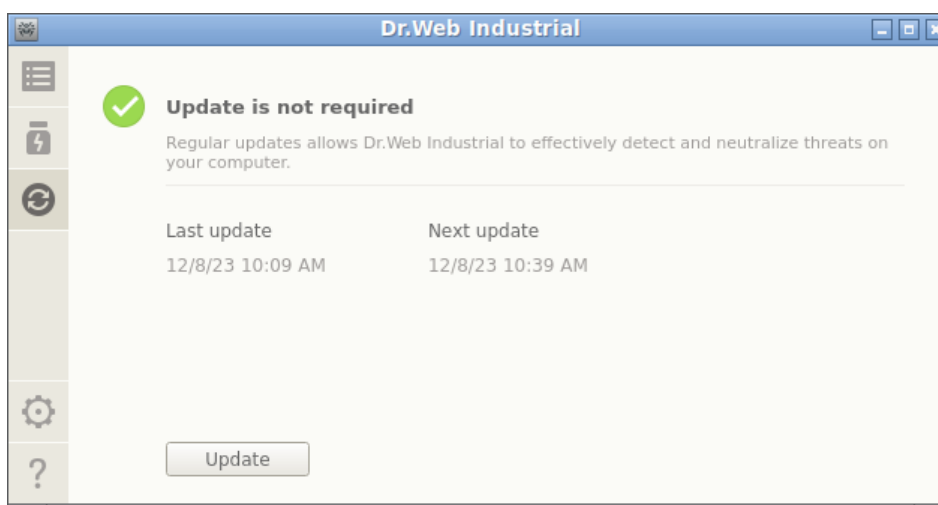


Figure 16. Update management

The update management page displays the following information:

- status of the virus databases and of the scanning engine;
- information about the last successful update and the date of the next scheduled update.

To force updating, click **Update**. To close the update management page, select another page by clicking a corresponding button on the navigation pane.



If Dr.Web Industrial for Linux operates in a [centralized protection mode](#), this page will be blocked.



Configuring updates

You can configure Dr.Web Industrial for Linux update settings in the [settings window](#) on the **Main** [tab](#).

Updating offline

Updating anti-virus protection offline is available only via the command line. Command examples can be found in the [corresponding section](#).

Issues with the updater

If Updater fails, error information is displayed on the update management page. To resolve the issue, refer to [Appendix F](#), where you can find a detailed description of the known errors.

8.1.5. License Manager

In this section

- [General information](#)
- [Starting the License Manager](#)
- [License activation](#)
 - [Activation of a license or demo period using a serial number](#)
 - [Installation of a key file obtained earlier](#)
- [Deleting the license key file](#)

General information

License Manager allows to view information on the current license issued for the user of Dr.Web Industrial for Linux. License data is stored in a license key file that provides operation of Dr.Web Industrial for Linux on the user computer. If neither license key file nor demo key file is found on the computer, all Dr.Web Industrial for Linux functions (including the file scan, file system monitoring, virus database update) are blocked.

Starting the License Manager

License Manager page is available in the Dr.Web Industrial for Linux graphical interface. To open the page, click **License** on the [main page](#).

If a key file associated with some license for Dr.Web Industrial for Linux granted to the user or with an active demo period is installed, the License Manager start page displays information about the license including its number, owner, and period retrieved from the key file.

The figure below shows appearance of the License Manager page.

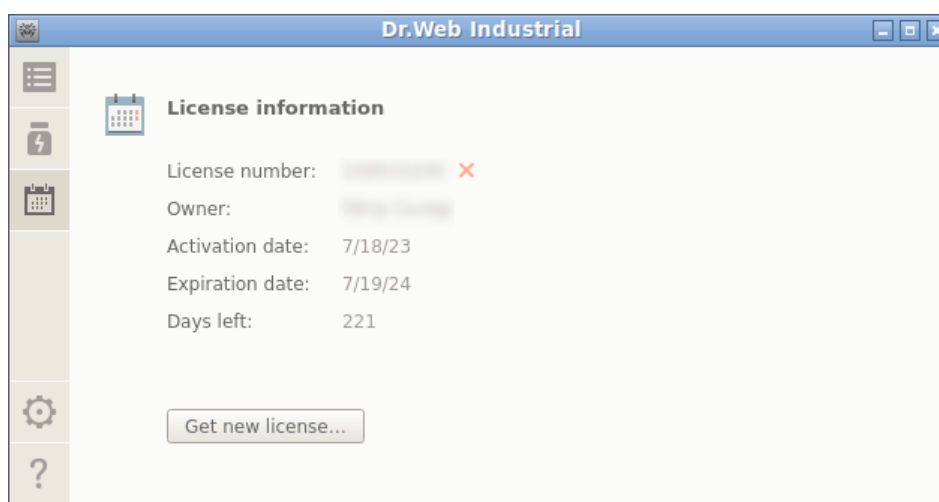


Figure 17. License information

To [delete](#) a license key file, click  next to the license number.

The License Manager page will close if you select any other page by clicking a corresponding button on the navigation pane.

License activation

To activate a license or a demo period via License Manager (in particular, to purchase a new license or renew the current one) and obtain the corresponding key file making Dr.Web Industrial for Linux functional, click **Get new license**. After that, the registration wizard opens. The registration wizard also opens automatically when Dr.Web Industrial for Linux is started for the first time after installation.

In the first step, you must select an activation type. The following two types are available:

1. [Activation](#) of a license or a demo period using an available serial number.
2. [Installation](#) of a key file obtained earlier.



To register a serial number or to get a demo period, an internet connection is required.

Activation of a license or demo period using a serial number

To activate a license or a demo period using an available serial number, enter it in the text field and click **Activate**.

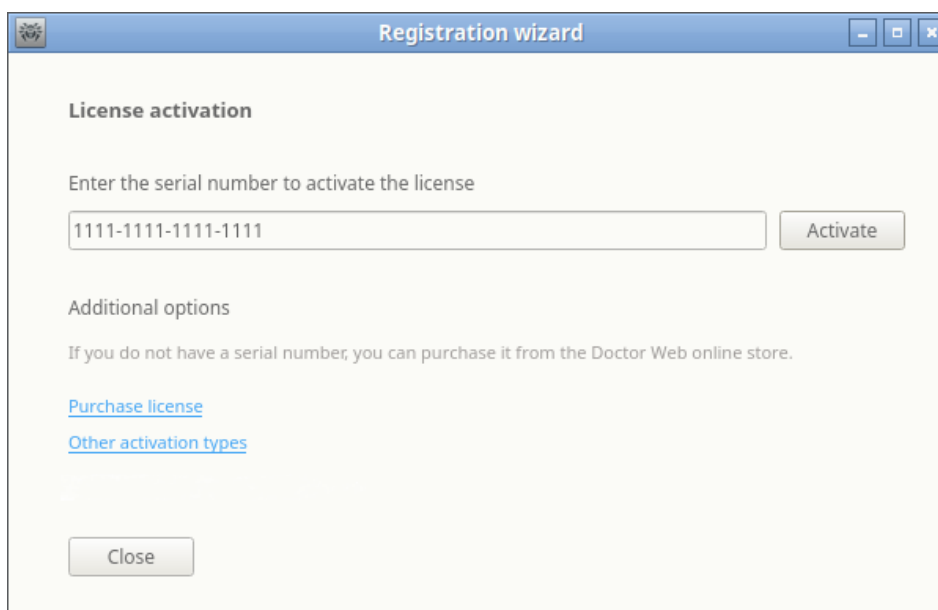


Figure 18. Registration using a serial number



If you do not have a serial number or a valid key file, you can purchase the license at the official website of Doctor Web. To open the online store page, click **Purchase license**.

For information about other ways to purchase the license for Dr.Web products, refer to the [Registration and Activation](#) section.

Once you click **Activate**, a connection to the Doctor Web registration server will be established.

If the serial number specified in the first step corresponds to a license for two computers, you need to select the number of computers to run Dr.Web Industrial for Linux. If you select **On two computers**, you can activate the second serial number on another computer and receive another license key file. The registered licenses will have the same validity period (for example, one year). If you select **On one computer**, you must specify the second serial number from the kit. In this case, you will not be able to register this serial number later on another computer (or use on this computer a copy of the license key file received after the activation of the combined license), but the duration of the current license will be doubled (for example, extended to two years if the license period is one year).



Figure 19. Selecting the number of computers

After selecting the number of computers to activate the license on, click **Next**, and if you have selected **On one computer**, enter the second serial number from the kit in the next step of the wizard, and click **Next** once again.

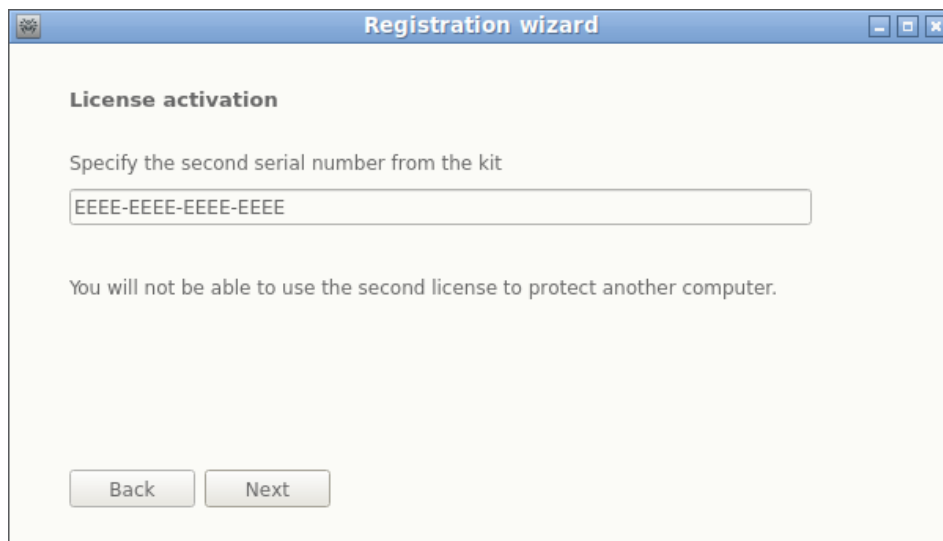


Figure 20. Entering the second serial number from the kit

To continue the registration, click **Next**.

In the next step, you are prompted to specify a previous license.

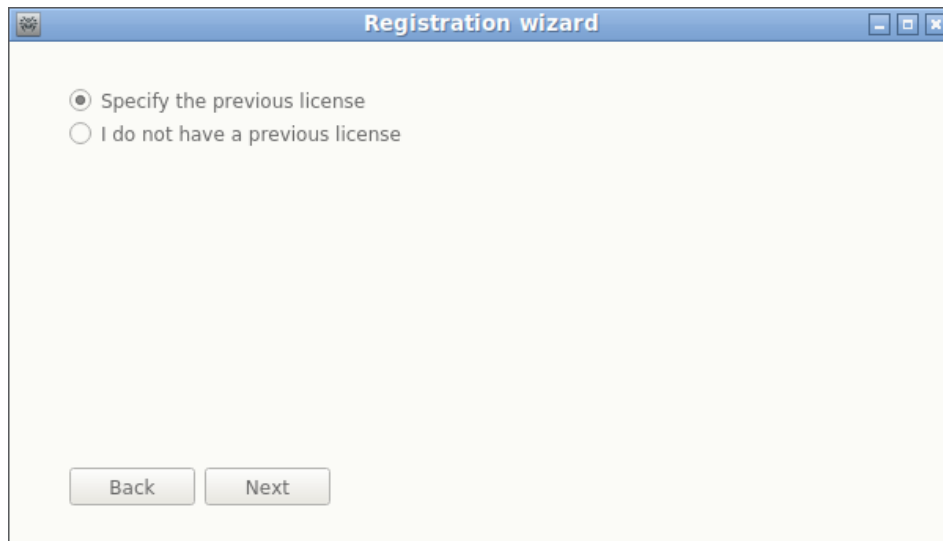


Figure 21. Prompting to specify a previous license

If you have selected **Specify the previous license**, specify the previous license serial number or a path to the corresponding key file in the opened window.



Figure 22. Specifying a previous license

If you specify a license which is not expired, the new license period will be extended by the remaining period of the previous license.

To specify the previous license, you can either enter its serial number in the corresponding box or specify its key file. The previous license type can be selected in a drop-down list to the left of the input box. To specify the key file, do one of the following:

- enter the path to it in the input box;
- specify the file via a standard file chooser by clicking **Browse**;
- drag and drop the file from the file manager window to the window of the registration wizard.



You can specify a `.zip` archive containing the key file without unpacking it.



To continue the registration, click **Next**.

In the next step, specify valid registration information including the following:

- registration name;
- your region (country) selected from the list;
- valid email address.

All registration form fields are mandatory.



The screenshot shows a window titled "Registration wizard" with standard Linux window controls. The main content area is titled "Last step" and contains the instruction: "To finish the activation, please enter the information on the license owner." Below this, there are three input fields: "Registration name" with the placeholder text "User Name", "Region" with a dropdown menu showing "United States of America", and "Email address" with the placeholder text "user@mail.com". At the bottom of the window, there are three buttons: "Back", "Close", and "Finish".

Figure 23. User information

After all fields are filled in, click **Finish** to connect to the server and obtain the license key file. If necessary, you can use the license key file on another computer after you [remove](#) it from the current computer.

Installation of a key file obtained earlier

If you already have a valid license and the corresponding key file (for example, obtained from Doctor Web or its partners via email), you can activate Dr.Web Industrial for Linux by installing this key file. For that purpose, click **Other activation types** in the first step of activation and specify the key file path in the displayed input box.

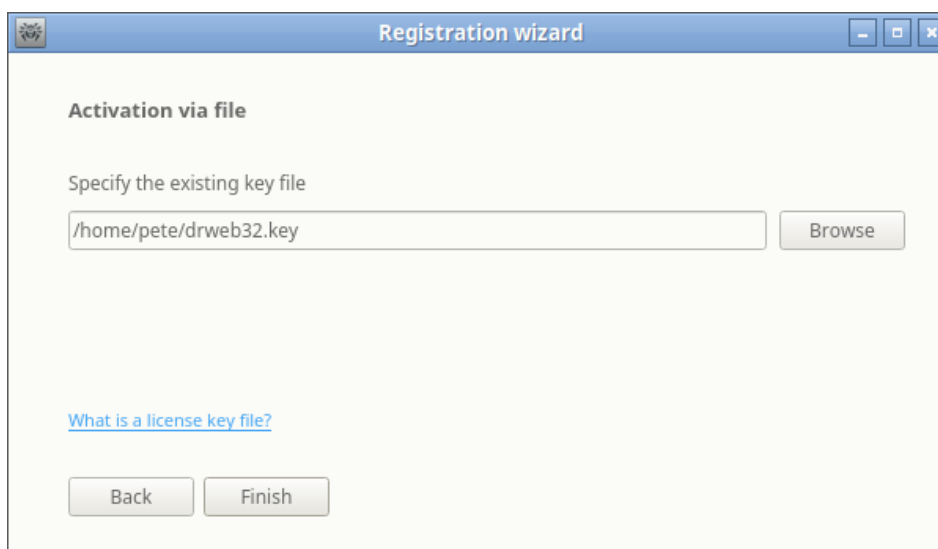


Figure 24. Activation via key file

To specify the key file, you can:

- enter the path to it in the input box;
- specify the file via a standard file chooser by clicking **Browse**;
- drag and drop the file from the file manager window to the window of the Registration wizard.



You can specify a `.zip` archive containing the key file without unpacking it.

After you specify the key file path (or the path to the archive containing the key file), click **Finish** to install the key file automatically. If required, the key file is automatically unpacked and copied to the directory with Dr.Web Industrial for Linux files. An internet connection is not required in this case.

After the activation procedure completes (using any method described above), the final page of the registration wizard with the notification of successful activation of a license or a demo period is displayed. Click **OK** to exit the registration wizard and return to the [main page](#) of Dr.Web Industrial for Linux.

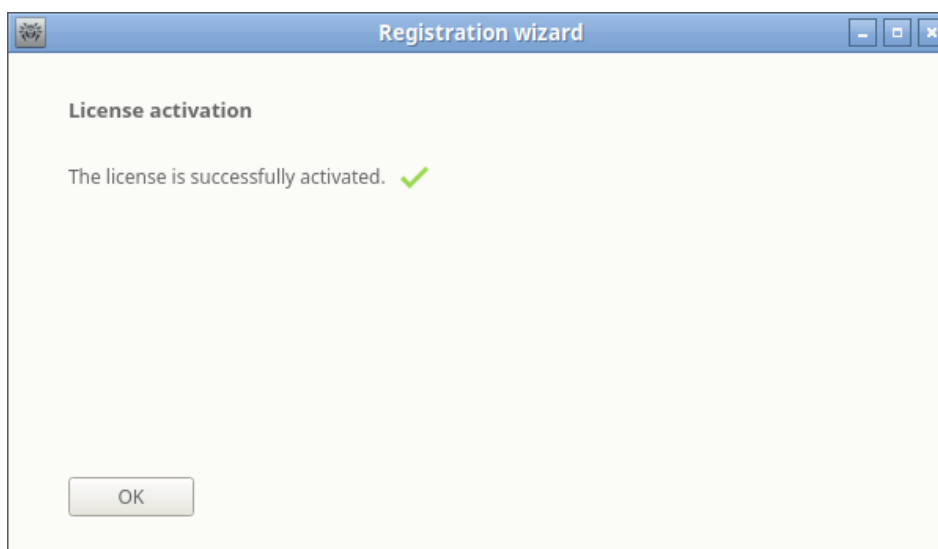


Figure 25. Successful activation notification

If an error occurs in any step of the registration process, a page with the corresponding notification and short error description is displayed. The figure below shows an example of such a page.

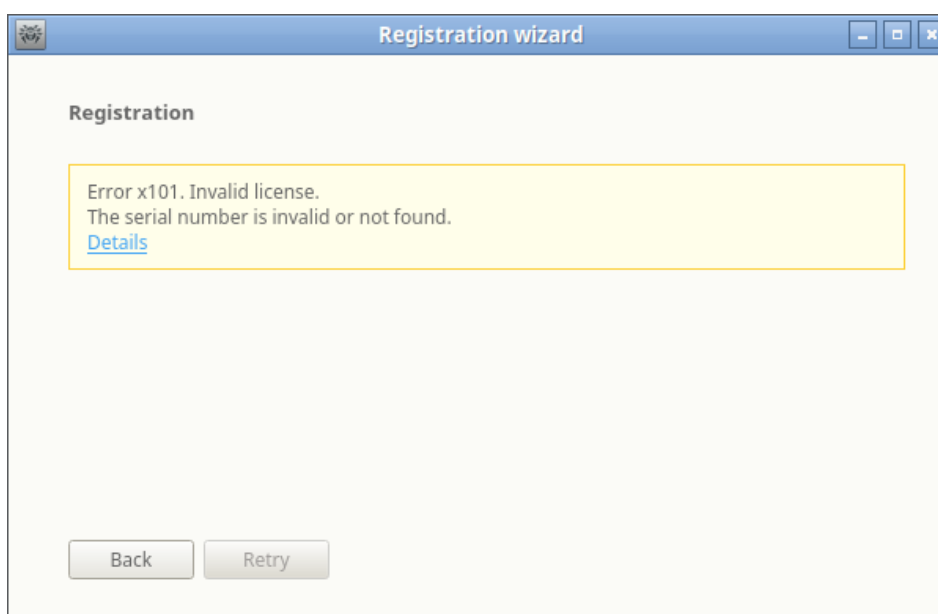


Figure 26. Error message

If an error occurs, you can return to the previous step to make corrections (for example, correct the serial number or specify the correct file path). To do this, click **Back**.

If the error is caused by a temporary issue (for example, temporary network failure), you can try to repeat this step by clicking **Retry**. If necessary, click **Close** to cancel the registration and exit the registration wizard. In this case, you will need to retry the registration procedure later. If the wizard cannot establish a connection to the Doctor Web registration server to verify the serial number, the page with the corresponding message is displayed.

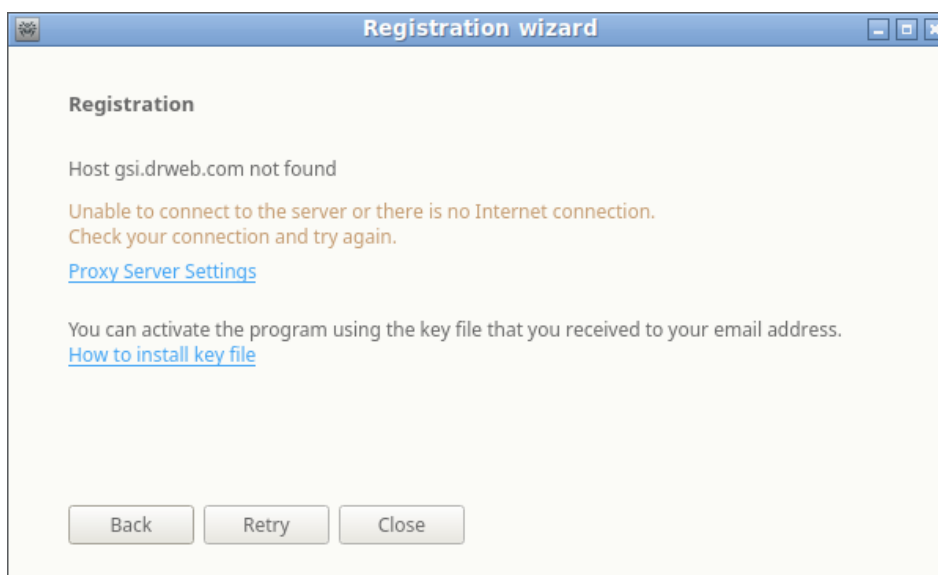


Figure 27. Registration server connection error

If the error has occurred because your computer cannot use a direct internet connection, but you use a proxy server to access the internet, click the link **Proxy Server Settings** to open the window containing proxy server settings:

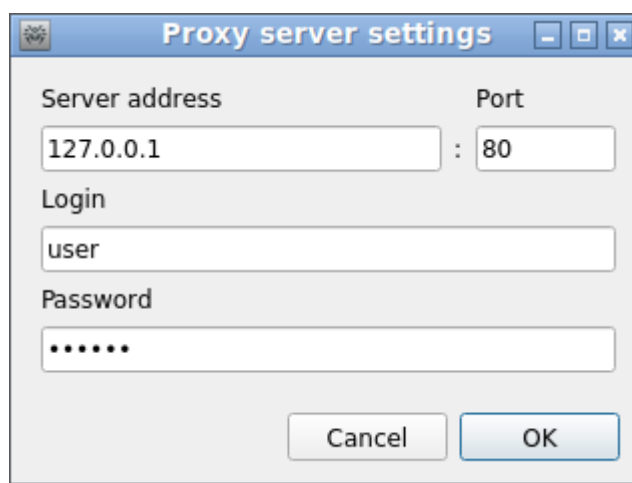


Figure 28. Proxy server settings

Specify the proxy server settings and click **OK**. After that retry establishing connection to the Doctor Web registration server by clicking **Retry**.



Upon activation of a new license and generation of a new [key file](#), the previous key file used by Dr.Web Industrial for Linux is automatically saved as a backup copy in the `/etc/opt/drweb.com` directory. If required, you can use it again by [installing the key file](#).

Deleting the license key file

If necessary (for example, you decided to use Dr.Web Industrial for Linux on another computer instead of the current computer), you can delete the installed license key file that manages

Dr.Web Industrial for Linux operation. For that purpose, open the page with [license information](#) (the start page of License manager) and click  next to the number of the current license.

After that, confirm deletion of the license key file from the current computer in the appeared window by clicking **Yes**. If you want to cancel the deletion, click **No**.

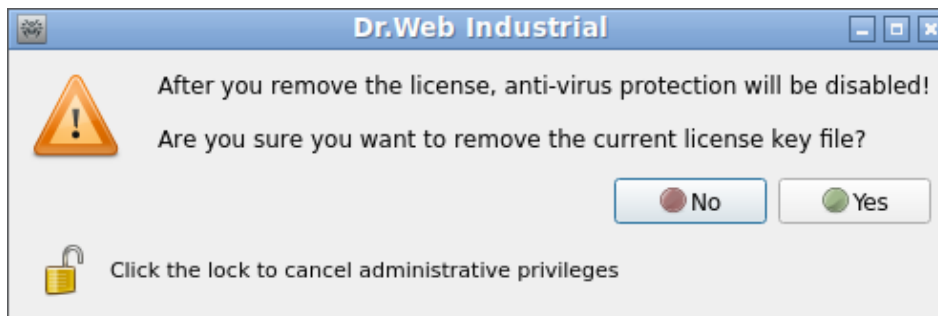


Figure 29. Confirming deletion of the key file



To delete the license key file, the application must be started with superuser privileges. If the application does not have elevated permissions, the **Yes** button is unavailable on attempt to delete the key file. If required, you can [elevate the application privileges](#) and, if the elevation succeeds, the **Yes** button becomes available.

Deletion of the license key file does not affect the license validity period. If the license is not expired, you can obtain a new key file for this license for the remaining period.

After the license key file is deleted, all anti-virus functions of Dr.Web Industrial for Linux ([file scanning](#), [updating](#) virus databases and the scanning engine, file system [monitoring](#)) are blocked until a new license or a demo period is activated.

8.1.6. Viewing Messages From a Centralized Protection Server

In this section

- [General information](#)
- [Applying actions to messages](#)
- [Message filtering](#)

General information

If Dr.Web Industrial for Linux is connected to a [centralized protection](#) server, you can use an interface to view messages on the state of the anti-virus network that are sent by the centralized protection server to the controlled workstations. An anti-virus network administrator can use this tool to monitor the network state and important events related to the operation of the centralized protection server.



The messages on the network state and events are sent to a workstation only if the anti-virus network administrator configured the corresponding setting on the centralized protection server to which Dr.Web Industrial for Linux is connected. Otherwise, the messages cannot be viewed and the corresponding page is not displayed on the Dr.Web Industrial for Linux main window.

The interface for viewing messages from the server is displayed on a separate page. To open this

page, click  on the [navigation pane](#).

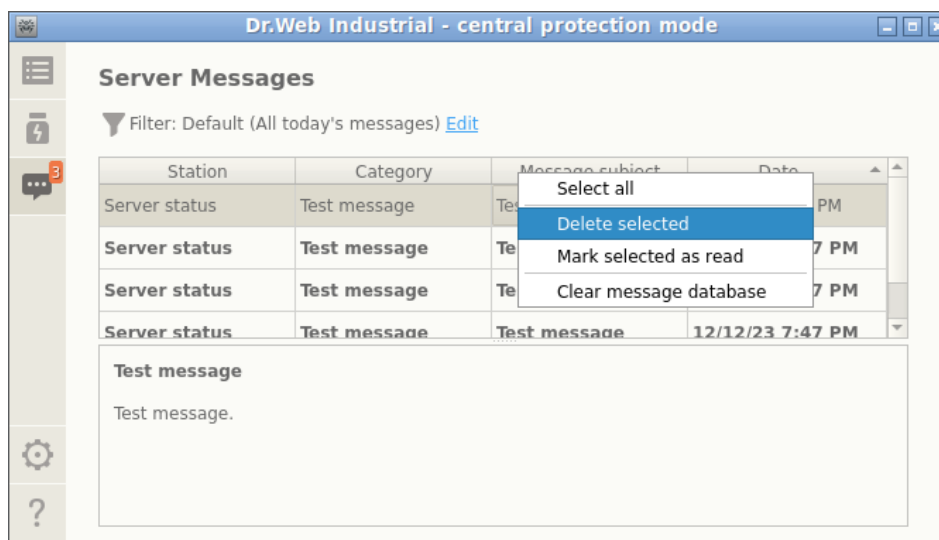


Figure 30. Messages from the centralized protection server

For each message on the list, the following information is available:

- name (address) of the workstation that is mentioned in the message;
- message category;
- message title (subject);
- date and time of sending the message by the server.

To view the message, select it from the list. The text of the selected message will be shown on the pane under the message list. Unread messages are in bold.



The text of the messages about the state and events of the anti-virus network is in the language that is specified in the centralized protection server settings.



Applying actions to messages

To apply an action to a message, right-click the row with the information about the message and select the required action in the drop-down list. If you need to apply an action to several messages, select them in the list before activating the drop-down list. To select several rows, hold CTRL or SHIFT:

- When you hold CTRL, messages are selected one by one.
- When you hold SHIFT, messages are selected contiguously.

To select all messages, press CTRL+A.

The context menu provides the following actions:

- select all filtered messages in the list;
- delete the selected messages;
- mark the selected messages as read;
- purge the message database.



If you purge the database, all received messages are deleted (including unread messages).

The messages received from the centralized protection server are automatically deleted at the end of the maximum storage time that is specified in [settings](#).

Message filtering

Since the server can send a significant number of messages, you can filter them by a sending server address, an anti-virus network workstation name, a message category or a receiving period. By default, the enabled filter shows all categories of messages received from all servers during the current day.

If necessary, you can edit the message filter. For that, click the **Edit** link. After that, the filter pane opens at the top.

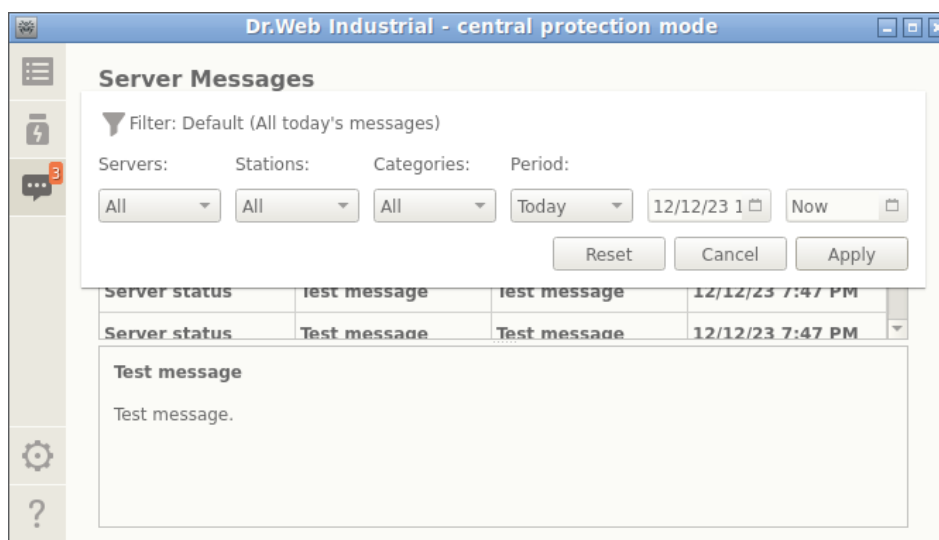


Figure 31. Message filter pane

On the filter pane, you can specify the following filtering parameters:

- **Servers**—a list of servers from which the messages are shown.
- **Stations**—a list of workstations about which the messages are shown.
- **Categories**—a list of message categories to show.
- **Period**—a generation period of the messages to show. You can select a standard period from the list or you can specify specific start and end time of the generation period.

To save changes to the filter, click **Apply**. To close the filter pane and discard the changes, click **Cancel**. To reset the filter to the default values, click **Reset**.

8.1.7. Managing Application Privileges

Some actions in the Dr.Web Industrial for Linux window can be performed only if the application has elevated privileges (*administrative privileges*) that correspond to the *superuser* (the *root* user) privileges. Among such actions are the following:

- [management of objects](#) put in the system quarantine (that is, in the quarantine [directory](#) not owned by the user who started Dr.Web Industrial for Linux);
- [scanning of files and directories](#) of other users (in particular, the superuser);
- [disabling](#) the SplDer Guard file system monitor;
- [removal](#) of a license key file, [connection and disconnection](#) from a centralized protection server.



Even if the application is started by root (for example, by using `su` or `sudo` commands), it is *not* granted elevated privileges by default.



All pages of the Dr.Web Industrial for Linux window that provide for actions requiring elevated privileges contain a special button with a lock icon. The icon indicates whether or not the Dr.Web Industrial for Linux window currently has superuser privileges:

	The application does not have elevated privileges. Click the icon to elevate the privileges to superuser privileges.
	The application has elevated privileges. Click the icon to lower the privileges; that is, to switch from superuser to user privileges.

Once you click the icon for privilege elevation, the user authentication window opens.



Figure 32. Authentication window

To grant superuser privileges to the application, provide the name (login) and password of the user indicated in the Dr.Web Industrial for Linux settings as an *administrator group*, or the login and password of the superuser (the *root* user) and click **OK**. To cancel the privilege elevation, close the window by clicking **Cancel**. To view or hide a hint about authentication, click **Help**.



By default, during the installation of Dr.Web Industrial for Linux, a system group of users who can elevate their rights to superuser privileges (for example, the *sudo* group) is selected as the administrator group. If the name of such system group cannot be determined, you can enter the superuser (the *root* user) login and password in the authentication window to elevate application privileges.

Switching from administrative privileges to user rights does not require authentication.



8.1.8. Help and Reference



To access the Help file, click  on the [navigation pane](#) of Dr.Web Industrial for Linux.

The following drop-down list will appear:

- **Help**—open the Dr.Web Industrial for Linux User manual.
- **Forum**—open the webpage of the Doctor Web forum (requires an internet connection).
- **Technical support**—open the Doctor Web technical support webpage (requires an internet connection).
- **My Dr.Web**—open your personal webpage on the Doctor Web official website (requires an internet connection).
- **About**—open a window with information about your version of Dr.Web Industrial for Linux.

Additionally, when a page of the Dr.Web Industrial for Linux main window displays an error message, you can follow the **Details** link to get information about the error and instructions to resolve the issue.

8.1.9. Operation Settings

You can configure the following operation parameters in Dr.Web Industrial for Linux settings window:

- update frequency;
- reaction of Dr.Web Industrial for Linux to threats detected during [scanning on demand](#) by Scanner or detected by the SpIDer Guard file system monitor;
- a list of objects excluded by Scanner and SpIDer Guard from scanning;
- schedule of scans performed by Scanner;
- protection mode (standalone or centralized).



To open the settings window, click  on the [navigation bar](#).

The following pages are available in the settings window:

- [Main](#) allows to configure notifications and frequency of automatic updates.
- [Scanner](#) allows to configure reaction of Dr.Web Industrial for Linux to threats detected by Scanner during scans on demand or scheduled scans.
- [SpIDer Guard](#) allows to configure reaction of Dr.Web Industrial for Linux to threats detected by the SpIDer Guard file system monitor.
- [Exclusions](#) allows to configure the list of objects to be excluded from scans on demand or scheduled scans, as well as from the list of objects monitored by SpIDer Guard.
- [Scheduler](#) allows to configure periodical scanning according to the specified schedule.



- [Mode](#) allows to select a [protection mode](#) (standalone or centralized protection) in which Dr.Web Industrial for Linux operates.



To open the help file, click on the corresponding page of the settings window.



All settings changed on these pages are applied immediately.

If Dr.Web Industrial for Linux operates in [centralized protection mode](#), some settings can be blocked and unavailable for modification.

8.1.9.1. Main Settings

In this section

- [General information](#)
- [Configuring a proxy server for updates](#)

General information

On the **Main** tab, you can configure the main application settings.

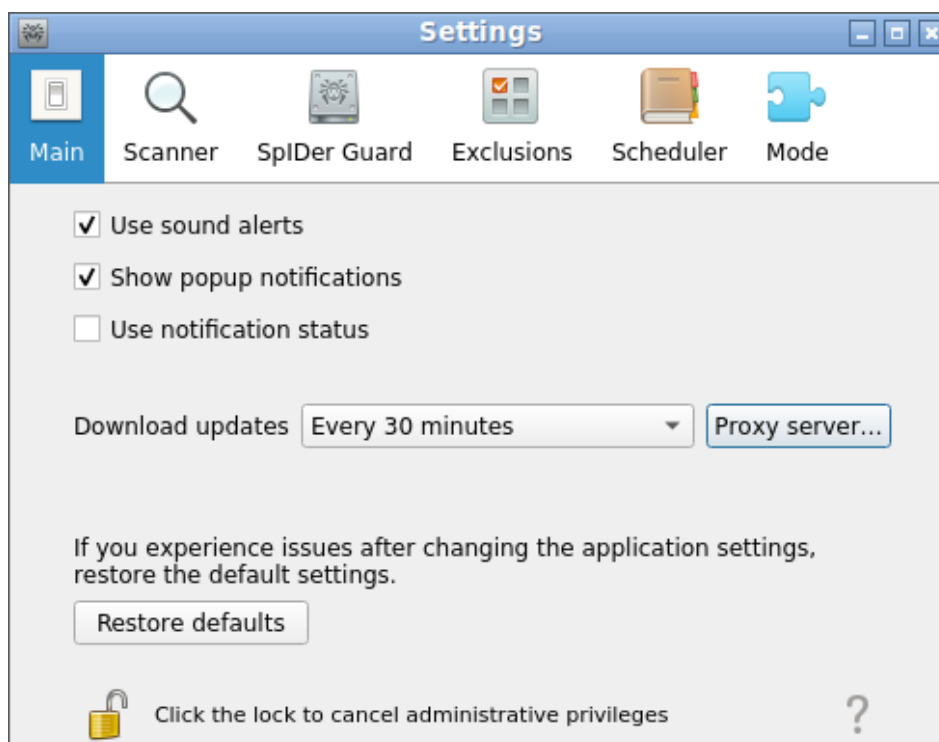


Figure 33. Main settings

Control	Action
Check box Use sound alerts	Select this check box if you want Dr.Web Industrial for Linux to use sound notifications on such events as: • threat detected (by Scanner or SplDer Guard); • object scan error; • and so on.
Check box Show popup notifications	Select this check box if you want Dr.Web Industrial for Linux operating in graphical mode to show pop-up notifications on particular events, such as • date/time of detecting the threat; • scan error; • and so on.
Check box Use notification status	Select this check box if you want Dr.Web Industrial for Linux to show pop-up notifications when the status of the components changes (for example, they are enabled or disabled). An alternative mechanism of showing pop-up notifications is used, which may be useful, for example, if the desktop environment does not support showing the icon of Dr.Web Industrial for Linux in the notification area.  If this feature is not supported by the desktop environment, this check box will be absent on the Main tab.



Control	Action
Drop-down list Download updates	Select the frequency with which virus databases and the scanning engine are automatically updated.
Button Proxy server	Open a window to configure a proxy server for receiving updates. The proxy server may be needed if connecting to external servers is prohibited by network security policies.
Button Restore defaults	Click to restore default settings.



To manage update settings and restore defaults, the application must have root privileges (refer to the [Managing Application Privileges](#) section).

Configuring a proxy server for updates

In the window to configure a proxy server for receiving updates, you can adjust the following parameters:

- enable or disable the use of the proxy server for receiving updates;
- an address of the proxy server to be used for receiving updates;
- a port for connecting to the proxy server;
- a login and a password used for authentication on the proxy server.

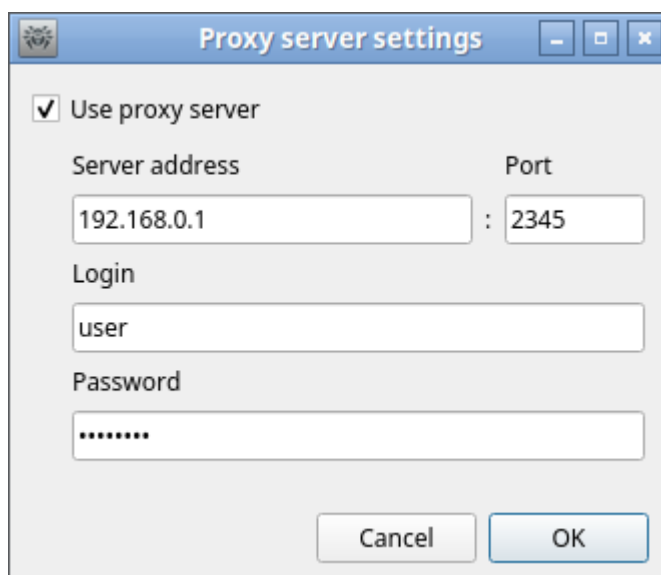


Figure 34. Proxy server settings



The proxy-server address and port are mandatory parameters. As the address, you can specify either an IP address or FQDN of the host on which the proxy server operates. Since updates are received via HTTP, an HTTP proxy server must be used. You must specify a login and a password only if the HTTP proxy server requires authorization.

To save the changes and close the window, click **OK**. To discard the changes and close the window, click **Cancel**.

8.1.9.2. File Scanning Settings

In this section

- [General information](#)
- [Advanced file scanning settings](#)

General information

On the **Scanner** tab, you can configure actions to be applied by Dr.Web Industrial for Linux to threats detected by Scanner while scanning files [on demand](#) or [on schedule](#).

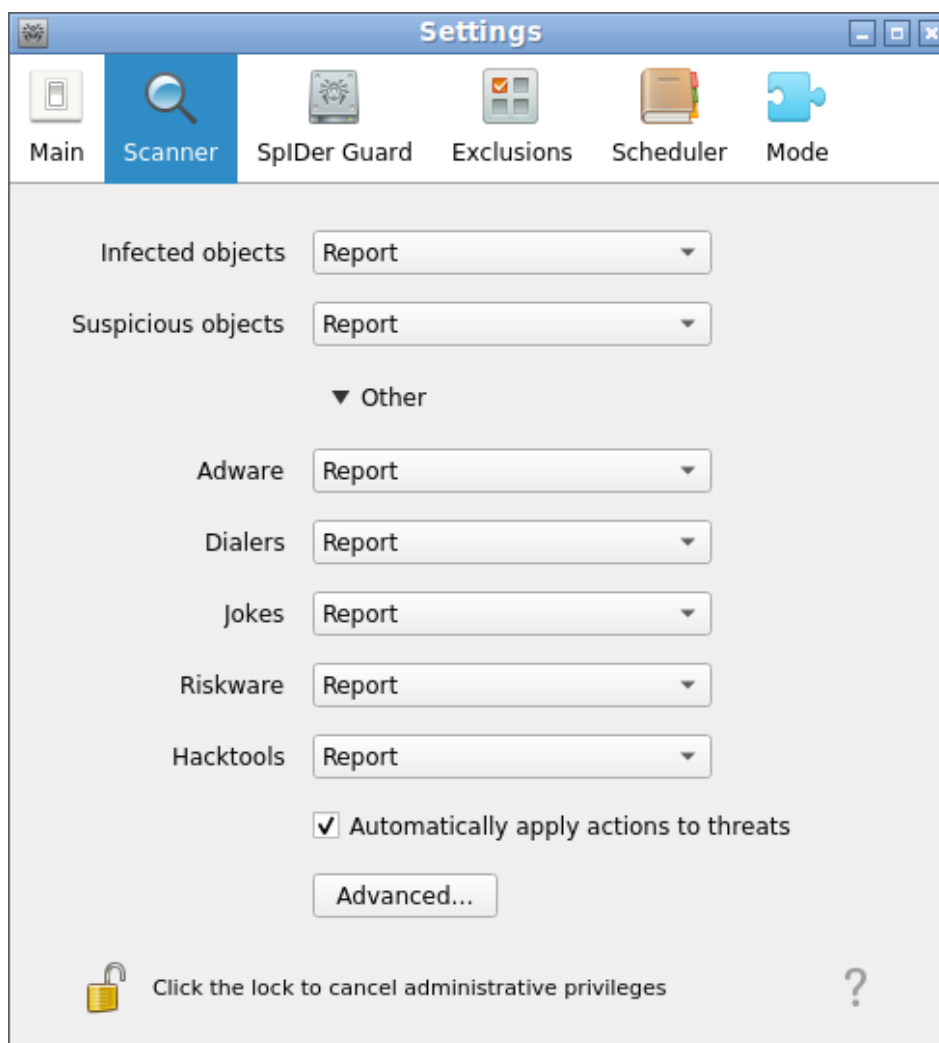


Figure 35. Scanner settings

Select [actions](#) from the drop-down lists to be applied by Dr.Web Industrial for Linux to objects upon detection of any threat of the [corresponding type](#).



If a threat is detected in a file inside a container (an archive, an email message and so on), the container is quarantined and not deleted.

By selecting the check box **Automatically apply actions to threats**, you instruct Dr.Web Industrial for Linux to apply the specified action to a threat once it is detected by Scanner while scanning on demand or on schedule (you will be informed about threat neutralization, and threat details will be available on the [threat list](#)). If the check box is cleared, the threat detected by Scanner will be added to the list of detected threats and you will need to manually select the action to be applied to the object containing the threat.

Click **Advanced** to open the window with advanced file scanning settings.

Notes:

- You can exclude files and directories from scanning by Scanner on the **Exclusions** [tab](#).



- Reactions to threat detection defined for Scanner, including automatically applying actions, do not have an effect on the behavior of the SpIDer Guard monitor. Its reactions are specified on the [corresponding page](#).



To change the reaction of Scanner to threats and access advanced settings, the application must operate with elevated permissions (refer to the [Managing Application Privileges](#) section).

A possibility to configure Scanner when Dr.Web Industrial for Linux is controlled by a [centralized protection](#) server can be blocked if this is not allowed by the server.

Advanced file scanning settings

You can configure the following parameters of Scanner on the window with advanced scanning settings:

- Enable and disable the scanning of containers:
 - archives;
 - mail files.
- Set a time limit for scanning one file.

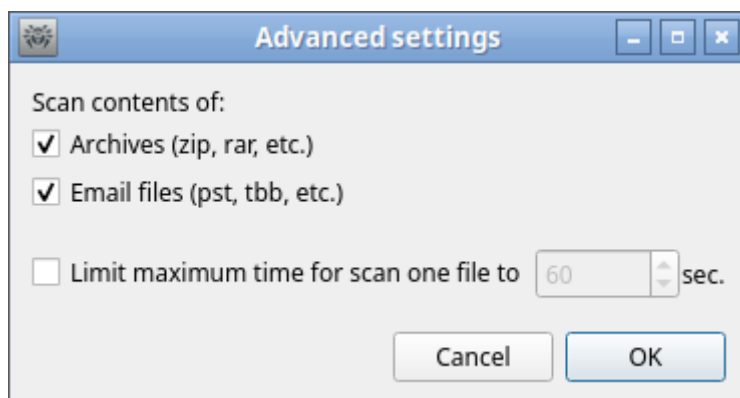


Figure 36. Advanced file scanning settings



If the check boxes that enable the scanning of containers are not selected, the container files are scanned by Scanner anyway, but enclosed files are excluded from scanning.

To save the changes and close the window, click **OK**. To discard the changes and close the window, click **Cancel**.

8.1.9.3. File System Monitoring Settings

On the **SpIDer Guard** tab, you can configure actions to be applied by Dr.Web Industrial for Linux to threats detected by the SpIDer Guard file system monitor.

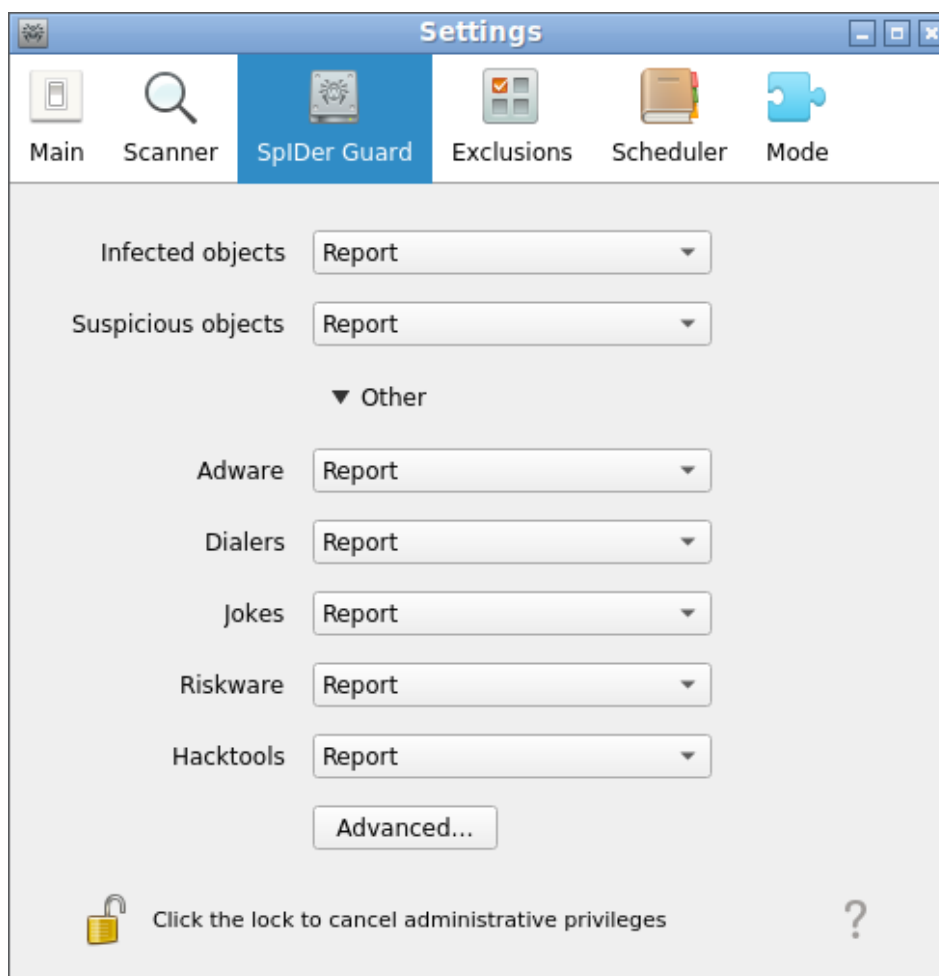


Figure 37. File system monitoring settings

This tab, including the window with advanced settings, is similar to the **Scanner** tab where [file scanning settings](#) can be adjusted.



If a threat is detected in a file inside a container (an archive, an email message and so on), the container is quarantined and not deleted.

Notes:

- You can exclude files and directories from SpIDer Guard monitoring on the **Exclusions** [tab](#).
- For details on enabling the enhanced file monitoring mode for SpIDer Guard, refer to the [File Monitoring Modes](#) section.
- Reactions to threat detection specified for the SpIDer Guard monitor do not have an effect on the behavior of Scanner. The Scanner reactions are specified on the [corresponding tab](#).



To change the settings of the SpIDer Guard file system monitor, the application must operate with elevated permissions (refer to the [Managing Application Privileges](#) section).

A possibility to configure SpIDer Guard when Dr.Web Industrial for Linux is controlled by a [centralized protection](#) server can be blocked if this is not allowed by the server.



8.1.9.4. Configuring Exclusions

On the **Exclusions** tab, you can see the following buttons for configuring exclusions:

- **Files and directories**—open the window with a [list of paths](#) to file system objects that are excluded from scanning by Scanner and the SpIDer Guard file system monitor.

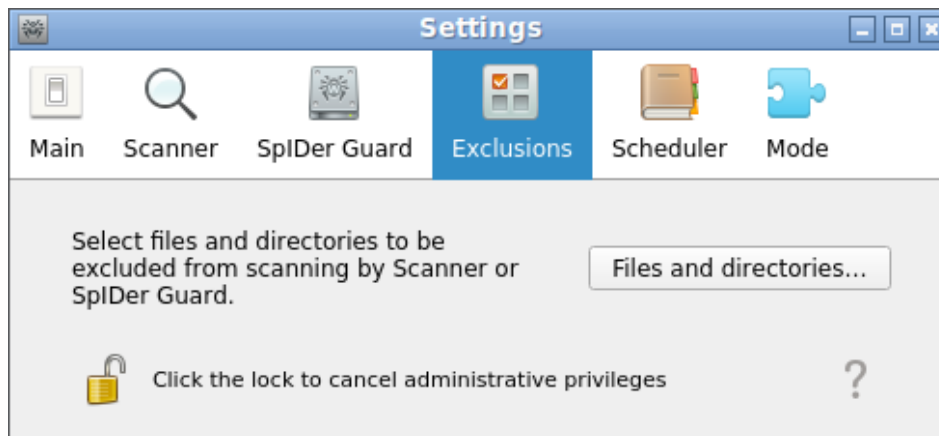


Figure 38. Configuring exclusions



To add or remove objects from the exclusion list, the application must operate with elevated permissions (refer to the [Managing Application Privileges](#) section).

8.1.9.4.1. Excluding Files and Directories

In this section

- [General information](#)
- [Adding and removing objects from the list of exclusions](#)

General information

You can manage the list of files and directories to be excluded from scanning in the **Files and directories** window. To open it, click **Files and directories** on the **Exclusions** [tab](#).

Here you can list paths to objects that you want to exclude from scanning by Scanner at user [request](#) and/or as [scheduled](#) and from [monitoring](#) performed by the SpIDer Guard file system monitor. If a directory is specified, all directory contents is skipped, including subdirectories and nested files.

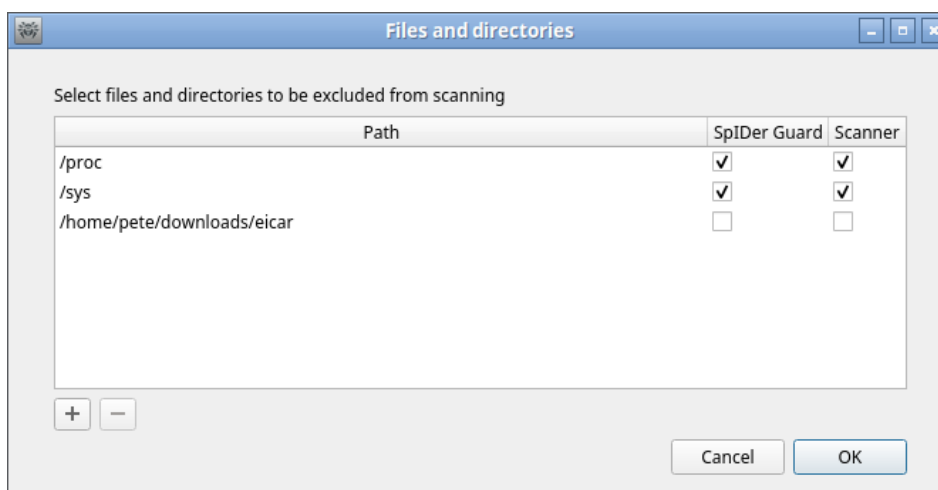


Figure 39. Configuring file and directory exclusions

The same object can be excluded from scanning by Scanner (at request or as scheduled) and from monitoring by the SpIDer Guard file system monitor. The check box in the corresponding column indicates what group of exclusions the object is added to.

Adding and removing objects from the list of exclusions

- To add an object on the list to the group of exclusions for Scanner or for SpIDer Guard, select the corresponding check box in the row of the object. To remove an from the list of exclusions for Scanner or for SpIDer Guard, clear the corresponding check box.
- To add a new object to the list, click **+** below the list and select the required object in the appeared dialog for selecting directories and files. You can also add objects to the list by dragging them from the file manager window.
- To remove an object from the list, select the corresponding line in the list and click **-** below the list.

To save the changes and close the window, click **OK**. To discard the changes and close the window, click **Cancel**.

8.1.9.5. Scheduler Settings

In this section

- [General information](#)
- [Scheduler settings](#)

General information

On the **Scheduler** tab, you can enable starting scheduled scan tasks automatically as well as adjust the schedule and select a scan type.

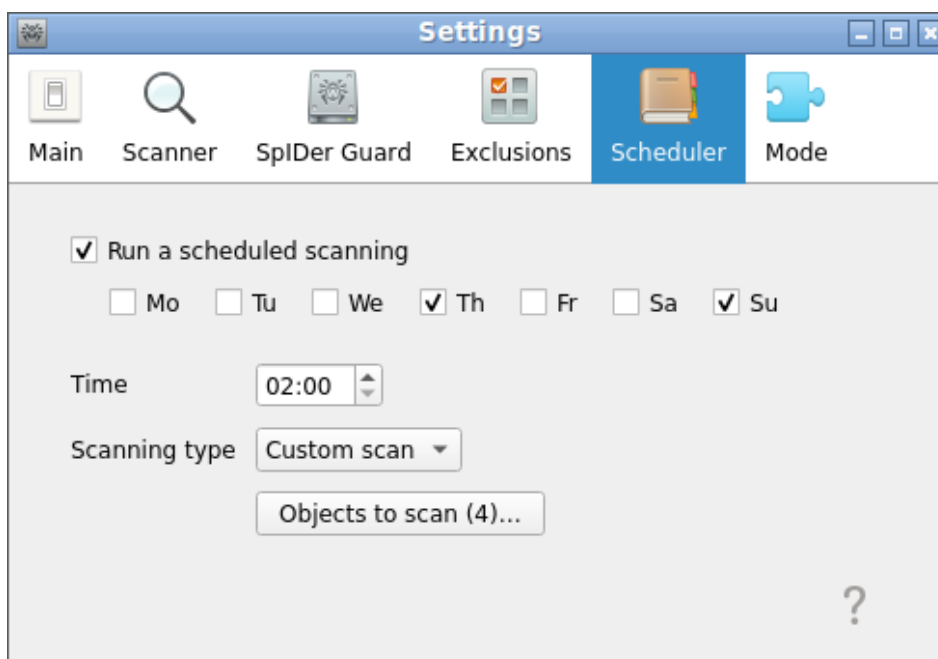


Figure 40. Scheduler settings

To enable automatic scheduled scans, select the check box **Run a scheduled scanning**. In this case, Dr.Web Industrial for Linux generates a schedule to periodically start a scan of a certain type.



Scheduled scanning is started at the specified intervals by the notification agent or directly by the graphical management interface if it is started at the same time with scanning. Scheduled scanning is not started if Dr.Web Industrial for Linux is controlled by a [centralized protection](#) server or an active [license](#) is unavailable.

Scheduled scanning as well as [scanning on demand](#) is configured on the **Scanner tab**.

Scheduler settings

If scheduled scanning is enabled, you can configure the following parameters:

- select the days of the week to start scanning (to do this, select the corresponding check boxes);
- set the time (hours and minutes) to start scanning;
- select a [scan type](#) (*Express scan*, *Full scan* or *Custom scan*).

If you have selected *Custom scan*, you should also specify a list of objects to be scanned. To do that, click **Objects to scan** (a number of objects to be scanned is indicated in brackets). After that, a custom scan window appears which is similar to a window of custom [scan on demand](#). You can add objects to the list either by clicking **+** or by dragging and dropping them from the file manager window.

To disable automatic scheduled scanning, clear the check box **Run a scheduled scanning**. The respective task for the notification agent will be automatically removed.



8.1.9.6. Mode Settings

In this section

- [General information](#)
- [Connection to a centralized protection server](#)
- [Advanced settings](#)

General information

On the **Mode** tab, you can connect Dr.Web Industrial for Linux to a centralized protection server (by enabling the [centralized protection mode](#)) as well as disconnect from the centralized protection server (if so, Dr.Web Industrial for Linux will operate in standalone mode).

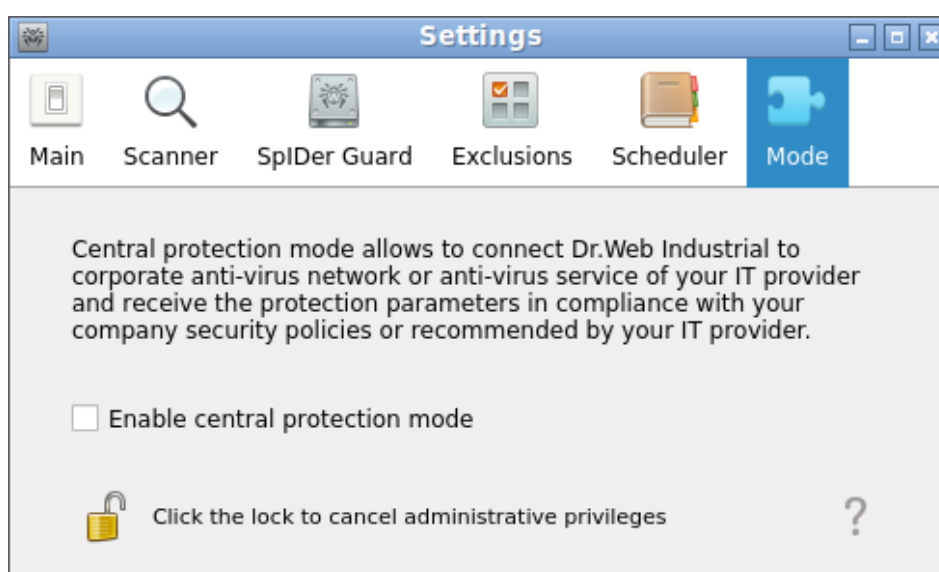


Figure 41. Mode management

To connect Dr.Web Industrial for Linux to the centralized protection server or disconnect from it, select or clear the corresponding check box.



To connect Dr.Web Industrial for Linux to the centralized protection server or disconnect from it, the application must have elevated privileges (refer to [Managing Application Privileges](#)).

Connection to a centralized protection server

On attempt to establish connection to the centralized protection server, a window with connection parameters appears:

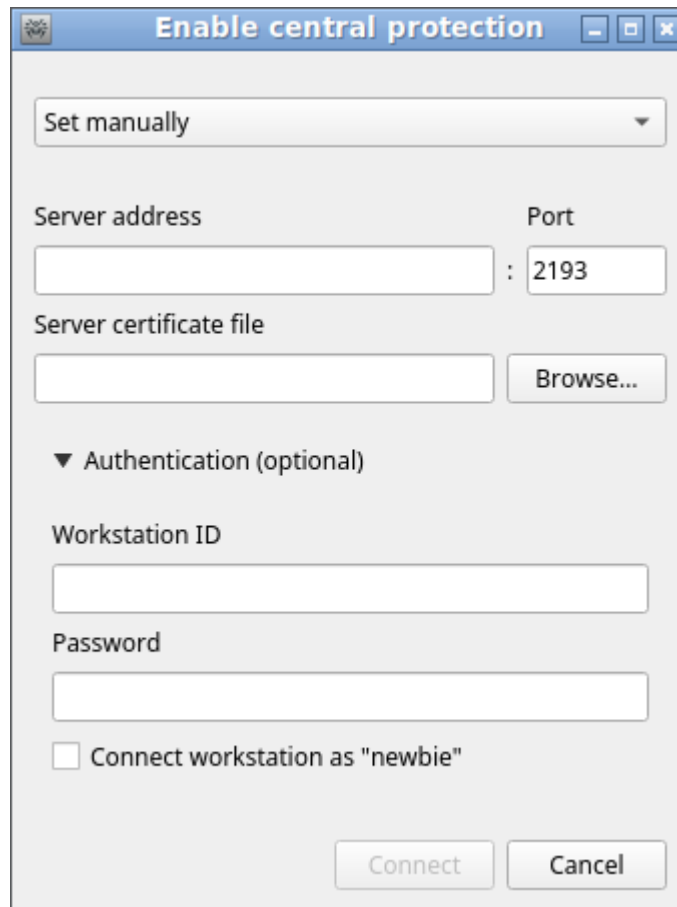


Figure 42. Connection to the centralized protection server

Select one of the methods for connecting to the server from the drop-down list located at the top of the window. Three methods are available:

- *Set manually.*
- *Detect automatically.*
- *Load from file.*

If you select the *Load from file* item, specify a path to a server connection settings file provided by an anti-virus network administrator in the corresponding field. If you select *Set manually* or *Detect automatically*, specify an address and a port for connecting to the centralized protection server as well as a path to a certificate file (usually provided by your anti-virus network administrator or internet service provider).

Additionally, in the **Authentication** section you can specify a workstation identifier and a password for authentication on the server, if you know them. If these fields are filled in, then your connection to the server will succeed only if a correct identifier/password pair was entered. If you leave these fields empty, connection to the server is established only if it is approved by the server (either automatically or by the anti-virus network administrator, depending on the server settings).

Furthermore, you can select the **Connect to workstation as newbie** check box. If the newbie option is allowed on the server and the connection is approved, the server automatically



generates a unique identifier/password pair, which will be further used for connecting your computer to this server.



If you connect as a newbie, the centralized protection server generates a new account for your computer even if it already had an account on this server.

Specify connection parameters in strict accordance with the instructions provided by your anti-virus network administrator or service provider.

To connect to the server, specify all of the parameters, click **Connect** and wait for the connection to be established. To close the window without establishing the connection to the server, click **Cancel**.



Once you have connected Dr.Web Industrial for Linux to the centralized protection server, the server will control the application until you put the application in standalone mode. The connection to the server will be established automatically when the operating system starts up (see the [Operation Modes](#) section).

If the centralized protection server does not allow the user to start scanning, the page for [starting scanning](#) and the **Scanner** button on the Dr.Web Industrial for Linux window will be disabled. Furthermore, in this case Scanner will not start scheduled scans.

Advanced settings

The drop-down list **Maximum storage time for server messages** allows you to select the maximum storage time for the [messages](#) on the anti-virus network status and events that are received by your workstation from the centralized protection server to which Dr.Web Industrial for Linux is connected. The messages will be automatically deleted at the end of the indicated period even if they are not read.



The messages on the status and events of the anti-virus network can be received only if the anti-virus network administrator has configured message delivery to your workstation on the centralized protection server to which Dr.Web Industrial for Linux is connected. Otherwise, the messages cannot be viewed and the drop-down list **Maximum storage time for server messages** is not displayed on the mode settings page.



8.1.10. Additional Information

8.1.10.1. Command-Line Arguments

To start the graphical management interface of Dr.Web Industrial for Linux from the command line, run the command:

```
$ drweb-gui [<path>[ <path> ...] | <parameters>]
```

where *<path>* is a path to be scanned. You can specify a list of space-separated paths.

Command-Line Parameters	
Parameter	Description
--version	Function: Output information about the version of the graphical interface to the console or the terminal emulator. Short form: -v Arguments: None
--help	Function: Output short help information about the command-line parameters of the graphical interface to the console or the terminal emulator. Short form: -h Arguments: None
--Autonomous	Function: Start the graphical interface in standalone instance mode. Short form: -a Arguments: None
--ExpressScan	Function: Start the graphical interface and immediately initiate an express scan. Short form: None. Arguments: None
--FullScan	Function: Start the graphical interface and immediately initiate a full scan. Short form: None. Arguments: None
--CustomScan	Function: Start the graphical interface and open a page for selection of objects to be scanned. Short form: None. Arguments: None

Example:

```
$ drweb-gui /home/user/
```

This command starts the Dr.Web Industrial for Linux graphical management interface, then Scanner starts scanning the files for the specified path (the corresponding task appears in the [list of current scans](#)).



8.1.10.2. Starting Standalone Instance

Dr.Web Industrial for Linux can be run in special mode—as a *standalone instance*.

If the graphical management interface of Dr.Web Industrial for Linux is [run](#) in standalone instance mode, then it will work with a separate set of service components (the *configuration daemon* of Dr.Web Industrial for Linux working in background (`drweb-configd`), Scanner and the scanning engine) run specifically for supporting the running instance of the software.

Aspects of the Dr.Web Industrial for Linux graphical management interface running in standalone instance mode:

- To run the Dr.Web Industrial for Linux graphical management interface in standalone instance mode, you will need a valid [key file](#), operation in [centralized protection](#) mode is not supported (it is possible to [install](#) the key file exported from a centralized protection server). In this case, even if Dr.Web Industrial for Linux is connected to the centralized protection server, the standalone instance *does not notify* the centralized protection server of the threats detected in standalone instance mode.
- All additional components that manage the operation of the standalone instance of the graphical management interface, will be started on behalf of the current user and will work with a specifically generated configuration file.
- All temporary files and Unix sockets used for interaction of components are created only in a directory with a unique name, which is created when the standalone instance is started. The unique temporary directory is created in the directory for temporary files (specified by the `TMPDIR` environment variable).
- The standalone instance of the graphical management interface *does not start* the SplDer Guard monitor, only [file scanning](#) and [quarantine management](#) functions supported by Scanner are available.
- Paths to virus databases, anti-virus engine and executable files of service components are set to default values.
- The number of simultaneously running standalone instances of the graphical management interface is unlimited.
- When the standalone instance of the graphical management interface is shut down, the set of the servicing components that manages its operation is also shut down.

8.2. Working from Command Line

To manage operation of Dr.Web Industrial for Linux from the command line, use the `drweb-ctl` utility of the Dr.Web Ctl component. The [operating principles](#) and [usage examples](#) of the utility are described in detail in the respective sections.



9. Dr.Web Industrial for Linux Components

This section contains a description of the Dr.Web Industrial for Linux components. For each of them, you can find information about its functions, operation principles and parameters stored in the [configuration file](#).

9.1. Dr.Web ConfigD

The Dr.Web ConfigD configuration management daemon is the main control component of Dr.Web Industrial for Linux. It provides centralized storage for settings of all Dr.Web Industrial for Linux components, manages the operation of all components and organizes trusted data exchange among them.

Dr.Web ConfigD performs the following functions:

- starting and stopping the components of Dr.Web Industrial for Linux depending on settings;
- restarting the components automatically in case of failures;
- starting the components upon the request of other components;
- informing the components of changed settings;
- enabling the centralized management of configuration parameters;
- passing the information from the key file in use to the components;
- receiving the license information from the components;
- receiving the new license information from the specialized components;
- informing the running components of license changes.

9.1.1. Operating Principles

The Dr.Web ConfigD configuration management daemon always runs with superuser privileges (*root*). It starts other Dr.Web Industrial for Linux components and communicates with them via a preliminarily open socket. The configuration daemon accepts connections from other Dr.Web Industrial for Linux components via an information socket (publicly accessible) and an administrative socket (accessible only to the components running with superuser privileges). The daemon loads configuration parameters and license information from files or receives this information from a centralized protection server via [Dr.Web ES Agent](#) and sets valid default values of the configuration parameters. By the time any component starts or receives the SIGHUP signal, the configuration management daemon has a comprehensive and consistent set of configuration parameters for all Dr.Web Industrial for Linux components.

Upon receiving the SIGHUP signal, Dr.Web ConfigD reloads the configuration parameters and license information. If required, the daemon also instructs all components to reload their configuration parameters.



Upon receiving the SIGTERM signal, Dr.Web ConfigD shuts down all components and then finishes its own operation. Dr.Web ConfigD removes all temporary files of the components after they are shut down.

Principles of interaction with other components

1. All components receive the configuration parameters and license information from Dr.Web ConfigD at startup. Only these settings are used by the components in their further operation.
2. Dr.Web ConfigD forwards messages from all components started with it to a unified log. All messages output to *stderr* by the components are gathered by Dr.Web ConfigD and stored in the unified log of Dr.Web Industrial for Linux with a mark indicating the component that reported an error and time of its occurrence.
3. Upon shutting down, all controlled components return an exit code. If the code differs from 101, 102 and 103, the component will be restarted and the corresponding message from *stderr* will be output to the Dr.Web Industrial for Linux log.
 - [Code 101](#) is returned when the component cannot operate with the current license. The component will be restarted only after the license parameters are modified.
 - [Code 102](#) is returned when the component cannot operate with the current configuration parameters. If some configuration parameters were modified, Dr.Web ConfigD will try to restart the component.
 - Code 103 is returned in case the components started by Dr.Web ConfigD upon request ([Dr.Web Scanning Engine](#) and [Dr.Web File Checker](#)) have been idle for a long time. The timeout after which the component is shut down with error code 103 is specified in the settings of the corresponding component (the `IdleTimeLimit` parameter).
 - If new configuration parameters received from Dr.Web ConfigD by the component cannot be applied on the fly, the component exits with code 0 so that Dr.Web ConfigD can restart it.
 - If the component cannot connect to Dr.Web ConfigD or a communication protocol error occurs, the component outputs a corresponding message to *stderr* and exits with code 1.
4. Signal exchange is maintained.
 - Dr.Web ConfigD sends the SIGHUP signal to the component instructing it to apply the modified configuration parameters.
 - Dr.Web ConfigD sends the SIGTERM signal to the component instructing it to shut down. After receiving the signal, the component should shut down within 30 seconds.
 - If the component does not shut down within 30 seconds, Dr.Web ConfigD sends the SIGKILL signal to forcibly shut down the component.



9.1.2. Command-Line Arguments

To start the Dr.Web ConfigD configuration management daemon from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-configd [<parameters>]
```

Dr.Web ConfigD accepts the following parameters:

Parameter	Description
--help	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: -h Arguments: None
--version	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: -v Arguments: None
--config	Function: Use the specified configuration file for further operation. Short form: -c Arguments: <path to file>—path to the configuration file in use.
--daemonize	Function: Run the component as a daemon; that is, without access to the terminal. Short form: -d Arguments: None
--pid-file	Function: Use the specified PID file for further operation. Short form: -p Arguments: <path to file>—path to the file to store the process identifier (PID).

Example:

```
$ /opt/drweb.com/bin/drweb-configd -d -c /etc/opt/drweb.com/drweb.ini
```

This command runs Dr.Web ConfigD as a daemon, which forces the component to use the configuration file `/etc/opt/drweb.com/drweb.ini`.

Startup notes

To enable the operation of Dr.Web Industrial for Linux, the component must run as a daemon. Under normal conditions, Dr.Web ConfigD starts automatically at the startup of the operating system; for this purpose the component is supplied with the `drweb-configd` management script located in a system directory (`/etc/init.d`). To manage the operation of the component, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line (the tool is started by running the `drweb-ctl` [command](#)).



To get documentation on this component from the command line, run the `man 1 drweb-configd` command.

9.1.3. Configuration Parameters

The Dr.Web ConfigD configuration management daemon uses configuration parameters specified in the `[Root]` section of the unified [configuration file](#) of Dr.Web Industrial for Linux.

The section contains the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the Dr.Web ConfigD component. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the configuration daemon and of those components for which another value of this parameter is not specified.  Upon its initial startup, before the configuration file is read, the configuration daemon uses the following values of the parameter: • as a daemon (if run with the <code>-d</code> option)— <code>SYSLOG:Daemon</code>; • <code>Stderr</code> otherwise. If a component is operating in the background (was started with the <code>-d</code> option from the command line), the <code>Stderr</code> value <i>cannot</i> be used for this parameter. Default value: <code>SYSLOG:Daemon</code>
<code>PublicSocketPath</code> <i>{path to file}</i>	Path to the socket used for interaction by all Dr.Web Industrial for Linux components. Default value: <code>/var/run/.com.drweb.public</code>
<code>AdminSocketPath</code> <i>{path to file}</i>	Path to the socket used for interaction by Dr.Web Industrial for Linux components with elevated (administrative) privileges. Default value: <code>/var/run/.com.drweb.admin</code>
<code>DebugIpc</code> <i>{boolean}</i>	Log or do not log detailed IPC messages at the debug level (with <code>LogLevel = DEBUG</code>). These messages reflect interaction of the configuration management daemon with other components. Default value: <code>No</code>
<code>UseMesh</code> <i>{boolean}</i>	Use or do not use the Dr.Web MeshD component for scanning. If this parameter is disabled, Dr.Web Scanning Engine is used for scanning



Parameter	Description
	instead of Dr.Web MeshD. Allowed values: • On, Yes, True—use Dr.Web MeshD; • Off, No, False—do not use Dr.Web MeshD. If the Dr.Web MeshD component is not installed, the Dr.Web Scanning Engine component is used irrespective of the set value. If none of the components is installed, the scan ends with error x119. Default value: No
UseVxcube {boolean}	Use or do not use Dr.Web vxCube to analyze email attachments as an external filter connected to the MTA. Default value: No
KeyPath {path to file}	Path to the key file (license or demo). Default value: /etc/opt/drweb.com/drweb32.key
CoreEnginePath {path to file}	Path to the dynamic library of Dr.Web Virus-Finding Engine. Default value: /var/opt/drweb.com/lib/drweb32.dll
VirusBaseDir {path to directory}	Path to the directory with virus database files. Default value: /var/opt/drweb.com/bases
VersionDir {path to directory}	Path to a directory, where the information about the current versions of Dr.Web Industrial for Linux components is stored. Default value: /var/opt/drweb.com/version
CacheDir {path to directory}	Path to the cache directory (being used to store cache for updates as well as cache for information about scanned files). Default value: /var/opt/drweb.com/cache
TempDir {path to directory}	Path to the directory with temporary files. Default value: Path from the system environment variable TMPDIR, TMP, TEMP or TEMPDIR (the environment variables are searched in this particular order). Otherwise /tmp, if none of them was found.
RunDir {path to directory}	Path to the directory with all PID files of running components and sockets used for interaction by Dr.Web Industrial for Linux components. Default value: /var/run
VarLibDir {path to directory}	Path to the directory with libraries used by Dr.Web Industrial for Linux components. Default value: /var/opt/drweb.com/lib
AdminGroup {group name GID}	Group of users with administrative privileges for Dr.Web Industrial for Linux management. These users, in addition to the superuser (the root



Parameter	Description
	user), are allowed to elevate privileges of Dr.Web Industrial for Linux components to superuser privileges. Default value: <i>Defined automatically</i> during Dr.Web Industrial for Linux installation
<code>VersionNotification</code> <i>{boolean}</i>	Notify or do not notify the user of updates for the current version of Dr.Web Industrial for Linux. Default value: <code>Yes</code>
<code>DefaultLogLevel</code> <i>{logging level}</i>	Default event logging level for all Dr.Web Industrial for Linux components. The value of this parameter is used if a custom logging level is not specified for some component. Default value: <code>Notice</code>
<code>VxcubeApiAddress</code> <i>{string}</i>	Domain name (FQDN) or IP address of a host running the Dr.Web vxCube API server to be connected to. Default value: <i>(not specified)</i>
<code>VxcubeApiKey</code> <i>{string}</i>	Dr.Web vxCube API key. Default value: <i>(not specified)</i>
<code>VxcubeProxyUrl</code> <i>{connection address}</i>	Address of the proxy server used for connecting to Dr.Web vxCube. Only HTTP proxies without authorization are supported. Possible values: <code><connection address></code>—proxy server connection parameters in the following format: <code>http://<host>:<port></code>, where: • <code><host></code> is the host address of the proxy server (an IP address or a domain name, i.e. FQDN); • <code><port></code> is the port to be used. Default value: <i>(not specified)</i>

9.2. Dr.Web Ctl

In this section

- [General information](#)
- [Remote host scanning](#)



General information

You can manage operation of Dr.Web Industrial for Linux from the command line of the operating system. For that, you can use the special Dr.Web Ctl utility (`drweb-ctl`). You can use it to perform the following operations:

- start scanning files, disk boot records and executables of active processes;
- start scanning files on remote network hosts (see the [note](#));
- start updating anti-virus components (virus databases, the scanning engine and so on depending on the distribution);
- view and change parameters of the Dr.Web Industrial for Linux configuration;
- view the status of the Dr.Web Industrial for Linux components and statistics on detected threats;
- view quarantine and manage quarantined objects (via the [Dr.Web File Checker](#) component);
- connect to a centralized protection server or disconnect from it.

User [commands](#) to control Dr.Web Industrial for Linux will only take effect if the [Dr.Web ConfigD](#) configuration daemon is running (by default, it is automatically run on system startup).



Note that some control commands require superuser privileges.

To elevate privileges, use the `su` command (change the current user) or the `sudo` command (run the specified command as another user).

The `drweb-ctl` tool supports auto-completion of commands for managing Dr.Web Industrial for Linux operation if this option is enabled your command shell. If the command shell does not allow auto-completion, you can configure this option. For that purpose, refer to the instruction manual for the used OS distribution.



When shutting down, the tool returns the exit code according to convention for the POSIX compliant systems: 0 (zero)—if an operation is successfully completed, non-zero—if otherwise.

The tool only returns a non-null exit code in the case of an internal error (for example, the tool could not connect to a component, the requested operation could not be executed, and so on). If the tool detects and possibly neutralizes a threat, it returns the null exit code, because the requested operation (such as `scan` and so on) is successfully completed. If you need to define the list of the detected threats and applied actions, analyze the messages displayed on the console.

Codes of all errors are listed in the [Appendix F. Known Errors](#) section.



Remote host scanning

Dr.Web Industrial for Linux allows you to scan files located on remote network hosts for threats. Such hosts can be not only fully-featured computing machines, such as workstations and servers, but also routers, set-top boxes, and other smart devices of the Internet of Things. To perform the remote scanning, the remote host has to provide a remote terminal access via *SSH (Secure Shell)* or *Telnet*. To access the device, you need to know an IP address and a domain name of the remote host, as well as the credentials of the user that can remotely access the system via *SSH* or *Telnet*. This user must have access rights to the scanned files (at least the reading rights).

This function can be used only for detection of malicious and suspicious files on a remote host. Elimination of threats (i.e. isolation in the quarantine, removal, and cure of malicious objects) using remote scanning is impossible. To eliminate the detected threats on the remote host, use administration tools provided directly by this host. For example, for routers and other smart devices, update the firmware; for computing machines, establish a connection (in a remote terminal mode, as one of the options) and perform the respective operations in the file system (remove or move files, etc.), or run the anti-virus software installed on them.

Remote scanning is performed only with the `drweb-ctl` command-line tool (using the `remotescan` [command](#)).

9.2.1. Command-Line Call Format

The call format for the command-line tool which manages Dr.Web Industrial for Linux operation is as follows:

```
$ drweb-ctl [<general options> | <command> [<argument>] [<command options>]]
```

where:

- *<general options>*—options that can be applied on startup when the command is not specified or can be applied for any command. Not mandatory for startup.
- *<command>*—command to be run by Dr.Web Industrial for Linux (for example, start scanning, output the list of quarantined objects and so on).
- *<argument>*—command argument. Depends on the specified command. Some commands do not accept arguments.
- *<command options>*—options for managing the operation of the specified command. Depend on the command. Some commands do not accept options.

9.2.2. General Options

The following general options are available:



Option	Description
-h, --help	Show general help information and exit. To display the help information on any command, use the call: <pre>\$ drweb-ctl <command> -h</pre>
-v, --version	Show the module version and exit
-d, --debug	Show debug information when running the specified command. It cannot be run if a command is not specified. Use the call: <pre>\$ drweb-ctl <command> -d</pre>

9.2.3. Commands

In this section

- [Anti-Virus Scanning Commands](#)
- [Commands to Manage Detected Threats and Quarantine](#)
- [Configuration Management Commands](#)
- [Advanced Commands](#)
 - [Commands to Manage Updates and Operation in Centralized Protection Mode](#)
 - [Information Commands](#)

9.2.3.1. Anti-Virus Scanning Commands

The following commands to manage anti-virus scanning are available:

Command	Description
scan <path>	Purpose: Initiate scanning the specified file or directory by the file scanning component Dr.Web File Checker. Arguments <path>—path (can be relative) to the file or directory to be scanned. This argument may be omitted if you use the --stdin or the --stdin0 option. To specify several files that satisfy a certain criterion, use the find utility (see Usage Examples) and the --stdin or --stdin0 option. Options -a [--Autonomous]—run standalone instances of Dr.Web Scanning Engine and Dr.Web File Checker to perform the specified scan, shutting them down after it is completed.



Command	Description
	 Threats detected during standalone scanning will not be added to the common list of threats detected displayed by the <code>threats</code> command, and a centralized protection server will not be notified of them, if Dr.Web Industrial for Linux is controlled by it. <code>--Report <type></code>—type of the scan report. Allowed values: • BRIEF—brief report; • DEBUG—detailed report; • JSON—serialized report in the JSON format. Default value: BRIEF. <code>--ScanTimeout <time interval></code>—timeout for scanning one file in milliseconds. If the value is set to 0, scanning time is not limited. Default value: 0. <code>--FollowSymlinks</code>—resolve symlinks automatically. <code>--PackerMaxLevel <number></code>—maximum nesting level while scanning packed objects. A packed object is executable code compressed with specialized software (UPX, PELock, PECompact, Petite, ASPack, Morphine and so on). Such objects may include other packed objects which may also include packed objects and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ArchiveMaxLevel <number></code>—maximum nesting level while scanning archives (.zip, .rar and so on) in which other archives may be enclosed, whereas these archives may also include other archives and so on. The value of this parameter specifies the nesting limit beyond which archives enclosed in other archives are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--MailMaxLevel <number></code>—maximum nesting level while scanning files of mailers (.pst, .tbb and so on) in which other files may be enclosed, whereas these files may also include other files and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ContainerMaxLevel <number></code>—maximum nesting level while scanning other types of objects inside which other objects are enclosed (HTML pages, .jar files and so on). The value of this parameter specifies



Command	Description
	the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--MaxCompressionRatio <ratio></code>—maximum compression ratio of scanned objects. The value must be no less than 2. Default value: 3000. <code>--MaxSizeToExtract <number></code>—maximum size for files enclosed in archives. Files which size is greater than the value of this parameter will be skipped when scanning. The size is specified as a number with a suffix (<i>b</i>, <i>kb</i>, <i>mb</i>, <i>gb</i>). If no suffix is specified, the value is treated as a size in bytes. Default value: <i>(not specified)</i>. <code>--HeuristicAnalysis <On Off></code>—enable or disable the heuristic analysis during a scan. Default value: On. <code>--Exclude <path></code>—excluded path. The path can be relative and contain a file mask (with the following wildcards: ? and *, as well as character classes [], [!] and [^]). Optional parameter; can be set more than once. <code>--OnKnownVirus <action></code>—action to perform upon detection of a known threat by using the signature-based analysis. Allowed actions: REPORT, CURE, QUARANTINE, DELETE. Default value: REPORT. <code>--OnIncurable <action></code>—action to perform upon detection an incurable threat or when the curing action (CURE) has failed. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. <code>--OnSuspicious <action></code>—action to perform upon detection of a suspicious object using the heuristic analysis. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. <code>--OnAdware <action></code>—action to perform upon detection of adware. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. <code>--OnDialers <action></code>—action to perform upon detection of a dialer. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. <code>--OnJokes <action></code>—action to perform upon detection of joke software.



Command	Description
	Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. <code>--OnRiskware <action></code>—action to perform upon detection of riskware. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. <code>--OnHacktools <action></code>—action to perform upon detection of a hacktool. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT.  If a threat is detected in a file inside a container (an archive, an email message and so on), the container is quarantined (QUARANTINE) and not deleted (DELETE). <code>--stdin</code>—get the list of paths to be scanned from the standard input stream (<i>stdin</i>). Paths in the list must be separated with the new line character (<code>\n</code>). <code>--stdin0</code>—get the list of paths to scan from the standard input string (<i>stdin</i>). Paths in the list must be separated by the zero character NUL (<code>\0</code>).  When using <code>--stdin</code> and <code>--stdin0</code> options, the paths on the list should not contain patterns or regular expressions for a search. We recommend that you use the <code>--stdin</code> and <code>--stdin0</code> options to process a path list generated by an external utility, for example, <code>find</code> in the <code>scan</code> command (see Usage Examples).
<code>bootscan</code> <code><device> ALL</code>	Purpose: Start scanning boot records on specified disks using the file scan component Dr.Web File Checker. Both MBR and VBR records are scanned. Arguments <code><disk drive></code>—path to the block file of a disk device whose boot record you want to scan. You can specify several disk devices separated by spaces. The argument is mandatory. If <code>ALL</code> is specified instead of the device file, all boot records on all available disk devices will be checked. Options <code>-a [--Autonomous]</code>—run standalone instances of Dr.Web Scanning Engine and Dr.Web File Checker to perform the specified scan, shutting them down after it is completed.



Command	Description
	 Threats detected during standalone scanning will not be added to the common list of threats detected displayed by the <code>threats</code> command, and a centralized protection server will not be notified of them, if Dr.Web Industrial for Linux is controlled by it. <code>--Report <type></code>—type of the scan report. Allowed values: • BRIEF—brief report; • DEBUG—detailed report; • JSON—serialized report in the JSON format. Default value: BRIEF. <code>--ScanTimeout <time interval></code>—timeout for scanning one file in milliseconds. If the value is set to 0, scanning time is not limited. Default value: 0. <code>--HeuristicAnalysis <On Off></code>—enable or disable the heuristic analysis during a scan. Default value: On. <code>--Cure <Yes No></code>—attempt or do not attempt to cure detected threats. If the value is set to No, only a notification about a detected threat is displayed. Default value: No. <code>--ShellTrace</code>—display additional debug information when scanning a boot record
procscan	Purpose: Initiate scanning of executables containing the code of currently running system processes with the Dr.Web File Checker component. If a malicious executable file is detected, it is neutralized, and all processes run by this file are forced to terminate. Arguments: None. Options <code>-a [--Autonomous]</code>—run standalone instances of Dr.Web Scanning Engine and Dr.Web File Checker to perform the specified scan, shutting them down after it is completed.



Command	Description
	 Threats detected during standalone scanning will not be added to the common list of threats detected displayed by the <code>threats</code> command, and a centralized protection server will not be notified of them, if Dr.Web Industrial for Linux is controlled by it. <code>--Report <type></code>—type of the scan report. Allowed values: • BRIEF—brief report; • DEBUG—detailed report; • JSON—serialized report in the JSON format. Default value: BRIEF. <code>--ScanTimeout <time interval></code>—timeout for scanning one file in milliseconds. If the value is set to 0, scanning time is not limited. Default value: 0. <code>--PackerMaxLevel <number></code>—maximum nesting level while scanning packed objects. A packed object is executable code compressed with specialized software (UPX, PElOCK, PECompact, Petite, ASPack, Morphine and so on). Such objects may include other packed objects which may also include packed objects and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--HeuristicAnalysis <On Off></code>—enable or disable the heuristic analysis during a scan. Default value: On. <code>--ContainerMaxLevel <number></code>—maximum nesting level while scanning other types of objects inside which other objects are enclosed (HTML pages, .jar files and so on). The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--Exclude <path></code>—path to be excluded from scanning. The path can contain a file mask with the following allowed symbols: ? and *, as well as the symbol classes [], [!], [^]. The path (including the path with the file mask) must be absolute. Optional parameter; can be set more than once. <code>--OnKnownVirus <action></code>—action to perform upon detection of a known threat by using the signature-based analysis.



Command	Description
	Allowed actions: REPORT, CURE, QUARANTINE, DELETE. Default value: REPORT. --OnIncurable <i><action></i>—action to perform upon detection an incurable threat or when the curing action (CURE) has failed. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. --OnSuspicious <i><action></i>—action to perform upon detection of a suspicious object using the heuristic analysis. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. --OnAdware <i><action></i>—action to perform upon detection of adware. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. --OnDialers <i><action></i>—action to perform upon detection of a dialer. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. --OnJokes <i><action></i>—action to perform upon detection of joke software. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. --OnRiskware <i><action></i>—action to perform upon detection of riskware. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT. --OnHacktools <i><action></i>—action to perform upon detection of a hacktool. Allowed actions: REPORT, QUARANTINE, DELETE. Default value: REPORT.  If a threat is detected in an executable file, Dr.Web Industrial for Linux terminates all processes started by the file.
netscan [<i><path></i>]	Purpose: Start distributed scanning of the specified file or directory using the Dr.Web Network Checker agent for network data scanning. If there are no configured connections to other hosts that are running Dr.Web for Unix, then the scanning will be done only using the locally available scan engine (similar to the <code>scan</code> command). Arguments <i><path></i>—path to the file or directory to be scanned.



Command	Description
	If this argument is omitted, data from the stdin input stream will be scanned. Options <code>--Report <type></code>—type of the scan report. Allowed values: • BRIEF—brief report; • DEBUG—detailed report; • JSON—serialized report in the JSON format. Default value: BRIEF. <code>--ScanTimeout <time interval></code>—timeout for scanning one file in milliseconds. If the value is set to 0, scanning time is not limited. Default value: 0. <code>--PackerMaxLevel <number></code>—maximum nesting level while scanning packed objects. A packed object is executable code compressed with specialized software (UPX, PELock, PECompact, Petite, ASPack, Morphine and so on). Such objects may include other packed objects which may also include packed objects and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ArchiveMaxLevel <number></code>—maximum nesting level while scanning archives (.zip, .rar and so on) in which other archives may be enclosed, whereas these archives may also include other archives and so on. The value of this parameter specifies the nesting limit beyond which archives enclosed in other archives are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--MailMaxLevel <number></code>—maximum nesting level while scanning files of mailers (.pst, .tbb and so on) in which other files may be enclosed, whereas these files may also include other files and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ContainerMaxLevel <number></code>—maximum nesting level while scanning other types of objects inside which other objects are enclosed (HTML pages, .jar files and so on). The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped.



Command	Description
	Default value: 8. <code>--MaxCompressionRatio <ratio></code>—maximum compression ratio of scanned objects. The value must be no less than 2. Default value: 3000. <code>--MaxSizeToExtract <number></code>—maximum size for files enclosed in archives. Files which size is greater than the value of this parameter will be skipped when scanning. The size is specified as a number with a suffix (<i>b</i>, <i>kb</i>, <i>mb</i>, <i>gb</i>). If no suffix is specified, the value is treated as a size in bytes. Default value: <i>(not specified)</i>. <code>--HeuristicAnalysis <On Off></code>—enable or disable the heuristic analysis during a scan. Default value: On. <code>--Cure <Yes No></code>—attempt or do not attempt to cure detected threats. If the value is set to No, only a notification about a detected threat is displayed. Default value: No
<code>rawscan <path></code>	Purpose: Start “raw” scanning of the specified file or directory with Dr.Web Scanning Engine directly, without the use of Dr.Web File Checker.  Threats detected during “raw” scanning are not included in the list of detected threats that can be displayed using the <code>threats</code> command. It is recommended that you use this command only to debug the functioning of Dr.Web Scanning Engine. Note that the command outputs the “cured” status, if at least <i>one</i> threat is neutralized of those threats that are detected in a file (not <i>all</i> threats might be neutralized). Thus, it is <i>not recommended</i> to use this command if you need thorough file scanning. In the latter case it is recommended to use the <code>scan</code> command. Arguments <code><path></code>—path to the file or directory to be scanned. Options <code>--ScanEngine <path></code>—path to the Unix socket of Dr.Web Scanning Engine. If not specified, a standalone instance of the scan engine will be started (which will be shut down once the scanning is complete). <code>--Report <type></code>—type of the scan report.



Command	Description
	Allowed values: • BRIEF—brief report; • DEBUG—detailed report; • JSON—serialized report in the JSON format. Default value: BRIEF. <code>--ScanTimeout <time interval></code>—timeout for scanning one file in milliseconds. If the value is set to 0, scanning time is not limited. Default value: 0. <code>--PackerMaxLevel <number></code>—maximum nesting level while scanning packed objects. A packed object is executable code compressed with specialized software (UPX, PELock, PECompact, Petite, ASPack, Morphine and so on). Such objects may include other packed objects which may also include packed objects and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ArchiveMaxLevel <number></code>—maximum nesting level while scanning archives (.zip, .rar and so on) in which other archives may be enclosed, whereas these archives may also include other archives and so on. The value of this parameter specifies the nesting limit beyond which archives enclosed in other archives are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--MailMaxLevel <number></code>—maximum nesting level while scanning files of mailers (.pst, .tbb and so on) in which other files may be enclosed, whereas these files may also include other files and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ContainerMaxLevel <number></code>—maximum nesting level while scanning other types of objects inside which other objects are enclosed (HTML pages, .jar files and so on). The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--MaxCompressionRatio <ratio></code>—maximum compression ratio of scanned objects. Must be no less than 2. Default value: 3000.



Command	Description
	<code>--MaxSizeToExtract <number></code>—maximum size for files enclosed in archives. Files which size is greater than the value of this parameter will be skipped when scanning. The size is specified as a number with a suffix (<i>b</i>, <i>kb</i>, <i>mb</i>, <i>gb</i>). If no suffix is specified, the value is treated as a size in bytes. Default value: <i>(not specified)</i>. <code>--HeuristicAnalysis <On Off></code>—enable or disable the heuristic analysis during a scan. Default value: On. <code>--Cure <Yes No></code>—attempt or do not attempt to cure detected threats. If the value is set to No, only a notification about a detected threat is displayed. Default value: No. <code>--ListCleanItem</code>—output the list of clean (non-infected) files found inside the container that was scanned. <code>--ShellTrace</code>—enable display of additional debug information when scanning a file. <code>--Output <path to file></code>—duplicate the output of the command to the specified file
<code>remotescan</code> <code><host> <path></code>	Purpose: Start scanning the specified file or directory at the specified remote host having connected to it using <i>SSH</i> or <i>Telnet</i>.  Threats detected during remote scanning are not neutralized and are also not added to the list of detected threats displayed using the <code>threats</code> command. This function can be used only for detection of malicious and suspicious files on a remote host. To eliminate detected threats on the remote host, it is necessary to use administration tools provided directly by this host. For example, for routers, set-top boxes, and other “smart” devices, a mechanism for a firmware update can be used; for computing machines, it can be done by connecting to them (as an option, using a remote terminal mode) and by performing corresponding operations in their file system (file removal or moving and so on), or by running an anti-virus software installed on them. Arguments • <code><host></code>—IP address or a domain name of the remote host to be connected to for scanning. • <code><path></code>—path to the file or directory to be scanned (the path must be absolute).



Command	Description
	Options <code>-l [--Login] <name></code>—login (user name) used for authorization on the remote host via the selected protocol. If a user name is not specified, an attempt is made to connect to a remote host as the user who started the command. <code>-i [--Identity] <path to file></code>—private key file used for authentication of the specified user via the selected protocol.  The <code>remotescan</code> command is designed to scan SOHO (Small Office / Home Office) routers. A key in the format used by default by the <code>ssh-keygen</code> utility is not supported. To scan a remote host via SSH, a key in the PEM format is required. To generate the key, use the command: <pre>\$ ssh-keygen -t rsa -m PEM -f rsa_pem</pre> <code>-m [--Method] <SSH Telnet></code>—remote host connection method (protocol). If the method is not specified, SSH is used. <code>-p [--Port] <number></code>—number of the port on the remote host for connecting via the selected protocol. Default value: Default port for the selected protocol (22 for SSH, 23 for Telnet). <code>--UseChannels <number></code>—number of data transfer channels. Default value: 5. <code>--Password <password></code>—password used for authentication of a user via the selected protocol.  Password is passed as plain text. <code>--Report <type></code>—type of the scan report. Allowed values: • BRIEF—brief report; • DEBUG—detailed report; • JSON—serialized report in the JSON format. Default value: BRIEF. <code>--ScanTimeout <time interval></code>—timeout for scanning one file in milliseconds. If the value is set to 0, scanning time is not limited. Default value: 0.



Command	Description
	<code>--PackerMaxLevel <number></code>—maximum nesting level while scanning packed objects. A packed object is executable code compressed with specialized software (UPX, PELock, PECompact, Petite, ASPack, Morphine and so on). Such objects may include other packed objects which may also include packed objects and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ArchiveMaxLevel <number></code>—maximum nesting level while scanning archives (.zip, .rar and so on) in which other archives may be enclosed, whereas these archives may also include other archives and so on. The value of this parameter specifies the nesting limit beyond which archives enclosed in other archives are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--MailMaxLevel <number></code>—maximum nesting level while scanning files of mailers (.pst, .tbb and so on) in which other files may be enclosed, whereas these files may also include other files and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--ContainerMaxLevel <number></code>—maximum nesting level while scanning other types of objects inside which other objects are enclosed (HTML pages, .jar files and so on). The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. If the value is set to 0, nested objects are skipped. Default value: 8. <code>--MaxCompressionRatio <ratio></code>—maximum compression ratio of scanned objects. Must be no less than 2. Default value: 3000. <code>--MaxSizeToExtract <number></code>—maximum size for files enclosed in archives. Files which size is greater than the value of this parameter will be skipped when scanning. The size is specified as a number with a suffix (<i>b</i>, <i>kb</i>, <i>mb</i>, <i>gb</i>). If no suffix is specified, the value is treated as a size in bytes. Default value: <i>(not specified)</i>. <code>--HeuristicAnalysis <On Off></code>—enable or disable the heuristic analysis during a scan. Default value: On. <code>--Exclude <path></code>—path to be excluded from scanning. The path can contain a file mask with the following allowed symbols: ? and *, as well as



Command	Description
	the symbol classes [], [!], [^]. The path (including the path with the file mask) must be absolute. Optional parameter; can be set more than once. <code>--TransferListenAddress <address></code>—address for receiving files transferred from the remote device for scanning. Optional parameter. If not indicated, an arbitrary address is used. <code>--TransferListenPort <port></code>—port for receiving files transferred from the remote device for scanning. Optional parameter. If not indicated, an arbitrary port is used. <code>--TransferExternalAddress <address></code>—address for the remote device to send files for scanning. Optional parameter. If not indicated, the <code>--TransferListenAddress</code> option value or the outgoing address of the already established session is used. <code>--TransferExternalPort <port></code>—port to transfer files for scanning, specified for the remote device. Optional parameter. If not indicated, an automatically determined port is used. <code>--ForceInteractive</code>—use the SSH interactive session (only for SSH connections). <i>Optional parameter.</i>

9.2.3.2. Commands to Manage Detected Threats and Quarantine

The following commands for managing threats and quarantine are available:

Command	Description
<code>threats</code> <code>[<action> <object>]</code>	Purpose: Apply the specified action to earlier detected threats according to their identifiers. A type of the action is specified by the command option. If the action is not specified, displays information about detected but not neutralized threats. The information about threats is displayed according the format, specified using the non-mandatory <code>--Format</code> option. If the <code>--Format</code> option is not specified, the following information is displayed for each threat: • an identifier assigned to the threat (its ordinal number); • the full path to the infected file; • information about the threat (its name and type according to the classification of the Doctor Web company); • information about the file: its size, owner, time of last modification; • history of operations applied to an infected file: detection, applied actions and so on.



Command	Description
	Arguments: None. Options <code>--Format "<format string>"</code>—output information about threats in the specified format. The description of the format string is below.  If this option is specified together with any action option, it is ignored. <code>-f [--Follow]</code>—wait for new messages about new threats and display them once they are received (CTRL+C interrupts the waiting).  If this option is specified together with any action option, it is ignored. <code>--Cure <threat list></code>—attempt to cure the listed threats (threat identifiers are comma-separated); <code>--Quarantine <threat list></code>—quarantine the listed threats (threat identifiers are comma-separated); <code>--Delete <threat list></code>—delete the listed threats (threat identifiers are comma-separated); <code>--Ignore <threat list></code>—ignore the listed threats (threat identifiers are comma-separated). If you need to apply the action to all detected threats, specify <code>All</code> instead of <code><threat list></code>. For example, the command: <pre>\$ drweb-ctl threats --Quarantine All</pre> quarantines all detected malicious objects. <code>--Directory <list of directories></code>—output only threats detected in files in directories from <code><list of directories></code>.  If this option is specified together with any action option, it is ignored.
<code>quarantine</code> <code>[<action> <object>]</code>	Purpose: Apply an action to the specified object in quarantine. If the action is not specified, information about quarantined objects and their identifiers together with brief information about original files put in quarantine is displayed. Information about isolated objects is output according to a format specified with the optional <code>--Format</code> parameter. If the <code>--Format</code> parameter is not specified, the following information is output for every isolated (quarantined) object: • an identifier assigned to a quarantined object; • the original path to the file that was moved to quarantine;



Command	Description
	• the date of putting the file in quarantine; • information about the file: its size, owner, time of last modification; • information about the threat (name of the threat, threat type according to the classification used by the Doctor Web company). Arguments: None. Options <code>--Format "<format string>"</code>—display information about quarantined objects in the specified format. The description of format string is below.  If this option is specified together with any action option, it is ignored. <code>-f [--Follow]</code>—wait for new messages about new threats and display them once they are received (CTRL+C interrupts the waiting).  If this option is specified together with any action option, it is ignored. <code>-a [--Autonomous]</code>—run a standalone instance of the Dr.Web File Checker file scanning component to perform the specified quarantine action and shut down the component upon completion. This option can be used together with any options mentioned below. <code>--Discovery [<list of directories>,]</code> searches for quarantine directories in the specified list of directories and add them to the consolidated quarantine upon detecting a threat. If the <code><list of directories></code> is not specified, search for quarantine directories in the common locations of the file system (volume mounting points and user home directories). This option can be specified not only with the <code>-a (--Autonomous)</code> option (see above), but also with any options/actions listed below. Moreover, if the <code>quarantine</code> command is run in standalone instance mode, that is, with the <code>-a (--Autonomous)</code> option but without the <code>--Discovery</code> option, then it has the same effect as calling: <pre>quarantine --Autonomous --Discovery</pre> <code>--Delete <object></code>—delete the specified quarantined object.  Quarantined objects are deleted permanently—this action is irreversible. <code>--Restore <object></code>—restore the specified object from the quarantine to its original location.



Command	Description
	 This command may require to run <code>drweb-ctl</code> with superuser (the <i>root</i> user) privileges. You can restore the file from quarantine even if it is infected. <code>--Cure <object></code>—attempt to cure the specified object in the quarantine.  Even if the object was successfully cured, it will remain in quarantine. To restore the cured object from quarantine, use the <code>--Restore</code> option. <code>--TargetPath <path></code>—restore an object from quarantine to the specified location: either as a file with the specified name (if <i><path></i> is a path to a file), or to the specified directory (if <i><path></i> is a path to a directory). A path can be absolute or relative (with regard to the current directory).  This option can only be used in combination with the <code>--Restore</code> option. As an <i><object></i>, specify the object identifier in quarantine. To apply the action to all quarantined objects, specify <code>All</code> instead of <i><object></i>. For example, the command <pre>\$ drweb-ctl quarantine --Restore All --TargetPath test</pre> restores all quarantined objects and puts them in the <code>test</code> subdirectory located in the current directory from which the <code>drweb-ctl</code> command was run.  If the <code>--Restore All</code> variant is indicated together with the additional option <code>--TargetPath</code>, this option must set a path to a directory, not to a file.

Formatted output for threats and quarantine commands

The output format is defined using the format string specified as the optional argument `--Format`. The format string must be put in quotes. The format string can include common symbols (displayed “as is”), as well as special markers which will be replaced with corresponding information at the output. The following markers are available:

1. Common for `threats` and `quarantine` commands:

Marker	Description
<code>%{n}</code>	New line



Marker	Description
<code>%{t}</code>	Tabulation
<code>%{threat_name}</code>	The name of the detected threat according to the classification of the Doctor Web company
<code>%{threat_type}</code>	Threat type ("known virus" and so on) according to Doctor Web classification
<code>%{size}</code>	Original file size
<code>%{origin}</code>	The full name of the original file with path
<code>%{path}</code>	Synonym of <code>%{origin}</code>
<code>%{ctime}</code>	Modification date/time of the original file in "%Y-%b-%d %H:%M:%S" format (for example, "2018-Jul-20 15:58:01")
<code>%{timestamp}</code>	Similar to <code>%{ctime}</code> , but in the <i>Unix timestamp</i> format
<code>%{owner}</code>	The original file owner
<code>%{rowner}</code>	The remote owner of the original file (if not applicable or value is unknown it is replaced with ?)

2. Specific for `threats` command:

Marker	Description
<code>%{hid}</code>	The identifier of the threat record in the history of events associated with the threat
<code>%{tid}</code>	Threat identifier
<code>%{htime}</code>	Date/time of the event related to the threat
<code>%{app}</code>	The identifier of the Dr.Web Industrial for Linux component which processed a threat
<code>%{event}</code>	The latest event related to a threat: • FOUND—threat was detected; • CURE—threat was cured; • QUARANTINE—file with a threat was quarantined; • DELETE—file with a threat was deleted; • IGNORE—threat was ignored; • RECAPTURED—threat was detected by another component
<code>%{err}</code>	Error message text (if no error has occurred, the text is replaced with an empty string)



3. Specific for quarantine command:

Marker	Description
<code>%{qid}</code>	The identifier of the quarantined object
<code>%{qtime}</code>	Date/time of moving the object to quarantine
<code>%{curetime}</code>	Date/time of curing attempt of the quarantined object (if not applicable or the value is unknown, it is replaced with ?)
<code>%{cureres}</code>	The result of the quarantined object curing attempt: • <code>cured</code>—threat was cured; • <code>not cured</code>—threat was not cured or no curing attempts were made

Example

```
$ drweb-ctl quarantine --Format "{%{n} %{origin}: %{threat_name} - %{qtime}%{n}}"
```

This command displays quarantine contents as records of the following type:

```
{  
  <path to file>: <threat name> - <date of putting in quarantine>  
}  
...
```

9.2.3.3. Configuration Management Commands

The following commands to manage configuration are available:

Command	Description
<code>cfset</code> <code><section> . <parameter> <value></code>	Purpose: Change the active value of the specified parameter in the current configuration of Dr.Web Industrial for Linux. Arguments • <code><section></code>—name of the configuration file section which provides the parameter. This argument is mandatory. • <code><parameter></code>—name of the parameter to be changed. This argument is mandatory. • <code><value></code>—new parameter value. This argument is mandatory.



Command	Description
	 To specify a parameter value, the format <code><section>.<parameter> <value></code> is always used, the assignment character <code>=</code> is not used. If you want to indicate several parameter values, you need to repeatedly call the <code>cfset</code> command, as many times as the number of parameter values you want to add. To add a new value to the list of parameter values, you need to use the <code>-a</code> option (see below). You cannot specify the string <code><parameter> <value 1>, <value 2></code> as an argument, because the string <code>"<value 1>, <value 2>"</code> will be considered one value of <code><parameter></code>. For description of the configuration file, refer to the section Appendix D. Dr.Web Industrial for Linux Configuration File, as well as the documentation displayed upon running <code>man 5 drweb.ini</code>. Options <code>-a [--Add]</code>—do not substitute the current parameter value but add the specified value to the list (allowed only for parameters that can accept a list of values). This option should also be used for adding new parameter groups with a tag. <code>-e [--Erase]</code>—do not substitute the current parameter value but remove the specified value from the list (allowed only for parameters that can have several values, specified as a list). <code>-r [--Reset]</code>—reset the parameter value to the default. At that, <code><value></code> is not required in the command and is ignored if specified. Options are not mandatory. If they are not specified, then the current parameter value (including a list of values) are substituted with the specified value. If you use the <code>-r</code> option for sections that contain individualized parameter settings for , the parameter value in the individualized settings section will be changed to the value of its corresponding "parent" parameter in the component settings section.



Command	Description
	 This command requires <code>drweb-ctl</code> to be started with superuser (the <code>root</code> user) privileges. If necessary, use the <code>su</code> or <code>sudo</code> commands.
<code>cfshow</code> [<code><section></code> [. <code><parameter></code>]]	Purpose: Display parameters of the current configuration of Dr.Web Industrial for Linux. The command to display parameters is specified as follows: <code><section>.<parameter> = <value></code>. Sections and parameters of non-installed components are not displayed by default. Arguments • <code><section></code>—name of the configuration file section parameters of which are to be displayed. The argument is optional. If not specified, parameters of all configuration file sections are displayed. • <code><parameter></code>—name of the displayed parameter. Optional argument. If not specified, all parameters of the section are displayed. Otherwise, only this parameter is displayed. If a parameter is specified without the section name, all parameters with this name from all of the configuration file sections are displayed. Options --Uncut—display all configuration parameters, and not only those used with the currently installed set of components. If the option is not specified, only parameters used by the installed components are displayed. --Changed—display only those parameters whose values differ from the default ones. --Ini—display parameter values in the <code>.ini</code> file format: at first, the section name is specified in square brackets, then the section parameters listed as <code><parameter> = <value></code> pairs (one pair per line). --Value—output only the value of the specified parameter. The <code><parameter></code> argument is mandatory in this case.
<code>reload</code>	Purpose: Reload the configuration of Dr.Web Industrial for Linux. For that purpose, the Dr.Web ConfigD configuration management daemon performs the following actions: • rereads the configuration and notifies all Dr.Web Industrial for Linux components about its changes; • reopens the Dr.Web Industrial for Linux log;



Command	Description
	• starts the components that use virus databases (including the scanning engine); • attempts to start those components that were shut down abnormally. Arguments: None. Options: None

9.2.3.4. Advanced Commands

In this section

- [Commands to Manage Updates and Operation in Centralized Protection Mode](#)
- [Information Commands](#)

9.2.3.4.1. Commands to Manage Updates and Operation in Centralized Protection Mode

The following commands for managing updates are available, as well as commands for operation in the centralized protection mode:

Command	Description
update	Purpose: Start the updating process of anti-virus components (virus databases, the scan engine and so on, depending on the distribution) from Doctor Web update servers, terminate the updating process if it is already running, or perform rollback of the latest update to the previous versions of updated files.  The command has no effect if Dr.Web Industrial for Linux is connected to the centralized protection server. Arguments: None. Options --Stop—terminate the running update process. --Rollback—roll back the last update and restore the previous version of the files that have been updated during the last update. --From <path>—apply updates offline from a specified directory. --Path <path>—store files for updating offline in a specified directory. If this directory already has files, then they will be updated.



Command	Description
<code>esconnect</code> <code><server> [: <port>]</code>	Purpose: Connect Dr.Web Industrial for Linux to the specified centralized protection server. For details on the operation modes, refer to the Operation Modes section. Arguments • <code><server></code>—IP address or network name of the host on which the centralized protection server is operating. This argument is mandatory. • <code><port></code>—port number used by the centralized protection server. The argument is optional and should be specified only if the centralized protection server uses a non-standard port. Options <code>--Certificate <path></code>—file path to a certificate of the centralized protection server, the connection to which will be established. <code>--Login <ID></code>—login (workstation identifier) used for connection to the centralized protection server. <code>--Password <password></code>—password for connection to the centralized protection server. <code>--Compress <On Off></code>—enable (On) or disable (Off) forced compression of transmitted data. If not specified, usage of compression is determined by the server. <code>--Encrypt <On Off></code>—enable (On) or disable (Off) forced encryption of transmitted data. If not specified, usage of encryption is determined by the server. <code>--Newbie</code>—connect as a “newbie” (get a new account on the server). <code>--Group <ID></code>—identifier of the group to which the workstation is added on connection. Must be specified together with the <code>--Password</code> option. <code>--Rate <ID></code>—identifier of the tariff group applied to your workstation when it is included in one of the centralized protection server groups. Must be specified together with the <code>--Group</code> option. <code>--CfgFile <path></code>—connect to the centralized protection server using the configuration file with connection settings.  This command requires <code>drweb-ctl</code> to be started with superuser (the <code>root</code> user) privileges. If necessary, use the <code>su</code> or <code>sudo</code> commands.
<code>esdisconnect</code>	Purpose: Disconnect Dr.Web Industrial for Linux from the centralized protection server and switch it to a standalone mode.  The command has no effect if Dr.Web Industrial for Linux already operates in standalone mode.



Command	Description
	Arguments: None. Options: None.  This command requires <code>drweb-ctl</code> to be started with superuser (the <i>root</i> user) privileges. If necessary, use the <code>su</code> or <code>sudo</code> commands.

9.2.3.4.2. Information Commands

The following information commands are available:

Command	Description
<code>appinfo</code>	Purpose: Output information about active Dr.Web Industrial for Linux components. The following information is output for each running component: - internally used name; - GNU/Linux process identifier (PID); - state (running, stopped and so on); - error code, if the component has been terminated owing to an error; - additional information (optional); For the configuration daemon (<code>drweb-configd</code>), the following is output as additional information: - the list of installed components—<i>Installed</i>; - the list of components which must be run by the configuration daemon—<i>Should run</i>. Arguments: None. Options <code>-f [--Follow]</code>—wait for new messages on module status change and display them once such a message is received (CTRL+C interrupts waiting)
<code>baseinfo</code>	Purpose: Display the information on the current version of the scan engine and status of virus databases. The following information is displayed: - version of the scan engine; - release date and time of the virus databases being used; - the number of available threat records;



Command	Description
	• the time of the last successful update of the virus databases and of the scan engine; • the time of the next scheduled automatic update. Arguments: None. Options <code>-l [--List]</code>—display the full list of loaded files of virus databases and a number of threat records in each file
events	Purpose: Display Dr.Web Industrial for Linux events. In addition, this command allows you to manage the events (mark them as read or delete them). Arguments: None. Options <code>--Report <type></code>—type of the event report. Allowed values: • BRIEF—brief report; • DEBUG—detailed report; • JSON—serialized report in the JSON format. <code>-f [--Follow]</code>—wait for new events and display them upon their occurrence (CTRL+C interrupts waiting). <code>--ShowSeen</code>—display already read events as well; <code>-s [--Since] <date, time></code>—show the events that occurred before the specified timestamp (<date, time> is specified as "YYYY-MM-DD hh:mm:ss"). <code>-u [--Until] <date, time></code>—show the events that occurred no later than the specified timestamp (<date, time> is specified as "YYYY-MM-DD hh:mm:ss"). <code>-t [--Types] <type list></code>—show the events of the specified types only (types are comma-separated). The following event type is available: UnexpectedAppTermination—unexpected component shutdown. To view all types of events, use All. <code>--Show <list of events></code>—display the listed events (event identifiers are comma-separated); <code>--Delete <list of events></code>—remove the listed events (event identifiers are comma-separated); <code>--MarkAsSeen <list of events></code>—mark the listed events as read (event identifiers are comma-separated).



Command	Description
	If you want to mark as “read” or delete all events, specify <code>All</code> instead of <code><events list></code>. For example, the command <pre>\$ drweb-ctl events --MarkAsSeen All</pre> will mark all existing events as “read”
<code>report <type></code>	Purpose: Create a report on Dr.Web Industrial for Linux events in the HTML format (the page body is output to the specified file). Arguments <code><type></code>—event type that required reporting (indicate one type). See allowed values in the <code>--Types</code> option description of the <code>events</code> command. A mandatory argument. Options <code>-o [--Output] <path to file></code>—save the report to the specified file. The option is mandatory. <code>-s [--Since] <date, time></code>—report events that occurred no earlier than the specified timestamp (<code><date, time></code> is specified as “YYYY-MM-DD hh:mm:ss”). <code>-u [--Until] <date, time></code>—report events that occurred no later than the specified timestamp (<code><date, time></code> is specified as “YYYY-MM-DD hh:mm:ss”). <code>--TemplateDir <path to directory></code>—path to the directory that contains HTML report templates. Options <code>-s</code>, <code>-u</code>, and <code>--TemplateDir</code> are not mandatory.
<code>license</code>	Purpose: Display the information about the currently active license or get the key file for a license that has already been registered (for example, that has been registered on the company website). If no options are specified, then the following information is output (if you are using a license for the standalone mode): • a license number, • date and time when the license expires. If you are using a license provided to you by a centralized protection server (for the use of the product in the centralized protection mode or mobile mode), the corresponding message is output. Arguments: None. Options <code>--GetRegistered <serial number></code>—get a license key file for the specified serial number, if the conditions for the provision of a new key file have not been breached (for example, breached by



Command	Description
	using the product not in centralized protection mode, when the license is managed by a centralized protection server). <code>--NetworkTimeout <time interval></code>—timeout in milliseconds for network operations during the use of the <code>license</code> command. This parameter is used to continue activation when the connection is temporarily lost. If the connection is re-established before the timeout expires, the activation will be resumed. If 0 is specified, then there is no timeout. Default value: 0. <code>--Proxy http://<username>:<password>@<server address>:<port></code>—get a license key via the proxy server (used only with the <code>--GetRegistered</code> option). <i>The serial number must be first registered at the company website.</i> For further information about licensing Dr.Web products, refer to the Licensing section.  To register a serial number, an internet connection is required.
<code>log</code>	Purpose: Display the latest log records of Dr.Web Industrial for Linux in the console (the <code>stdout</code> stream, similar to the <code>tail</code> command). Arguments: None. Options <code>-s [--Size] <number></code>—number of the latest log records to be displayed on the screen. <code>-c [--Components] <components list></code>—list of component identifiers whose records are displayed. Identifiers are space-separated. If no argument is defined, all available records logged by all components are displayed. Actual identifiers of the installed components (e.g. internal component names displayed in the log) can be displayed using the <code>appinfo</code> command. <code>-f [--Follow]</code>—wait for new log records and display them once they are received (CTRL+C interrupts waiting).  This command requires <code>drweb-ctl</code> to be started with superuser (usually the <code>root</code> user) privileges. If necessary, use the <code>su</code> or <code>sudo</code> commands.



Command	Description
stat	Purpose: Display statistics about the operation of components that process files or about the operation of the network data scanning agent Dr.Web Network Checker (press CTRL+C or Q to interrupt displaying the statistics). The statistics output includes: • a name of the component that initiated file scanning; • component PID; • an average number of files processed per second during the last minute, 5 minutes, 15 minutes; • a percentage of using the cache of the scanned files; • an average number of scan errors per second. For the distributed scanning agent, the following information is displayed: • a list of local clients that initiated scanning; • a list of remote hosts that received files for scanning; • a list of remote hosts that sent files for scanning. For local clients of the distributed scanning agent, their PID and name are specified; for remote clients—an address and port of the host. For both clients—local and remote—the following information is displayed: • an average number of files scanned per second; • an average number of sent and received bytes per second; • an average number of errors per second. Arguments: None. Options -n [--Netcheck]—display statistics on operation of the network data scanning agent

9.2.4. Usage Examples

In this section

- [Scanning objects](#)
 - [Simple scanning commands](#)
 - [Scanning of files selected by criteria](#)
 - [Scanning of additional objects](#)
- [Configuration management](#)
- [Threat management](#)



- [Example of operation in standalone instance mode](#)
- [Updating offline](#)

Scanning objects

Simple scanning commands

1. Perform scanning of the `/home` directory with default parameters:

```
$ drweb-ctl scan /home
```

2. Scan file paths listed in the `daily_scan` file (one path per line):

```
$ drweb-ctl scan --stdin < daily_scan
```

3. Perform scanning of the boot record on the `sda` drive:

```
$ drweb-ctl bootscan /dev/sda
```

4. Perform scanning of the running processes:

```
$ drweb-ctl procscan
```

Scanning of files selected by criteria

Examples for file selection for scanning are listed below and use the result of the `find` utility operation. The obtained list of files is sent to the `drweb-ctl scan` [command](#) with the `--stdin` or `--stdin0` parameter.

1. Scan listed files returned by the `find` utility and separated with the NUL (`\0`) character:

```
$ find -print0 | drweb-ctl scan --stdin0
```

2. Scan all files in all directories, starting from the root directory, on one partition of the file system:

```
$ find / -xdev -type f | drweb-ctl scan --stdin
```

3. Scan all files in all directories, starting from the root directory, with the exception of the `/var/log/messages` and `/var/log/syslog` files:

```
$ find / -type f ! -path /var/log/messages ! -path /var/log/syslog | drweb-ctl scan --stdin
```

4. Scan all files of the `root` user in all directories, starting from the root directory:

```
$ find / -type f -user root | drweb-ctl scan --stdin
```

5. Scan all files of the `root` and `admin` users in all directories, starting from the root directory:

```
$ find / -type f \( -user root -o -user admin \) | drweb-ctl scan --stdin
```

6. Scan all files of the users with UID within the range of 1000–1005 in all directories, starting from the root directory:

```
$ find / -type f -uid +999 -uid -1006 | drweb-ctl scan --stdin
```

7. Scan files in all directories, starting from the root directory, with a nesting level of no more than five:

```
$ find / -maxdepth 5 -type f | drweb-ctl scan --stdin
```



8. Scan files in a root directory while ignoring files in subdirectories:

```
$ find / -maxdepth 1 -type f | drweb-ctl scan --stdin
```

9. Scan files in all directories, starting from the root directory, while following all symbolic links:

```
$ find -L / -type f | drweb-ctl scan --stdin
```

10. Scan files in all directories, starting from the root directory, without following symbolic links:

```
$ find -P / -type f | drweb-ctl scan --stdin
```

11. Scan files created no later than May 1, 2017 in all directories, starting from the root directory:

```
$ find / -type f -newermt 2017-05-01 | drweb-ctl scan --stdin
```

Scanning of additional objects

Scan objects located in the `/tmp` directory on the remote host `192.168.0.1` by connecting to it via SSH as the user `user` with the password `passw`:

```
$ drweb-ctl remotescan 192.168.0.1 /tmp --Login user --Password passw
```

Configuration management

1. Display information about the running components of Dr.Web Industrial for Linux:

```
$ drweb-ctl appinfo
```

2. Display all parameters of the `[Root]` section:

```
$ drweb-ctl cfshow Root
```

3. Set `No` as the value of the `Start` parameter in the `[LinuxSpider]` section of the active configuration (this will disable `SplDer Guard`):

```
# drweb-ctl cfset LinuxSpider.Start No
```

Superuser privileges are required to perform this action. To elevate the privileges, you can use the `sudo` command:

```
$ sudo drweb-ctl cfset LinuxSpider.Start No
```

4. Force update of anti-virus components of Dr.Web Industrial for Linux:

```
$ drweb-ctl update
```

5. Restart the component configuration of Dr.Web Industrial for Linux:

```
# drweb-ctl reload
```

Superuser privileges are required to perform this action. To elevate the privileges, you can use the `sudo` command:

```
$ sudo drweb-ctl reload
```

6. Connect Dr.Web Industrial for Linux to a [centralized protection](#) server operating on host `192.168.0.1` if a server certificate is stored in the `/home/user/cscert.pem` file:

```
$ drweb-ctl esconnect 192.168.0.1 --Certificate /home/user/cscert.pem
```

7. Connect Dr.Web Industrial for Linux to the [centralized protection](#) server using the `install.cfg` configuration file:



```
$ drweb-ctl esconnect --CfgFile <path to install.cfg>
```

8. Disconnect Dr.Web Industrial for Linux from the centralized protection server:

```
# drweb-ctl esdisconnect
```

Superuser privileges are required to perform this action. To elevate the privileges, you can use the `sudo` command:

```
$ sudo drweb-ctl esdisconnect
```

9. View the last log records made by the `drweb-update` and `drweb-configd` components in the Dr.Web Industrial for Linux log:

```
# drweb-ctl log -c Update ConfigD
```

Threat management

1. Display information on detected threats:

```
$ drweb-ctl threats
```

2. Quarantine all files containing non-neutralized threats:

```
$ drweb-ctl threats --Quarantine All
```

3. Display the list of quarantined files:

```
$ drweb-ctl quarantine
```

4. Restore all quarantined files:

```
$ drweb-ctl quarantine --Restore All
```

Example of operation in standalone instance mode

Scan files and process quarantine in standalone instance mode:

```
$ drweb-ctl scan /home/user -a --OnKnownVirus=QUARANTINE  
$ drweb-ctl quarantine -a --Delete All
```

The first command will scan files in the `/home/user` directory in standalone instance mode. Files containing known threats will be quarantined. The second command will process quarantine content (in standalone instance mode as well) and remove all quarantined objects.

Updating offline

In highly secure environments where internet connection is blocked or limited, it is possible to update virus bases offline. You need to download updates to a computer connected to the internet, copy them to a USB drive or local network share and then install them to another computer (which is not connected to the internet).

The update procedure must run in the command line.

To get updates

1. Run the [command](#) on a computer connected to the internet:



```
$ drweb-ctl update --Path <path to the directory to store updates>
```

2. Copy the downloaded updates to a USB drive or a local network share.
3. Mount the local network share or removable drive on the computer to be updated. If the updates are from the USB drive, run the commands:

```
# mkdir /mnt/usb  
# mount <path to device> /mnt/usb
```

4. Install the updates by running the command:

```
$ drweb-ctl update --From /mnt/usb
```

9.2.5. Configuration Parameters

The Dr.Web Ctl command-line management tool does not have its own parameter section in the unified [configuration file](#) of Dr.Web Industrial for Linux. The tool uses the parameters specified in the [Root] [section](#).



9.3. SplDer Guard



This component is included only in the distributions designed for the OSes of the GNU/Linux family.

The SplDer Guard file system monitor is designed for monitoring file activity on GNU/Linux file system volumes. The component operates as a resident monitor and controls main file system events related to file modification (creating, opening, closing). When such an event is intercepted, the monitor checks whether the file was modified and, if so, the module generates a task for the [Dr.Web File Checker](#) file scanning component to scan the modified file with [Dr.Web Scanning Engine](#).

Moreover, the SplDer Guard file system monitor detects attempts to run executable files. If a program in an executable file is considered malicious during scanning, all processes started from this file will be forcibly terminated.

9.3.1. Operating Principles

In this section

- [General information](#)
- [Defining file system areas to be monitored](#)
- [Enhanced file monitoring mode](#)

General information

The SplDer Guard file system monitor operates in user space (*user mode*) using the fanotify system mechanism. It is recommended that you use the *automatic mode* (Auto), which will allow the component to determine and use the best operation mode at startup, because not all Linux kernel versions support fanotify used by the monitor. If the component cannot support the specified integration mode, the component exits after startup. If the auto mode is selected, the component attempts to use the fanotify mode. If this mode can be used, the component shuts down.

Once new or modified files are detected, the monitor sends a task to the [Dr.Web File Checker](#) component to scan these files. The component then initiates their scanning by [Dr.Web Scanning Engine](#). The operation scheme is shown in the picture below. When operating via the fanotify system mechanism, the monitor can block access to files (of all types of files or only executable files—PE, ELF, scripts with the #! preamble) that are not scanned yet until they are scanned (see [below](#)).



SplDer Guard automatically detects mounting and unmounting new file system volumes (for example, on USB flash drives, CD/DVD, RAID arrays, and so on) and adjusts the list of monitored objects, if necessary.

Defining file system areas to be monitored

To optimize file system scanning, SplDer Guard controls requests only to those files that are in the file system scopes specified in the configuration. Each scope is defined as a path to some directory of the file system tree and is called a *protected space*. A set of all protected spaces forms a single *monitoring scope* controlled by the monitor. Besides the monitoring scope, you can specify a set of file system directories to be excluded from monitoring in the component settings (*exclusion scope*). If you did not specify any protected space in the component settings, the monitoring scope covers the entire file system tree. Thus, only those files are monitored which paths are covered by the monitoring scope and are not covered by the exclusion scope.

Specifying exclusion can be useful when, for example, some files are frequently modified, which results in constant repeated scanning of these files thus increasing the system load. If it is known with certainty that frequent modification of files in a directory is not caused by a malicious program but is due to operation of a trusted program, you can add the path of this directory or files modified in it to the list of exclusions. In this case, the SplDer Guard file system monitor stops responding to modification of these objects, even if they are covered by the monitoring scope. Moreover, you can add the program processing the files to the list of trusted programs (the `ExcludedProc` configuration parameter). In this case, file operations of this program will not result in scanning even if they are covered by the monitoring scope. Similarly, if necessary, you can disable monitoring and scanning of files from other file systems that are mounted on the local file system (for example, external file server directories mounted via CIFS). To specify file systems which files should not be scanned, use the `ExcludedFilesystem` parameter.

Protected spaces, as parts of the monitoring scope with scan parameters specified for them, are set in the component settings as named sections, which names contain a unique identifier assigned to the protected space. Each section describing a space contains the `Path` parameter that defines a path in the file system storing directories of this protected space (i.e. the file system tree fragment that is monitored within this space) and the `ExcludedPath` parameter that defines a local (with respect to `Path`) exclusion scope inside the protected space. The `ExcludedPath` parameter can contain standard file masks (i.e. `*` and `?` characters). Besides local exclusion scopes, you can also specify a global exclusion scope by using the `ExcludedPath` parameter specified outside the sections describing protected spaces. All directories covered by this scope, including the directories of protected spaces, are excluded from monitoring. Only global and individual exclusion scopes can be applied to each protected space: if a space is nested in another, the exclusion settings specified for the enclosing space are not applied to the nested space. In addition, each protected scope settings have the `Enable` boolean parameter which determines whether the files covered by this space are monitored. If this parameter is set to `No`, the contents of this space is not monitored. Moreover, the protected space is not monitored if the `Path` parameter has an empty value.



If all protected spaces specified in the monitor settings are not monitored or their paths are not specified, SplDer Guard is running idle because none of the files of the file system tree are monitored. If you want to monitor the file system as a single protected space, remove all named protected space sections from the settings.

Consider an example of configuring monitor and exclusion scopes. Suppose the following parameters are set in the component settings:

```
[LinuxSpider]
ExcludedPath = /directory1/tmp
...

[LinuxSpider.Space.space1]
Path = /directory1
ExcludedPath = "*.tmp"
...

[LinuxSpider.Space.space2]
Path = /directory1/directory2
...

[LinuxSpider.Space.space3]
Path = /directory3
Enable = No
...
```

This means that the files in the `/directory1` directory and its subdirectories, except the `/directory1/tmp` directory, are monitored. Moreover, the files which full names match the `/directory1/*.tmp` mask are not monitored (except the `/directory1/directory2` nested scope to which this mask is not applied despite the fact that the scope is nested in the `space1` protected space). Files in the `/directory3` directory are not monitored.

Enhanced file monitoring mode

SplDer Guard can use three monitoring modes:

- *Regular* (set by default)—monitors file access operations (creation, opening, closing, and running). Scanning of a file, access to which has been allowed, is requested. If a threat is detected upon the scan, the action to neutralize the threat can be applied to the file. Applications are allowed to access the file until the file scanning is finished.
- *Enhanced control of executable files*—monitor files considered non-executable as in regular mode. SplDer Guard blocks access to an executable file until its scanning is finished.



Executable files are binary files of PE and ELF formats, as well as text script files containing the `"#!"` preamble.

- *"Paranoid" mode*—SplDer Guard blocks access to any file until its scanning is finished.

Dr.Web File Checker stores file scan results in specialized cache for a certain time, so reaccessing the same file does not lead to rescanning it if there is information in the cache; the result extracted from the cache is therefore displayed as the scan result. Despite this, the use of the "paranoid" monitoring mode leads to a significant slowdown in accessing files.



To configure the monitoring mode, change the `BlockBeforeScan` parameter value in the component [settings](#).

9.3.2. Command-Line Arguments

To start the SplDer Guard component from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-spider [<parameters>]
```

SplDer Guard accepts the following parameters:

Parameter	Description
<code>--help</code>	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: <code>-h</code> Arguments: None
<code>--version</code>	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: <code>-v</code> Arguments: None

Example:

```
$ /opt/drweb.com/bin/drweb-spider --help
```

This command outputs short help information about the SplDer Guard component.

Startup notes

The component cannot be started directly from the command line in standalone mode. The component is started automatically by the [Dr.Web ConfigD](#) configuration management daemon at the startup of the operating system. To manage the operation parameters of the component, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line.



To start the Dr.Web Ctl tool, run the `drweb-ctl` [command](#).

To get documentation on this component from the command line, run the `man 1 drweb-spider` command.

9.3.3. Configuration Parameters

In this section

- [Component parameters](#)



- [Customizing protected space individual monitoring settings](#)

The component uses configuration parameters specified in the [LinuxSpider] section of the unified [configuration file](#) of Dr.Web Industrial for Linux.

Component parameters

The section contains the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component. If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the [Root] section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-spider</code>
<code>Start</code> <i>{boolean}</i>	The component is started by the Dr.Web ConfigD configuration management daemon. Setting this parameter to <code>Yes</code> instructs the configuration management daemon to start the component immediately, and setting this parameter to <code>No</code> —to shut down the component immediately. Default value: Depends on the Dr.Web product as part of which the component is supplied.
<code>[*] ExcludedPath</code> <i>{path to file or directory}</i>	Path to an object (file or directory) to be excluded from file monitoring. Either an individual file or an entire directory can be specified. If a directory is specified, all files and subdirectories (including nested ones) will be skipped. You can use file masks (containing characters <code>?</code> and <code>*</code> as well as character classes <code>[]</code> , <code>[!]</code> and <code>[^]</code>). Multiple values can be specified as a list. List values must be comma-separated and put in quotation marks. The parameter can be specified more than once in the section (in this case, all its values are combined into one list). Example: Add the <code>/etc/file1</code> file and the <code>/usr/bin</code> directory to the list.



Parameter	Description
	- Adding the values using the <code>drweb-ctl cfset</code> command:<pre># drweb-ctl cfset LinuxSpider.ExcludedPath -a /etc/file1 # drweb-ctl cfset LinuxSpider.ExcludedPath -a /usr/bin</pre> - Adding values to the configuration file. - Two values per line:<pre>[LinuxSpider] ExcludedPath = "/etc/file1", "/usr/bin"</pre> - Two lines (one value per line):<pre>[LinuxSpider] ExcludedPath = /etc/file1 ExcludedPath = /usr/bin</pre> To apply the changes, reload the Dr.Web Industrial for Linux configuration by running the command: <pre># drweb-ctl reload</pre>  There is no point in providing paths to symbolic links here as only a direct path to a file is analyzed while scanning it. Default value: <code>/proc, /sys</code>
Mode <i>{FANOTIFY AUTO}</i>	SplDer Guard operation mode. Allowed values: - FANOTIFY—use the <i>fanotify</i> monitoring interface; - AUTO—select an optimal operation mode automatically. Default value: AUTO
ExcludedProc <i>{path to file or path list}</i>	List of processes which file activity is not monitored. If a file operation was initiated by one of the processes specified in the parameter value, the modified or created file will not be scanned. Multiple values can be specified as a list. List values must be comma-separated and put in quotation marks. The parameter can be specified more than once in the section (in this case, all its values are combined into one list). You can use file masks (containing characters <code>?</code> and <code>*</code> as well as character classes <code>[]</code>, <code>[!]</code> and <code>[^]</code>). Example: Add the <code>wget</code> and <code>curl</code> processes to the list.



Parameter	Description
	- Adding the values using the <code>drweb-ctl cfset</code> command:<pre># drweb-ctl cfset LinuxSpider.ExcludedProc -a /usr/bin/wget # drweb-ctl cfset LinuxSpider.ExcludedProc -a /usr/bin/curl</pre> - Adding values to the configuration file. - Two values per line:<pre>[LinuxSpider] ExcludedProc = "/usr/bin/wget", "/usr/bin/curl"</pre> - Two lines (one value per line):<pre>[LinuxSpider] ExcludedProc = /usr/bin/wget ExcludedProc = /usr/bin/curl</pre> To apply the changes, reload the Dr.Web Industrial for Linux configuration by running the command: <pre># drweb-ctl reload</pre> Default value: <i>(not specified)</i>
<code>BlockBeforeScan</code> <i>{Off Executables All}</i>	Block files while being accessed until they are scanned by the monitor (an enhanced or "paranoid" monitoring mode). Allowed values: <code>Off</code>—do not block access to files even if they were not scanned. <code>Executables</code>—block access to executable files (PE and ELF files and scripts containing the <code>#!</code> preamble) not scanned by the monitor. <code>All</code>—block access to all files not scanned by the monitor. Files are blocked only in <code>FANOTIFY</code> mode. Default value: <code>Off</code>
<code>ExcludedFilesystem</code> <i>{file system name}</i>	File system accessing the files of which will not be monitored. This option is available only in <code>FANOTIFY</code> mode. Multiple values can be specified as a list. List values must be comma-separated and put in quotation marks. The parameter can be specified more than once in the section (in this case, all its values are combined into one list). Example: Add the <code>cifs</code> and <code>nfs</code> file systems to the list.



Parameter	Description
	- Adding the values using the <code>drweb-ctl cfset</code> command:<pre># drweb-ctl cfset LinuxSpider.ExcludedFilesystem -a cifs # drweb-ctl cfset LinuxSpider.ExcludedFilesystem -a nfs</pre> - Adding values to the configuration file. - Two values per line:<pre>[LinuxSpider] ExcludedFilesystem = "cifs", "nfs"</pre> - Two lines (one value per line):<pre>[LinuxSpider] ExcludedFilesystem = cifs ExcludedFilesystem = nfs</pre> To apply the changes, reload the Dr.Web Industrial for Linux configuration by running the command: <pre># drweb-ctl reload</pre> Default value: <code>cifs</code>
<code>[*] OnKnownVirus</code> <i>{action}</i>	Action to be applied upon detection of a known threat (a virus and so on) in the scanned file. Allowed values: <code>REPORT</code>, <code>CURE</code>, <code>QUARANTINE</code>, <code>DELETE</code>. Default value: <code>REPORT</code>
<code>[*] OnIncurable</code> <i>{action}</i>	Action to be applied upon detection of an incurable threat. Allowed values: <code>QUARANTINE</code>, <code>DELETE</code>. Default value: <code>QUARANTINE</code>
<code>[*] OnSuspicious</code> <i>{action}</i>	Action to be applied upon detection of an unknown threat (or a suspicious object) in the scanned file by using heuristic analysis. Allowed values: <code>REPORT</code>, <code>QUARANTINE</code>, <code>DELETE</code>. Default value: <code>REPORT</code>
<code>[*] OnAdware</code> <i>{action}</i>	Action to be applied upon detection of adware in the scanned file. Allowed values: <code>REPORT</code>, <code>QUARANTINE</code>, <code>DELETE</code>. Default value: <code>REPORT</code>
<code>[*] OnDialers</code> <i>{action}</i>	Action to be applied upon detection of a dialer in the scanned file. Allowed values: <code>REPORT</code>, <code>QUARANTINE</code>, <code>DELETE</code>.



Parameter	Description
	Default value: REPORT
[*] OnJokes {action}	Action to be applied upon detection of a joke program in the scanned file. Allowed values: REPORT, QUARANTINE, DELETE. Default value: REPORT
[*] OnRiskware {action}	Action to be applied upon detection of riskware in the scanned file. Allowed values: REPORT, QUARANTINE, DELETE. Default value: REPORT
[*] OnHacktools {action}	Action to be applied upon detection of a hacktool in the scanned file. Allowed values: REPORT, QUARANTINE, DELETE. Default value: REPORT
[*] ScanTimeout {time interval}	Timeout for scanning one file. Allowed values: from 1 second (1s) to 1 hour (1h). Default value: 30s
[*] HeuristicAnalysis {On Off}	Enable or disable the heuristic analysis for detection of unknown threats. The heuristic analysis provides higher detection reliability but increases the duration of scanning. Action applied to threats detected by the heuristic analyzer is specified by the OnSuspicious parameter. Allowed values: • On—enable the heuristic analysis while scanning. • Off—disable the heuristic analysis. Default value: On
[*] PackerMaxLevel {integer}	Maximum nesting level for packed objects. A packed object is executable code compressed with special software (UPX, PELock, PECompact, Petite, ASPack, Morphine and so on). Such objects may include other packed objects that may also include packed objects and so on. The value of this parameter specifies a nesting limit beyond which packed objects inside other packed objects are not scanned. The nesting level is not limited. If the value is set to 0, nested objects are not scanned. Default value: 8



Parameter	Description
<code>[*] ArchiveMaxLevel</code> <i>{integer}</i>	Maximum nesting level for archives (.zip, .rar and so on) in which other archives may be enclosed, whereas these archives may also include other archives and so on. The value of this parameter specifies the nesting limit beyond which archives enclosed in other archives are not scanned. The nesting level is not limited. If the value is set to 0, nested objects are not scanned. Default value: 0
<code>[*] MailMaxLevel</code> <i>{integer}</i>	Maximum nesting level for files of mailers (.pst, .tbb and so on) in which other files may be enclosed, whereas these files may also include other files and so on. The value of this parameter specifies the nesting limit beyond which objects inside other objects are not scanned. The nesting level is not limited. If the value is set to 0, nested objects are not scanned. Default value: 0
<code>[*] ContainerMaxLevel</code> <i>{integer}</i>	Maximum nesting level while scanning other types of objects containing nested objects (HTML pages, .jar files and so on). The value of this parameter specifies the nesting limit beyond which objects inside other objects will not be scanned. The nesting level is not limited. If the value is set to 0, nested objects are not scanned. Default value: 8
<code>[*] MaxCompressionRatio</code> <i>{integer}</i>	Maximum compression ratio of scanned objects (a ratio of an uncompressed size to a compressed size). If the ratio of an object exceeds the limit, this object is skipped during the scan. The compression ratio must be no less than 2. Default value: 500
<code>DebugAccess</code> <i>{boolean}</i>	Log or do not log detailed information on file access attempts at the debug level (with <code>LogLevel = DEBUG</code>). Default value: No

Customizing protected space individual monitoring settings

For each protected space of a file system, a separate section containing the path to a monitored file system area and monitoring parameters is specified in the configuration file together with the



[LinuxSpider] section, which stores all the monitor parameters. Each section must be named as [LinuxSpider.Space.<space name>], where <space name> is a unique identifier of the protected space.

The space individual section must contain the following parameters absent in the [LinuxSpider] general section:

Parameter	Description
Path <i>{path to directory}</i>	Path to a directory with files to be monitored (including nested directories). By default, this parameter has an empty value; therefore, you must specify a value when adding the protected space to the monitoring scope. Default value: <i>(not specified)</i>
Enable <i>{boolean}</i>	Contents of the protected space located at Path must be monitored. To stop monitoring the contents of this protected space, set the parameter to No. Default value: Yes



If all protected spaces specified in the monitor settings are not monitored or their paths are not specified, SplDer Guard is running idle because none of the files of the file system tree are monitored. If you want to monitor the file system as a single protected space, remove all named protected space sections from the settings.

Except for those mentioned above, separate sections of protected spaces can include a list of parameters from the general section of the component settings that are marked with the [*] designation in the table above and redefine a parameter specified for the protected space (for example, an action to be applied upon threat detection, the maximum archive nesting level and so on). If the parameter is not specified for the protected space, file monitoring for this space is adjusted with the corresponding parameter values from the [LinuxSpider] section.

To add a new section of parameters for the protected space with the <space name> tag using the [Dr.Web Ctl](#) management tool (started by running the drweb-ctl command), run the [command](#):

```
# drweb-ctl cfset LinuxSpider.Space -a <space name>
```

Example:

```
# drweb-ctl cfset LinuxSpider.Space -a Space1
# drweb-ctl cfset LinuxSpider.Space.Space1.Path /home/user1
```

The first command adds the [LinuxSpider.Space.Space1] section to the configuration file; the second one sets a value of the Path parameter for the section by specifying the path to the monitored file system area. Other parameters of this section will be the same as in the [LinuxSpider] general section.



9.4. Dr.Web File Checker

The Dr.Web File Checker file scanning component is designed for scanning files and directories in the file system. It is used by other components of Dr.Web Industrial for Linux to scan file system objects. In addition, this component permanently registers all threats detected in the file system and also functions as a quarantine manager, as it manages the contents of the [directories](#) where isolated files are kept.

9.4.1. Operating Principles

The Dr.Web File Checker component is started with superuser (the *root* user) privileges and scans file system objects (files, directories and boot records).

Dr.Web File Checker indexes all scanned files and directories and stores data about scanned objects in a special cache to avoid repeated scanning of the objects that have been already scanned and have not been modified since that (in this case, if a request to scan such an object is received, the previous scan result retrieved from the cache is returned).

When requests to scan file system objects are received from other components, Dr.Web File Checker checks whether the requested object requires scanning. If so, a scanning task is generated for [Dr.Web Scanning Engine](#). If the scanned object contains a threat, Dr.Web File Checker puts it in the registry of detected threats and applies an action to neutralize it (cure, delete or quarantine), if this action has been specified by the client component that initiated the scanning as a reaction to the threat. The scanning can be initiated by various components of Dr.Web Industrial for Linux.

During scanning of the requested file system objects, the file-checking component generates a report detailing scanning results and applied actions to neutralize threats, if any, and sends this report to the client component that requested scanning.

Apart from the standard file scanning method, the following special methods are available for internal use:

- *The “flow” method*—a method for scanning files in stream. A component, which uses this method, initializes parameters of scanning and threat neutralization only once. These parameters are further applied to all file scanning requests from this component. This method is used by the [SplDer Guard](#) monitor.
- *The “proxy” method*—a method for file scanning consisting in that the file-checking component only scans files for threats without applying any actions to them and without registering the detected threats (these actions are fully delegated to the component that initiated the scanning). This method is used by the .

During its operation, the file-checking component not only maintains threat registry and manages quarantine, but also collects overall file scan statistics, averaging the number of files scanned per second for the last minute, last 5 minutes, last 15 minutes.



9.4.2. Command-Line Arguments

To start the Dr.Web File Checker component from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-filecheck [<parameters>]
```

Dr.Web File Checker accepts the following parameters:

Parameter	Description
--help	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: -h Arguments: None
--version	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: -v Arguments: None

Example:

```
$ /opt/drweb.com/bin/drweb-filecheck --help
```

This command outputs short help information about the Dr.Web File Checker component.

Startup notes

The component cannot be started directly from the command line in standalone mode. It is started automatically by the [Dr.Web ConfigD](#) configuration management daemon upon receiving requests for file system scanning from other components of Dr.Web Industrial for Linux. To manage the operation parameters of the component as well as to scan files on demand, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line.



To start the Dr.Web Ctl tool, run the `drweb-ctl` [command](#).

To scan an arbitrary file or directory using Dr.Web File Checker, use the `scan` [command](#) of the Dr.Web Ctl tool:

```
$ drweb-ctl scan <path to file or directory>
```

To get documentation on this component from the command line, run the `man 1 drweb-filecheck` command.



9.4.3. Configuration Parameters

The component uses configuration parameters specified in the [FileCheck] section of the unified [configuration file](#) of Dr.Web Industrial for Linux.

This section stores the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component. If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the [Root] section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-filecheck</code>
<code>IdleTimeLimit</code> <i>{time interval}</i>	Maximum idle time for the component. When the specified period of time expires, the component shuts down. Allowed values: from 10 seconds (10s) to 30 days (30d). If the <code>None</code> value is set, the component will operate indefinitely; the <code>SIGTERM</code> signal will not be sent if the component goes idle. Default value: <code>10m</code>
<code>DebugClientIpc</code> <i>{boolean}</i>	Log or do not log detailed IPC messages at the debug level (with <code>LogLevel = DEBUG</code>). Default value: <code>No</code>
<code>DebugScan</code> <i>{boolean}</i>	Log or do not log detailed messages received during file scanning at the debug level (with <code>LogLevel = DEBUG</code>). Default value: <code>No</code>
<code>DebugFlowScan</code> <i>{boolean}</i>	Log or do not log detailed messages about file scanning using the “flow” method at the debug level (with <code>LogLevel = DEBUG</code>). The “flow” method is usually used by the SpIDer Guard monitor. Default value: <code>No</code>
<code>DebugProxyScan</code> <i>{boolean}</i>	Log or do not log detailed messages about file scanning using the “proxy” method at the debug level (with <code>LogLevel = DEBUG</code>). The “proxy” method is usually used by . Default value: <code>No</code>



Parameter	Description
DebugCache <i>{boolean}</i>	Log or do not log detailed messages about the cache status of scanned files at the debug level (with <code>LogLevel = DEBUG</code>). Default value: No
MaxCacheSize <i>{size}</i>	Maximum allowed size of cache to store data about scanned files. If 0 is specified, caching is disabled. Default value: 50mb
RescanInterval <i>{time interval}</i>	Period of time during which a file will not be rescanned if the results of its previous scan are available in the cache (the period during which the stored information is considered up-to-date). Allowed values: from 0 seconds (0s) to 1 minute (1m). If the set interval is less than 1s, there will be no delay—the file will be scanned upon any request. Default value: 1s



9.5. Dr.Web Network Checker

The Dr.Web Network Checker component is designed to scan data received over the network, with the scanning engine, as well as for distributed file scanning for threats. The component allows to establish a connection between network hosts with Dr.Web Industrial for Linux installed on them for receiving and sending data (for example, file contents) via the network hosts for scanning. The component manages automatic distribution of scanning tasks (by sending and receiving them over the network) to all available network hosts with which the connection is configured. The component balances the load caused by the scanning tasks between the hosts. If there are no configured connections with remote hosts, the component sends all the data only to the local instance of Dr.Web Scanning Engine.



This component is always used to scan the data received over network connections. Thus, if the component is absent or unavailable, the operation of the components that send data for scanning over a network connection will be hindered.

This component is not designed to manage distributed scanning of files located in a local file system, since it cannot replace the Dr.Web File Checker component. To manage distributed scanning of local files, use the [Dr.Web MeshD](#) component.

If data scanning over the network is highly intensive, issues with scanning may arise when available file descriptors are depleted. In this case, it is necessary to increase the limit by the number of file descriptors available to Dr.Web Industrial for Linux.

Data can be shared either over an insecure channel or over a secure channel via SSL/TLS. To use a secure connection it is required to provide hosts that share files with valid certificates and SSL keys. To generate keys and certificates, you can use the `openssl` utility. An example of how to use the `openssl` utility to generate certificates and private keys is given in the [Appendix E. Generating SSL Certificates](#) section.

9.5.1. Operating Principles

The component allows sending the data not represented by files of a local file system for scanning to [Dr.Web Scanning Engine](#) located on a local or remote host. This data is processed by the components that send data for scanning over a network connection.



These components always use Dr.Web Network Checker (even if it is located on a local host) to send files for scanning to Dr.Web Scanning Engine. Thus, if Dr.Web Network Checker is unavailable, these components *cannot operate correctly*.

In addition, Dr.Web Network Checker allows to connect Dr.Web Industrial for Linux to a given set of hosts on the network that run Dr.Web Industrial for Linux (or any other Dr.Web for Unix solution 10.1 or later) in order to manage a distributed search for data not represented by files of



the local file system. Thereby, this component allows to create and configure a *scanning cluster*, which is a set of network hosts that exchange data for scanning (each host must run its own instance of the Dr.Web Network Checker distributed scanning agent). On each network host comprised by the scanning cluster, Dr.Web Network Checker performs automatic distribution of tasks for scanning data, sending them over the network to all available hosts for which the connection is configured. At the same time, the host load balancing caused by data scanning is performed depending on the amount of resources available on remote hosts. The number of child scanning processes generated by Dr.Web Scanning Engine on a host comprised by the cluster indicates the amount of resources available for load. The lengths of the queues of the files for scanning on each host in use are also considered.

In this case, any network host comprised by the scanning cluster can act both as a scanning client that sends data for remote scanning and as a scanning server that receives data from the specified network hosts for scanning. If necessary, the distributed scanning agent can be configured so that the host acts only as a scanning server or only as a scanning client.

The data received over the network for scanning is stored on the local file system as temporary files and sent to [Dr.Web Scanning Engine](#) or, in case it is unavailable or heavily loaded, to another host of the scanning cluster.

The `InternalOnly` parameter of the component [settings](#) allows to manage the Dr.Web Network Checker operation mode. The parameter defines if the component is used for including Dr.Web Industrial for Linux in the scanning cluster or only for internal purposes of the Dr.Web Industrial for Linux components operating locally.



You can create your own component (external application) which will use Dr.Web Network Checker to scan files. For this, the Dr.Web Network Checker component provides a custom API based on the Google Protobuf technology. The description of the Dr.Web Network Checker API, as well as client application sample code that uses Dr.Web Network Checker, are supplied as part of the `drweb-netcheck` package.

9.5.2. Command-Line Arguments

To start the Dr.Web Network Checker component from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-netcheck [<parameters>]
```

Dr.Web Network Checker accepts the following parameters:

Parameter	Description
<code>--help</code>	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: <code>-h</code> Arguments: None
<code>--version</code>	Function: Output information about the component version to the console or the terminal emulator and shut down the component.



Short form: -v Arguments: None

Example:

```
$ /opt/drweb.com/bin/drweb-netcheck --help
```

This command outputs short help information about the Dr.Web Network Checker component.

Startup notes

The component cannot be started directly from the command line in standalone mode. The component is started automatically by the [Dr.Web ConfigD](#) configuration management daemon when necessary (usually, at the startup of the operating system). At the same time, if a `FixedSocket` parameter value is specified in the [component settings](#) and the `InternalOnly` parameter is set to `No`, the component will be started by the configuration management daemon and always available to clients via a Unix socket. To manage component operation parameters and to start network scanning (if there is a configured connection to other network hosts), use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line. If there is no configured connection to other network hosts, normal scanning will be started using the local scanning engine instead of network scanning.



To start the Dr.Web Ctl tool, run the `drweb-ctl` [command](#).

To scan an arbitrary file or directory with Dr.Web Network Checker, use the `netscan` [command](#) of the Dr.Web Ctl tool:

```
$ drweb-ctl netscan <path to file or directory>
```

To get documentation on this component from the command line, run the `man 1 drweb-netcheck` command.

9.5.3. Configuration Parameters

The component uses configuration parameters specified in the `[NetCheck]` section of the unified [configuration file](#) of Dr.Web Industrial for Linux.

The section contains the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component.



Parameter	Description
	If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the [Root] section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-netcheck</code>
<code>RunAsUser</code> <i>{UID user name}</i>	User on behalf of whom the component is started. You can specify either a numerical user identifier (UID) or a user name (login). If the user name consists of numbers (that is, the name is similar to a numerical UID), specify it with the <code>name:</code> prefix, for example, <code>RunAsUser = name:123456</code>. If the user name is invalid, the component shuts down with an error upon startup. Default value: <code>drweb</code>
<code>IdleTimeLimit</code> <i>{time interval}</i>	Maximum idle time for the component. When the specified period of time expires, the component shuts down. If the <code>LoadBalanceAllowFrom</code> or <code>FixedSocket</code> parameter is set, this setting is ignored (the component does not finish its operation after the time interval expires). Allowed values: from 10 seconds (10s) to 30 days (30d). If the <code>None</code> value is set, the component will operate indefinitely; the <code>SIGTERM</code> signal will not be sent if the component goes idle. Default value: <code>10m</code>
<code>FixedSocket</code> <i>{path to file address}</i>	Socket of the Dr.Web Network Checker agent fixed instance. If this parameter is specified, the Dr.Web ConfigD configuration management daemon ensures that there is always a running instance of the distributed scanning agent available to clients via this socket. Allowed values: • <i><path to file></i>—path to a local Unix socket; • <i><address></i>—network socket set as an <i><IP address>:<port></i> pair.



Parameter	Description
	 Ensure that the following permissions are assigned to the directory with the socket file: <pre>drwxr-xr-x</pre> To view the permissions, run the command: <pre>\$ ls -ld <path to directory></pre> Default value: <i>(not specified)</i>
<code>InternalOnly</code> <i>{boolean}</i>	Component operation mode. If the value is set to <code>Yes</code>, the component is used for internal purposes of Dr.Web Industrial for Linux components only, but not for servicing a scanning cluster or external (to Dr.Web Industrial for Linux) client applications regardless of <code>LoadBalance*</code> settings and the specified value of the <code>FixedSocket</code> parameter. Default value: <code>No</code>
<code>LoadBalanceUseSsl</code> <i>{boolean}</i>	Use or do not use SSL/TLS to connect to other hosts. Allowed values: • <code>Yes</code>—use SSL/TLS; • <code>No</code>—do not use SSL/TLS. If the parameter is set to <code>Yes</code>, a certificate and a private key must be specified for this host and for all hosts with which it interacts (the <code>LoadBalanceSslCertificate</code> and <code>LoadBalanceSslKey</code> parameters). Default value: <code>No</code>
<code>LoadBalanceSslCertificate</code> <i>{path to file}</i>	Path to the SSL certificate used by Dr.Web Network Checker on the current host for communication with other hosts via a secure SSL/TLS connection.  The certificate file and the private key file (specified by the <code>LoadBalanceSslKey</code> parameter) must match each other. Default value: <i>(not specified)</i>
<code>LoadBalanceSslKey</code> <i>{path to file}</i>	Path to the private key file used by Dr.Web Network Checker on the current host for communication with other hosts via a secure SSL/TLS connection.



Parameter	Description
	 The certificate file (specified by the <code>LoadBalanceSslCertificate</code> parameter) and the private key file must match each other. Default value: <i>(not specified)</i>
<code>LoadBalanceSslCa</code> <i>{path}</i>	Path to the directory or file with the list of trusted root certificates. Among these certificates, there must be a certificate that certifies the authenticity of the certificates used by agents within the scanning cluster when exchanging data via SSL/TLS protocols. If the parameter value is empty, Dr.Web Network Checker operating on the current host does not authenticate certificates of interacting agents; however, depending on the settings, these agents can verify authenticity of the certificate used by the agent operating on this host. Default value: <i>(not specified)</i>
<code>LoadBalanceServerSocket</code> <i>{address}</i>	Network socket (an IP address and a port) listened by Dr.Web Network Checker on the current host for receiving files sent by remote hosts for scanning (in case of operating as a network scanning server). Default value: <i>(not specified)</i>
<code>LoadBalanceAllowFrom</code> <i>{IP address}</i>	IP address of a remote network host from which the Dr.Web Network Checker operating on the current host can receive files for scanning (as a network scanning server). Accepts a list of values. The values in the list must be comma-separated (with each value put in quotation marks). The parameter can be specified more than once in the section (in this case, all its values are combined into one list). Example: Add host addresses 192.168.0.1 and 10.20.30.45 to the list. - Adding values to the configuration file. - Two values per line: <pre>[NetCheck] LoadBalanceAllowFrom = "192.168.0.1", "10.20.30.45"</pre> - Two lines (one value per line): <pre>[NetCheck] LoadBalanceAllowFrom = 192.168.0.1 LoadBalanceAllowFrom = 10.20.30.45</pre>



Parameter	Description
	2. Adding the values using the <code>drweb-ctl cfset</code> command: <pre># drweb-ctl cfset NetCheck.LoadBalanceAllowFrom -a 192.168.0.1 # drweb-ctl cfset NetCheck.LoadBalanceAllowFrom -a 10.20.30.45</pre> If the parameter is empty, remote files are not accepted for scanning (the host does not operate as a scanning server). Default value: <i>(not specified)</i>
<code>LoadBalanceSourceAddress</code> <i>{IP address}</i>	IP address of a network interface used by Dr.Web Network Checker on the current host to transfer files for remote scanning (if the host operates as a network scanning client and has several network interfaces). If an empty value is specified, the network interface is automatically selected by the OS kernel. Default value: <i>(not specified)</i>
<code>LoadBalanceTo</code> <i>{address}</i>	Socket (an IP address and a port) of a remote host to which Dr.Web Network Checker operating on the current host can send files for remote scanning (as a network scanning client). Accepts a list of values. The values in the list must be comma-separated (with each value put in quotation marks). The parameter can be specified more than once in the section (in this case, all its values are combined into one list). Example: Add sockets 192.168.0.1:1234 and 10.20.30.45:5678 to the list. 1. Adding values to the configuration file. - Two values per line: <pre>[NetCheck] LoadBalanceTo = "192.168.0.1:1234", "10.20.30.45:5678"</pre> - Two lines (one value per line): <pre>[NetCheck] LoadBalanceTo = 192.168.0.1:1234 LoadBalanceTo = 10.20.30.45:5678</pre> 2. Adding the values using the <code>drweb-ctl cfset</code> command: <pre># drweb-ctl cfset NetCheck.LoadBalanceTo -a 192.168.0.1:1234 # drweb-ctl cfset NetCheck.LoadBalanceTo -a 10.20.30.45:5678</pre>



Parameter	Description
	If the parameter value is empty, local files cannot be transferred for a remote scanning (the host does not operate as a network scanning client). Default value: <i>(not specified)</i>
<code>LoadBalanceStatusInterval</code> <i>{time interval}</i>	Time interval the current host waits to inform all distributed scanning agents specified in the <code>LoadBalanceAllowFrom</code> parameter about its workload. Default value: 1s
<code>SpoolDir</code> <i>{path to directory}</i>	Local file system directory used to store files received from clients by Dr.Web Network Checker over the network for scanning. Default value: <code>/tmp/com.drweb.nccheck</code>
<code>LocalScanPreference</code> <i>{fractional number}</i>	Relative weight (priority) of the host upon selecting a server to scan a file (a local file or a file received over the network). If at some instant a relative weight of the local host is greater than the total weight of all hosts available as scanning servers, the file is kept by the agent for local scanning. Minimal value: 1. Default value: 1
<code>LoadBalanceSslCrl</code> <i>{path}</i>	Path to the directory or file with a list of revoked certificates. If a parameter value is not specified, Dr.Web Network Checker running on the current host does not verify certificates of interacting agents; however, depending on the settings, they may verify relevance of the certificate used by the agent running on the current host. Default value: <i>(not specified)</i>



9.6. Dr.Web Scanning Engine

Dr.Web Scanning Engine is designed to search for viruses and other malicious objects in files and boot records (*MBR—Master Boot Record*, *VBR—Volume Boot Record*) of disk devices. The component loads Dr.Web Virus-Finding Engine into memory and starts it as well as loads Dr.Web virus databases used by the engine to detect threats.

The scanning engine operates in daemon mode, as a service that receives requests for scanning file system objects from other Dr.Web Industrial for Linux components (these are Dr.Web File Checker and Dr.Web Network Checker and, potentially, Dr.Web MeshD). If Dr.Web Scanning Engine and Dr.Web Virus-Finding Engine are absent or unavailable, no antivirus scanning is performed on this host (except when Dr.Web Industrial for Linux contains the Dr.Web MeshD component, whose settings define a connection to local cloud hosts providing scanning engine services).

9.6.1. Operating Principles

The Dr.Web Scanning Engine component operating in daemon mode receives requests from other Dr.Web Industrial for Linux components to scan file system objects (files and boot records) for embedded threats, queues scanning tasks and scans requested objects with Dr.Web Virus-Finding Engine. If a threat is detected in a scanned object that must be cured according to the scanning task, the scanning engine attempts to cure it if this action is applicable.

The scanning engine, Dr.Web Virus-Finding Engine and virus databases form a single entity and cannot be separated. The scanning engine downloads the virus databases and provides an operation environment for cross-platform Dr.Web Virus-Finding Engine. The virus databases and the scanning engine are updated by the [Dr.Web Updater](#) component included in Dr.Web Industrial for Linux but not being a part of the scanning engine. The update component is run by the [Dr.Web ConfigD](#) configuration management daemon periodically or forcibly in response to a user command. In addition, if Dr.Web Industrial for Linux operates in centralized protection mode, the virus databases and the scanning engine are updated by [Dr.Web ES Agent](#), which interacts with a centralized protection server and receives updates from it.

Dr.Web Scanning Engine can be controlled by the Dr.Web ConfigD configuration management daemon or operate in standalone mode. In the former case, the daemon starts the engine and ensures that the virus databases are up to date. In the latter case, the engine is started and the virus databases are updated by an external application that uses the engine. Both the Dr.Web Industrial for Linux components that make requests to the scanning engine for scanning files and external applications use the same API.



You can create your own component (an external application) using Dr.Web Scanning Engine for scanning files. For this purpose, Dr.Web Scanning Engine provides a custom API based on the Google Protobuf technology. To obtain the Dr.Web Scanning Engine API guide and examples of client application code using Dr.Web Scanning Engine, contact the [partner relations department](#)  of the Doctor Web company.



Received scanning tasks are automatically distributed in queues with different priorities (high, normal and low). Selection of a queue for a task depends on the component that created the task. For example, tasks received from file system monitors are placed in a high-priority queue, because response time is important while monitoring file system objects. The scanning engine collects statistics on its usage, including the number of all tasks received for scanning and queue lengths. As an average load rate, the scanning engine uses an average length of queues per second. This rate is averaged for the last minute, last 5 minutes and last 15 minutes.

Dr.Web Virus-Finding Engine supports a signature analysis (signature-based detection of threats covered by virus databases) and other [methods](#) of heuristic and behavioral analyses designed for detection of potentially dangerous objects based on machine instructions and other attributes of executable code.



Heuristic analyzer cannot guarantee highly reliable results and may cause the following errors:

- *Errors of the first type.* These errors occur when a safe object is detected as malicious (false positive detections).
- *Errors of the second type.* These errors occur when a malicious object is detected as safe.

Thus, objects detected by the heuristic analyzer are treated as *Suspicious*.

It is recommended that you quarantine suspicious objects. After virus databases are updated, such files can be scanned using the signature analysis. Keep the virus databases up to date in order to avoid errors of the second type.

Dr.Web Virus-Finding Engine allows scanning both unpacked and packed files and objects inside various containers, such as archives, email messages and so on.

9.6.2. Command-Line Arguments

To start Dr.Web Scanning Engine from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-se <socket> [<parameters>]
```

where the mandatory `<socket>` argument indicates an address of a socket used by Dr.Web Scanning Engine for processing requests of client components. It can be set only as a file path (a Unix socket).

Dr.Web Scanning Engine accepts the following parameters:

Parameter	Description
<code>--help</code>	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: <code>-h</code> Arguments: None



--version	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: -v Arguments: None
<i>Startup options (identical to configuration file parameters and substitute them when necessary):</i>	
--CoreEnginePath	Function: Path to the library of Dr.Web Virus-Finding Engine. Short form: None. Arguments: <path to file>—full path to the library in use.
--VirusBaseDir	Function: Path to a directory with virus database files. Short form: None. Arguments: <path to directory>—full path to the virus database directory.
--TempDir	Function: Path to a directory with temporary files. Short form: None. Arguments: <path to directory>—full path to the directory with temporary files.
--KeyPath	Function: Path to the key file in use. Short form: None. Arguments: <path to file>—full path to the key file.
--MaxForks	Function: Maximum allowed number of child processes that can be spawned by Dr.Web Scanning Engine during scanning. Short form: None. Arguments: <number>—maximum allowed number of child processes.
--WatchdogInterval	Description: Frequency with which Dr.Web Scanning Engine checks whether child processes are operable and ends those that stopped responding. Short form: None. Arguments: <time interval>—frequency of checking child processes.
--AbortForkOnTimeout	Function: Terminate scan processes by sending them SIGABRT on timeout. Short form: None. Arguments: None
--ShellTrace	Function: Shell tracing (log detailed information about file scanning performed by Dr.Web Virus-Finding Engine). Short form: None. Arguments: None
--LogLevel	Description: Logging level of Dr.Web Scanning Engine during its operation. Short form: None.



	Arguments: <i><logging level></i>. Allowed values: • DEBUG—the most detailed logging level. All messages and debug information are logged. • INFO—all messages are logged. • NOTICE—all error messages, warnings and notifications are logged. • WARNING—all error messages and warnings are logged. • ERROR—only error messages are logged.
<code>--Log</code>	Description: Logging method of the component. Short form: None. Arguments: <i><log type></i>. Allowed values: • Stderr[:ShowTimestamp]—output messages to the standard error stream <i>stderr</i>. The <i>ShowTimestamp</i> option is used to add a timestamp to every message. • Syslog[:<facility>]—pass messages to the <i>syslog</i> system logging service. The additional <i><facility></i> option is used to specify a type of a log to store messages logged by <i>syslog</i>. Allowed values: ◦ DAEMON—messages from daemons; ◦ USER—messages from user processes; ◦ MAIL—messages from mailers; ◦ LOCAL0—messages from local processes 0; ... ◦ LOCAL7—messages from local processes 7. • <i><path></i>—path to a file for storing log messages. Examples: <pre>--Log /var/opt/drweb.com/log/se.log --Log Stderr:ShowTimestamp --Log Syslog:DAEMON</pre>
<code>--ForkMemoryLimit</code>	Description: Maximum amount of operating memory allocated for operation of a scanning engine instance. Short form: None. Arguments: <i><size in bytes></i>—maximum amount of operating memory. Allowed values: From 1073741824 bytes (1 Gb) to 4294967296 bytes (4 Gb). Default value: 4294967296 (4 Gb)  This parameter has no effect in 32-bit distributions of the product.
<code>--EngineDallocLimit</code>	Description: Maximum amount of operating memory allocated for storing temporary files.



	Short form: None. Arguments: <i><size in bytes></i>—maximum amount of operating memory. Allowed values: From 52428800 bytes (50 Mb) to 1073741824 bytes (1 Gb). Default value: 524288000 (500 Mb)  It is strongly recommended to change the default value of this parameter only if you are sure that this is necessary.
--	--

Example:

```
$ /opt/drweb.com/bin/drweb-se /tmp/drweb.ipc/.se --MaxForks=5
```

This command starts an instance of Dr.Web Scanning Engine and instructs it to create the `/tmp/drweb.ipc/.se` Unix socket to interact with client components and limit the number of child scanning processes to 5.

Startup notes

If necessary, any number of instances of Dr.Web Scanning Engine can be started, which provide the scanning service for client applications (not only for Dr.Web Industrial for Linux components). At that, if a value of the `FixedSocketPath` parameter is specified in the component [settings](#), one instance of the scanning engine is always run by the [Dr.Web ConfigD](#) configuration management daemon and available to the clients via the Unix socket. Instances of the scanning engine started directly from the command line will operate in standalone mode without establishing connection to the configuration management daemon, even if it is running. To manage the operation of the component, as well as to scan files upon request, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line.



To start the Dr.Web Ctl tool, run the `drweb-ctl` [command](#).

To scan an arbitrary file or directory with Dr.Web Scanning Engine, use the `rawscan` [command](#) of the Dr.Web Ctl tool:

```
$ drweb-ctl rawscan <path to file or directory>
```

To get documentation on this component from the command line, run the `man 1 drweb-se` command.

9.6.3. Configuration Parameters

The component uses configuration parameters specified in the `[ScanEngine]` section of the unified [configuration file](#) of Dr.Web Industrial for Linux.



This section stores the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component. If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the [Root] section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-se</code>
<code>IdleTimeLimit</code> <i>{time interval}</i>	Maximum idle time for the component. When the specified period of time expires, the component shuts down. If the <code>FixedSocketPath</code> parameter is set, this setting is ignored (the component does not finish its operation after the time interval expires). Allowed values: from 10 seconds (<code>10s</code>) to 30 days (<code>30d</code>). If the <code>None</code> value is set, the component will operate indefinitely; the <code>SIGTERM</code> signal will not be sent if the component goes idle. Default value: <code>1h</code>
<code>FixedSocketPath</code> <i>{path to file}</i>	Path to the Unix socket of the fixed instance of Dr.Web Scanning Engine. If this parameter is specified, the Dr.Web ConfigD configuration management daemon ensures that there is always a running scanning engine instance available to clients via this socket.  Ensure that the following permissions are assigned to the directory with the socket file: <pre>drwxr-xr-x</pre> To view the permissions, run the command: <pre>\$ ls -ld <path to directory></pre> Default value: <i>(not specified)</i>
<code>MaxForks</code> <i>{integer}</i>	Maximum allowed number of child scanning processes that can run simultaneously spawned by Dr.Web Scanning Engine. Default value: <i>Automatically determined at startup</i> as twice the number of available CPU cores; or 4, if the resulting number is less than 4.



Parameter	Description
<code>ForkMemoryLimit</code> <i>{integer}</i>	Maximum amount of operating memory allocated for operation of a scanning engine instance. The value is specified as an integer with a suffix (<i>b</i>, <i>kb</i>, <i>mb</i>, <i>gb</i>). If no suffix is specified, the value is treated as a size in bytes. Allowed values: from 1 gigabyte (1GB) to 4 gigabytes (4GB). Default value: 4GB  This parameter has no effect in 32-bit distributions of Dr.Web Industrial for Linux.
<code>EngineDallocLimit</code> <i>{integer}</i>	Maximum amount of operating memory allocated for storing temporary files. If the specified value is less than the size of a temporary file, then it will be created on the storage device, which will slow down the operation of Dr.Web Industrial for Linux. The value is specified as an integer with a suffix (<i>b</i>, <i>kb</i>, <i>mb</i>, <i>gb</i>). If no suffix is specified, the value is treated as a size in bytes. Allowed values: from 50 megabytes (50MB) to 1 gigabyte (1GB). Default value: 500MB  It is strongly recommended to change the default value of this parameter only if you are sure that this is necessary.
<code>WatchdogInterval</code> <i>{time interval}</i>	Rate at which Dr.Web Scanning Engine checks whether child scanning processes spawned by it are operable to detect deadlocks ("watchdog timer"). Default value: 15s
<code>BufferedIo</code> <i>{boolean}</i>	Enable or disable buffered input/output while scanning files. Using buffered input/output on OSes of the GNU/Linux family can increase speed of scanning files on slow disks. Allowed values: • On, Yes, True—enable buffered input/output; • Off, No, False—disable buffered input/output. Default value: Off
<code>AbortForkOnTimeout</code> <i>{boolean}</i>	Terminate or do not terminate scan processes by sending them SIGABRT on timeout. Allowed values: • On, Yes, True—terminate scan processes on timeout;



Parameter	Description
	• Off, No, False—do not terminate scan processes on timeout. Default value: Off



9.7. Dr.Web Updater

The Dr.Web Updater component is designed for receiving all available updates for virus databases and Dr.Web Virus-Finding Engine from Doctor Web update servers.

If Dr.Web Industrial for Linux operates in [centralized protection mode](#), updates are received from a centralized protection server; at that, all updates are received from the server via [Dr.Web ES Agent](#), and Dr.Web Updater is not used for downloading updates.

9.7.1. Operating Principles

The component is designed to establish connections to Doctor Web update servers to check for updates for virus databases and Dr.Web Virus-Finding Engine. The lists of the servers that constitute an available update zone are stored in a special file signed to prevent its modification. Only basic and digest authentication are supported for connection to the update servers using a proxy server.

If Dr.Web Industrial for Linux is not connected to a centralized protection server or is connected to it in mobile mode, Dr.Web Updater is automatically started by the Dr.Web ConfigD configuration management daemon at intervals specified in the [settings](#). The component can also be started by Dr.Web ConfigD upon receiving a corresponding [command](#) from the user (unscheduled update).

When updates become available on update servers, they are downloaded to the directory `/var/opt/drweb.com/cache/`; after that they are moved to the working directories of Dr.Web Industrial for Linux.

By default, all updates are downloaded from the update zone that is common for all Dr.Web products. The list of the servers used by default and included in the update zone is specified in the files located in directories defined by `*DrlDir` parameters. Upon a client request a custom update zone can be created (for each update type), the server list of which is specified in a separate file (named `update.drl` by default). This file is located in the directory specified by the corresponding `*CustomDrlDir` parameter. In this case, the update component will download updates only from these servers without using the servers from the default zone.

If you do not want to use the custom update zone, clear the value of the corresponding `*CustomDrlDir` parameter in the component settings.



The content of the files with server lists is signed so that the files cannot be modified. If you need to create a custom list of update servers, contact our [technical support](#).

The component can back up the files to be updated to further roll back updates at user request. You can specify a backup location and an update history depth in the component settings. To roll back updates, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line (run the tool using the `drweb-ctl` command).



9.7.2. Command-Line Arguments

To start the Dr.Web Updater component from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-update [<parameters>]
```

Dr.Web Updater accepts the following parameters:

Parameter	Description
--help	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: -h Arguments: None
--version	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: -v Arguments: None

Example:

```
$ /opt/drweb.com/bin/drweb-update --help
```

This command outputs short help information about the Dr.Web Updater component.

Startup notes

The component cannot be started directly from the command line in standalone mode. The component is started automatically by the [Dr.Web ConfigD](#) configuration daemon when necessary. To manage the operation parameters of the component, as well as to update virus databases and the scan engine, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line.



To start the Dr.Web Ctl tool, run the `drweb-ctl` [command](#).

To get documentation on this component from the command line, run the `man 1 drweb-update` command.

9.7.3. Configuration Parameters

The component uses configuration parameters specified in the [Update] section of the unified [configuration file](#) of Dr.Web Industrial for Linux.



The section contains the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component. If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the [Root] section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-update</code>
<code>RunAsUser</code> <i>{UID user name}</i>	User on behalf of whom the component is started. You can specify either a numerical user identifier (UID) or a user name (login). If the user name consists of numbers (that is, the name is similar to a numerical UID), specify it with the <code>name:</code> prefix, for example, <code>RunAsUser = name:123456</code>. If the user name is invalid, the component shuts down with an error upon startup. Default value: <code>drweb</code>
<code>IdleTimeLimit</code> <i>{time interval}</i>	Maximum idle time for the component. When the specified period of time expires, the component shuts down. The component is started upon the next update on schedule. When the update is completed, it is waiting for the specified time interval, and, if there are no new requests, it shuts down until the next update attempt. Allowed values: from 10 seconds (<code>10s</code>) to 30 days (<code>30d</code>). If the <code>None</code> value is set, the component will operate indefinitely; the <code>SIGTERM</code> signal will not be sent if the component goes idle. Default value: <code>10m</code>
<code>Start</code> <i>{boolean}</i>	Enable or disable the component at the startup of Dr.Web Industrial for Linux. This parameter has priority over the <code>DwsUpdateEnabled</code> parameter. Allowed values: • <code>Yes</code>—enable the component at the startup of Dr.Web Industrial for Linux; • <code>No</code>—disable the component at the startup of Dr.Web Industrial for Linux. Default value: <code>Yes</code>



Parameter	Description
<code>UpdateInterval</code> <i>{time interval}</i>	The frequency to check for updates on Dr.Web update servers. This is a time period between a previous successful attempt to connect to the update servers (initiated automatically or manually) and the next attempt to perform an update. Default value: 30m
<code>NetworkTimeout</code> <i>{time interval}</i>	A time-out period imposed on the network-related operations of the component while downloading updates from Dr.Web servers. This parameter is used when a connection is temporarily lost: if the connection is established again before the time-out expires, the interrupted updating process will be continued. Specifying the time-out value greater than 75s has no effect as the connection is closed by the TCP timeout. Minimal value: 5s. Default value: 60s
<code>RetryInterval</code> <i>{time interval}</i>	Frequency of repeated attempts to perform an update using the update servers if the previous attempt failed. Allowed values: from 1 minute (1m) to 30 minutes (30m). Default value: 3m
<code>MaxRetries</code> <i>{integer}</i>	Number of repeated attempts to perform an update using Dr.Web update servers (the frequency is specified in the <code>RetryInterval</code> parameter) if the previous attempt failed. If the value is set to 0, repeated attempts are not made (the next update will be performed after the time period specified in the <code>UpdateInterval</code> parameter). Default value: 3
<code>UseHttps</code> <i>{Always ResListOnly Never}</i>	Use or do not use HTTPS while downloading updates. Allowed values: • <code>Always</code>—always use HTTPS while downloading updates. • <code>ResListOnly</code>—use HTTPS only while downloading an <code>.lst</code> file containing a list of update files. At that, update files will be downloaded via HTTP. • <code>Never</code>—always use HTTP while downloading updates. Default value: <code>ResListOnly</code>
<code>Proxy</code> <i>{connection string}</i>	Parameters for connecting to a proxy server that is used by the Dr.Web Updater component when it is connecting to Dr.Web



Parameter	Description
	update servers (for example, if connecting directly to external servers is prohibited by network security policies). If a parameter value is not specified, the proxy server is not used. Allowed values: <i><connection string></i>—proxy server connection string. The string has the following format (URL): [<i><protocol></i> : / /] [<i><user></i> : <i><password></i> @] <i><host></i> : <i><port></i> where: • <i><protocol></i> is a type of the protocol in use (in the current version, only <code>http</code> is available); • <i><user></i> is a user name for connecting to the proxy server; • <i><password></i> is a password for connecting to the proxy server; • <i><host></i> is the host address of the proxy server (an IP address or a domain name, i.e. FQDN); • <i><port></i> is a port to be used. The URL parts <i><protocol></i> and <i><user></i>:<i><password></i> may be absent. The proxy server address <i><host></i>:<i><port></i> is mandatory. If the user name or the password contains characters <code>@</code>, <code>%</code> or <code>:</code>, these characters must be replaced with the corresponding HEX codes: <code>%40</code>, <code>%25</code> and <code>%3A</code> respectively. Examples: 1. In the configuration file: • Connection to a proxy server hosted at <code>proxyhost.company.org</code> using port 123: <code>Proxy = proxyhost.company.org:123</code> • Connection to a proxy server hosted at <code>10.26.127.0</code> using port 3336 via HTTP protocol as the <code>legaluser</code> user with the <code>passw</code> password: <code>Proxy = http://legaluser:passw@10.26.127.0:3336</code> • Connection to the proxy server hosted at <code>10.26.127.0</code> using port 3336 as the <code>user@company.com</code> user with the <code>passw%123</code> password: <code>Proxy = user%40company.com:passw%25123%3A@10.26.127.0:3336</code> 2. Setting the same values using the <code>drweb-ctl cfset</code> command:<pre># drweb-ctl cfset Update.Proxy proxyhost.company.org:123 # drweb-ctl cfset Update.Proxy http://legaluser:passw@10.26.127.0:3336 # drweb-ctl cfset Update.Proxy user% 40company.com:passw%25123%3A@10.26.127.0:3336</pre>



Parameter	Description
	Default value: <i>(not specified)</i>
<code>ExcludedFiles</code> <i>{file name}</i>	Name of a file that will not be updated by the Dr.Web Updater component. Accepts a list of values. The values in the list must be comma-separated (with each value put in quotation marks). The parameter can be specified more than once in the section (in this case, all its values are combined into one list). Example: Add the <code>123.vdb</code> and <code>456.dws</code> files to the list. - Adding values to the configuration file. - Two values per line:<pre>[Update] ExcludedFiles = "123.vdb", "456.dws"</pre> - Two lines (one value per line):<pre>[Update] ExcludedFiles = 123.vdb ExcludedFiles = 456.dws</pre> - Adding the values using the <code>drweb-ctl cfset</code> command:<pre># drweb-ctl cfset Update.ExcludedFiles -a 123.vdb # drweb-ctl cfset Update.ExcludedFiles -a 456.dws</pre> Default value: <code>drweb32.lst</code>
<code>BaseUpdateEnabled</code> <i>{boolean}</i>	Allow or do not allow updating the virus databases and the scan engine. Allowed values: - Yes—updating is allowed and will be performed; - No—updating is not allowed and will not be performed. Default value: <code>Yes</code>
<code>BaseDrlDir</code> <i>{path to directory}</i>	Path to a directory that contains files used for connection to servers of a standard update zone, which are used to update virus databases and the scan engine. Default value: <code>/var/opt/drweb.com/drl/bases</code>
<code>BaseCustomDrlDir</code> <i>{path to directory}</i>	Path to a directory that contains files used for connection to a special ("customized") update zone, which are used to update virus databases and the scan engine. If the directory defined in this parameter contains a non-empty signed server list file (the <code>.drl</code> file), the update is performed only from these servers, and the main zone servers (see above) are not used to update the virus databases and the scanning engine.



Parameter	Description
	Default value: <code>/var/opt/drweb.com/custom-drl/bases</code>
<code>VersionUpdateEnabled</code> <i>{boolean}</i>	Allow or do not allow updating versions of Dr.Web Industrial for Linux components. Allowed values: • <code>Yes</code>—updating is allowed and will be performed; • <code>No</code>—updating is not allowed and will not be performed. Default value: <code>Yes</code>
<code>VersionDrlDir</code> <i>{path to directory}</i>	Path to a directory that contains files for connection to servers that are used for updating versions of Dr.Web Industrial for Linux components. Default value: <code>/var/opt/drweb.com/drl/version</code>
<code>BackupDir</code> <i>{path to directory}</i>	Path to a directory where old versions of updated files are saved for possible rollback. Only updated files are backed up upon every update. Default value: <code>/var/opt/drweb.com/backup</code>
<code>MaxBackups</code> <i>{integer}</i>	The maximum number of the previous versions of updated files, which are saved. If this number is exceeded, the oldest copy is removed upon the next update. If the parameter value is <code>0</code>, the previous versions of backup files are not stored. Default value: <code>0</code>



9.8. Dr.Web ES Agent

The centralized protection agent Dr.Web ES Agent is designed for connecting Dr.Web Industrial for Linux to a [centralized protection](#) server.

When Dr.Web Industrial for Linux is connected to the centralized protection server, Dr.Web ES Agent synchronizes the license [key file](#) with the key files stored on the centralized protection server. In addition, Dr.Web ES Agent sends statistics on virus events, the list of running components and their status to the centralized protection server.

Furthermore, Dr.Web ES Agent updates Dr.Web Industrial for Linux virus databases directly from the connected centralized protection server without using the [Dr.Web Updater](#) component.

9.8.1. Operating Principles

The Dr.Web ES Agent component connects to a centralized protection server, which allows a network administrator to implement a common security policy within the entire network, in particular, to configure the same scanning settings and reaction on threat detection for all workstations and servers of the network. In addition, the centralized protection server also acts as an internal update server on the protected network and stores up-to-date virus databases (in this case, updating is performed via Dr.Web ES Agent, [Dr.Web Updater](#) is not used).

When Dr.Web ES Agent connects to the centralized protection server, the agent receives up-to-date settings of the program components and the license key file from the server, which are then passed to the [Dr.Web ConfigD](#) configuration management daemon for applying them to the managed components. In addition, the component can also receive tasks from the centralized protection server for scanning file system objects on the station (including on schedule).

Dr.Web ES Agent collects statistics on detected threats and applied actions and sends it to the server to which the agent is connected.

To connect Dr.Web ES Agent to the centralized protection server, the password and identifier of the host ("station" in terms of the centralized protection server) are required as well as a public encryption key file, which is used by the server for authentication. Instead of the station identifier, while connecting, you can specify the identifier of the main and tariff groups in which the station is to be included. For the required identifiers and public key file, contact the administrator of your anti-virus network.

In addition, you can connect a protected host ("station") to the centralized protection server as a "newbie", if this is allowed by the centralized protection server. In this case, after the administrator confirms the request to connect the station, the centralized protection server automatically generates new identifier and password for the host and sends them to the agent for future connections.



9.8.2. Command-Line Arguments

To start the Dr.Web ES Agent component from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-esagent [<parameters>]
```

Dr.Web ES Agent accepts the following parameters:

Parameter	Description
--help	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: -h Arguments: None
--version	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: -v Arguments: None

Example:

```
$ /opt/drweb.com/bin/drweb-esagent --help
```

This command outputs short help information about the Dr.Web ES Agent component.

Startup notes

The component cannot be started directly from the command line in standalone mode. The component is started automatically by the [Dr.Web ConfigD](#) configuration daemon at the startup of the operating system. To manage the operation parameters of the component as well as to connect Dr.Web Industrial for Linux to a centralized protection server, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line.



To start the Dr.Web Ctl tool, run the `drweb-ctl command`.

To get documentation on this component from the command line, run the `man 1 drweb-esagent` command.

9.8.3. Configuration Parameters

The component uses configuration parameters specified in the `[ESAgent]` section of the unified [configuration file](#) of Dr.Web Industrial for Linux.



The section contains the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component. If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the <code>[Root]</code> section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-esagent</code>
<code>MobileMode</code> <i>{On Off Auto}</i>	Enable or disable the mobile mode of Dr.Web Industrial for Linux while connected to a centralized protection server. Allowed values: • <code>On</code>—enable the mobile mode if it is allowed by the centralized protection server (install updates from the update servers of Doctor Web using Dr.Web Updater); • <code>Off</code>—disable the mobile mode and continue operation in centralized protection mode (always receive updates from the centralized protection server); • <code>Auto</code>—enable the mobile mode if allowed by the centralized protection server and install updates both from the update servers of Doctor Web using Dr.Web Updater and from the centralized protection server depending on which connection is available and which connection quality is higher.  Behavior of this parameter depends on server permissions: if the mobile mode is not allowed on the server in use, this parameter has no effect. Default value: <code>Auto</code>
<code>Discovery</code> <i>{On Off}</i>	Allow or do not allow the agent to receive <i>discovery</i> requests from a network inspector built in the centralized protection server (<i>discovery</i> requests are used by the inspector to check the structure and state of the anti-virus network). Allowed values: • <code>On</code>—allow the agent to receive and process <i>discovery</i> requests; • <code>Off</code>—do not allow the agent to receive and process <i>discovery</i> requests.



Parameter	Description
	 This parameter has priority over the settings of the centralized protection server: if the parameter value is set to <code>Off</code>, the agent does not receive discovery requests even if this feature is enabled on the server. Default value: <code>On</code>
<code>UpdatePlatform</code> <i>{platform name}</i>	Designation of a platform for which the agent will receive updates for the scanning engine from the centralized protection server. Allowed values: • for GNU/Linux: <code>unix-linux-32</code>, <code>unix-linux-64-engine64</code>, <code>unix-linux-aarch64</code>, <code>unix-linux-e2k</code>, <code>unix-linux-e2k-engine64</code>, <code>unix-linux-mips</code>, <code>unix-linux-ppc64le</code>; • for FreeBSD: <code>unix-freebsd-32</code>, <code>unix-freebsd-64-engine64</code>; • for Darwin: <code>unix-darwin-32</code>, <code>unix-darwin-64-engine64</code>, <code>unix-darwin-aarch64</code>.  It is strongly recommended to change the parameter value only if you are sure that this is necessary. Default value: <i>Depends on the platform in use</i>
<code>DebugIpc</code> <i>{boolean}</i>	Log or do not log IPC messages at the debug level (with <code>LogLevel = DEBUG</code>) (interaction of Dr.Web ES Agent with the Dr.Web ConfigD configuration management daemon). Default value: <code>No</code>
<code>DebugConfig</code> <i>{boolean}</i>	Log or do not log information about settings received from the centralized protection server. Default value: <code>No</code>
<code>SrvMsgAutoremove</code> <i>{integer}</i>	Storage period after which the messages from the centralized protection server are removed automatically. Allowed values: from 1 week (<code>1w</code>) to 365 days (<code>365d</code>). The storage period is specified as an integer with a suffix (<code>s</code>, <code>m</code>, <code>h</code>, <code>d</code>, <code>w</code>). Default value: <code>1w</code>



9.9. Dr.Web MeshD

The Dr.Web MeshD component is an agent that integrates a host on which Dr.Web Industrial for Linux is installed with a “local cloud”, which combines hosts with installed Dr.Web for Unix products. This cloud allows some cloud hosts to access the scanning engine of other cloud hosts, in other words, to receive file scanning services.

To combine hosts with Dr.Web for Unix products installed, the Dr.Web MeshD component, which integrates a host with the cloud, must be installed on every host. Host privileges within the cloud and cloud features used by a host are flexibly adjusted with Dr.Web MeshD settings.

Data is shared with other cloud hosts over a protected SSH channel.

9.9.1. Operating Principles

In this section

- [Connection types](#)
- [Operation modes](#)
- [Services](#)
 - [Remote file scanning \(Engine\)](#)
 - [Sending files for scanning \(File\)](#)
 - [URL checking \(Url\)](#)

Dr.Web MeshD is a mediator that ensures interaction of a host with Dr.Web Industrial for Linux installed and other cloud hosts.

Connection types

Dr.Web MeshD uses the following connection types:

- *Client (service)*—used by Dr.Web MeshD to connect to other cloud hosts that are clients of services provided by the given host.



Dr.Web Industrial for Linux components operating on the host and using services provided by the cloud connect to Dr.Web MeshD, which operates on the same host, through a local Unix socket. At that, a client connection is not used.

- *Partner (peer to peer)*—used by Dr.Web MeshD for interaction with peer (within a service) partner cloud hosts. Usually such horizontal connections are used for scaling and distributing the load when interacting with the cloud, as well as for synchronization of cloud hosts.
- *Uplink*—used by Dr.Web MeshD for connecting this host as a client to cloud hosts that provide services (for example, sending files for scanning and so on).



The use of all three types of connections is configured for different cloud services independently from each other. At that, the same host can be configured as a server for processing client requests within one service (for example, checking URLs) and as a client within another service (for example, remote file scanning).

Within cloud, hosts perform authorized interaction via SSH, that is, all sides of interhost communication are always mutually authenticated. For the authentication, *host keys* are used in compliance with [RFC 4251](#) . A client connection from a local component is always considered as trusted.

Operation modes

Dr.Web MeshD can either operate in daemon mode or run at the request of other Dr.Web Industrial for Linux components installed on the local host. If Dr.Web MeshD is configured to serve client connections (the `ListenAddress` parameter is not empty) and at least one of the services is activated, Dr.Web MeshD starts as a daemon and awaits client connections.

If Dr.Web MeshD is not set to process client connections (the `ListenAddress` parameter is empty) and there are no requests to this component during a time interval specified by the `IdleTimeLimit` parameter, the component shuts down automatically.

Services

Remote file scanning (Engine)

This service allows to use Dr.Web Scanning Engine for scanning remote files: hosts acting as clients send files for scanning to a server host, and server hosts provide a service for scanning files sent by the client hosts. Typical client [settings](#) are as follows:

```
...
[MeshD]
EngineChannel = On
EngineUplink = <server address>
ListenAddress =
...
```

The following settings are specified on the host acting as a local scanning server:

```
EngineChannel = On
EngineUplink =
ListenAddress = <address>:<port>
```

Here, `<server address>` in the uplink connection of the client must refer to the `<address>` and `<port>` that are used by the server host for managing client connections.

Sending files for scanning (File)

This feature is not used (remote scanning is provided by the *Engine* service).



URL checking (Url)

This service allows to check whether a URL belongs to potentially dangerous and unwanted categories: client hosts send a URL to be checked to a server host. Typical client [settings](#) are as follows:

```
...
[MeshD]
UrlChannel = On
UrlUplink = <server address>
ListenAddress =
...
```

The following settings are specified on the host acting as a URL checking server:

```
UrlChannel = On
UrlUplink =
ListenAddress = <address>:<port>
```

Here, *<server address>* in the uplink connection of the client must refer to the *<address>* and *<port>* that are used by the server host for managing client connections.

9.9.2. Command-Line Arguments

To start the Dr.Web MeshD component from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-meshd [<parameters>]
```

Dr.Web MeshD accepts the following parameters:

Parameter	Description
--help	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: -h Arguments: None
--version	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: -v Arguments: None

Example:

```
$ /opt/drweb.com/bin/drweb-meshd --help
```

This command outputs short help information about the Dr.Web MeshD component.



Startup notes

The component cannot be started directly from the command line in standalone mode. The component is started automatically by the [Dr.Web ConfigD](#) configuration management daemon when necessary. To manage the operation parameters of the component, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line.



To start the Dr.Web Ctl tool, run the `drweb-ctl` [command](#).

To get documentation on this component from the command line, run the `man 1 drweb-meshd` command.

9.9.3. Configuration Parameters

The component uses configuration parameters specified in the `[MeshD]` section of the unified [configuration file](#) of Dr.Web Industrial for Linux.

The section contains the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component. If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the <code>[Root]</code> section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-meshd</code>
<code>IdleTimeLimit</code> <i>{time interval}</i>	Maximum idle time for the component. When the specified period of time expires, the component shuts down. Allowed values: from 10 seconds (<code>10s</code>) to 30 days (<code>30d</code>). If the <code>None</code> value is set, the component will operate indefinitely; the <code>SIGTERM</code> signal will not be sent if the component goes idle. Default value: <code>10m</code>
<code>DebugSsh</code> <i>{boolean}</i>	Log or do not log SSH messages (messages and data are transmitted via SSH) received and sent by the Dr.Web MeshD component operating on the host, if the logging level is <code>LogLevel = Debug</code> . Default value: <code>No</code>



Parameter	Description
<code>ListenAddress</code> <code><IP address>:<port></code>	Network socket (address and port) of the client connection where the component is waiting to receive connections from cloud hosts. These hosts are clients of services provided by this cloud host. In order for the component to listen on the IPv6 interface and detect cloud client hosts via IPv6, this parameter must be defined. If the value is not specified, the component does not receive requests from clients. Default value: 0.0.0.0:7090 if the <code>drweb-scanning-server</code> package is installed, not specified otherwise
<code>DnsResolverConfPath</code> <code>{path to file}</code>	Path to a DNS resolver configuration file. Default value: <code>/etc/resolv.conf</code>
<code>DiscoveryResponderPort</code> <code>{port number}</code>	Port on which a higher-level MeshD host responds to client requests via UDP. The <i>discovery</i> mechanism is enabled only if the <code>ListenAddress</code> parameter is defined. Default value: 18008
<code>FileChannel</code> <code>{On Off}</code>	Allow or do not allow the Dr.Web MeshD component operating on this host to participate in file exchange services. If the parameter is set to <code>On</code>, the Dr.Web MeshD component is automatically started by the Dr.Web ConfigD configuration daemon. Default value: <code>On</code>
<code>FileUplink</code> <code>{address}</code>	Address of a higher-level host of Dr.Web MeshD receiving files from this host for scanning. Allowed values: • <i>value is not specified</i>—server is not specified for this service, and Dr.Web MeshD will not establish connections. • <code><IP address>:<port></code>—Dr.Web MeshD will connect to a server with the specified address and port. • <code>dns : <service name> [: <domain>]</code>—address and port of the server are determined by searching for the SRV record of the DNS domain <code><domain></code>. If <code><domain></code> is not specified, the domain from the DNS resolver configuration file is used (the path is specified by <code>ResolverConfPath</code>). The domain is taken from the <code>search</code> and <code>domain</code> fields, depending on which of them is encountered last in the configuration file. • <code>discover</code>—search for a higher-level host using the <i>discovery</i> mechanism. Default value: <i>(not specified)</i>



Parameter	Description
FileDebugIpc {boolean}	Log or do not log the debug information for the file exchange service if the logging level is <code>LogLevel = Debug</code>. Default value: No
EngineChannel {On Off}	Allow or do not allow the Dr.Web MeshD component operating on this host to provide scanning engine services. If the parameter is set to <code>On</code>, the Dr.Web MeshD component is automatically started by the Dr.Web ConfigD configuration daemon. Default value: On
EngineUplink {address}	Address of a higher-level host of Dr.Web MeshD providing scanning engine services for this host. Allowed values: • <i>value is not specified</i>—server is not specified for this service, and Dr.Web MeshD will not establish connections. • <code><IP address>:<port></code>—Dr.Web MeshD will connect to a server with the specified address and port. • <code>dns : <service name> [: <domain>]</code>—address and port of the server are determined by searching for the SRV record of the DNS domain <code><domain></code>. If <code><domain></code> is not specified, the domain from the DNS resolver configuration file is used (the path is specified by <code>ResolverConfPath</code>). The domain is taken from the <code>search</code> and <code>domain</code> fields, depending on which of them is encountered last in the configuration file. • <code>discover</code>—search for a higher-level host using the <i>discovery</i> mechanism. Default value: <i>(not specified)</i>
EngineDebugIpc {boolean}	Log or do not log the debug information for the file exchange service if the logging level is <code>LogLevel = Debug</code>. Default value: No
UrlChannel {On Off}	Allow or do not allow the Dr.Web MeshD component operating on this host to provide URL checking services. Default value: On
UrlUplink {address}	Address of a higher-level host of Dr.Web MeshD providing URL checking services for this host. Allowed values: • <i>value is not specified</i>—URL checking server is not specified. • <code><IP address>:<port></code>—Dr.Web MeshD will connect to a server with the specified address and port.



Parameter	Description
	<code>dns : <service name> [: <domain>]</code>—address and port of the server are determined by searching for the SRV record of the DNS domain <code><domain></code>. If <code><domain></code> is not specified, the domain from the DNS resolver configuration file is used (the path is specified by <code>ResolverConfPath</code>). The domain is taken from the <code>search</code> and <code>domain</code> fields, depending on which of them is encountered last in the configuration file. <code>discover</code>—search for a higher-level host using the <i>discovery</i> mechanism. Default value: <i>(not specified)</i>
<code>UrlDebugIpc</code> <i>{boolean}</i>	Log or do not log the debug information for the URL checking service if the logging level is <code>LogLevel = Debug</code>. Default value: <code>No</code>



The current version of Dr.Web Industrial for Linux does not use the *File* service for sending files for scanning. Use the *Engine* service of the scanning engine instead.



9.10. Dr.Web StatD

The Dr.Web StatD component is designed for accumulating statistics on events that occur during the operation of the Dr.Web Industrial for Linux components. The events are registered in permanent storage and can be obtained on request.

9.10.1. Operating Principles

The Dr.Web StatD component ensures accumulation and permanent storage of events obtained during the operation of Dr.Web Industrial for Linux components. The events related to unexpected component shutdown are logged.

To view and manage events, use the `events` [command](#) of the [Dr.Web Ctl](#) utility.

9.10.2. Command-Line Arguments

To start the Dr.Web StatD component from the command line, run the command:

```
$ /opt/drweb.com/bin/drweb-statd [<parameters>]
```

Dr.Web StatD accepts the following parameters:

Parameter	Description
<code>--help</code>	Function: Output short help information about command-line parameters to the console or the terminal emulator and shut down the component. Short form: <code>-h</code> Arguments: None
<code>--version</code>	Function: Output information about the component version to the console or the terminal emulator and shut down the component. Short form: <code>-v</code> Arguments: None

Example:

```
$ /opt/drweb.com/bin/drweb-statd --help
```

This command outputs short help information about the Dr.Web StatD component.

Startup notes

The component cannot be started directly from the command line in standalone mode. The component is started automatically by the [Dr.Web ConfigD](#) configuration management daemon when necessary. To manage the operation parameters of the component, use the [Dr.Web Ctl](#) tool designed to manage Dr.Web Industrial for Linux from the command line.



To start the Dr.Web Ctl tool, run the `drweb-ctl` [command](#).

To get documentation on this component from the command line, run the `man 1 drweb-statd` command.

9.10.3. Configuration Parameters

The component uses configuration parameters specified in the [StatD] section of the unified [configuration file](#) of Dr.Web Industrial for Linux.

The section contains the following parameters:

Parameter	Description
<code>LogLevel</code> <i>{logging level}</i>	Logging level of the component. If a parameter value is not specified, the <code>DefaultLogLevel</code> parameter value from the [Root] section is used. Default value: <code>Notice</code>
<code>Log</code> <i>{log type}</i>	Logging method of the component. Default value: <code>Auto</code>
<code>ExePath</code> <i>{path to file}</i>	Component executable path. Default value: <code>/opt/drweb.com/bin/drweb-statd</code>
<code>IdleTimeLimit</code> <i>{time interval}</i>	Maximum idle time for the component. When the specified period of time expires, the component shuts down. Allowed values: from 10 seconds (<code>10s</code>) to 30 days (<code>30d</code>). If the <code>None</code> value is set, the component will operate indefinitely; the <code>SIGTERM</code> signal will not be sent if the component goes idle. Default value: <code>10m</code>
<code>RunAsUser</code> <i>{UID user name}</i>	User on behalf of whom the component is started. You can specify either a numerical user identifier (UID) or a user name (login). If the user name consists of numbers (that is, the name is similar to a numerical UID), specify it with the <code>name:</code> prefix, for example, <code>RunAsUser = name:123456</code> . If the user name is invalid, the component shuts down with an error upon startup. Default value: <code>drweb</code>
<code>MaxEventStoreSize</code> <i>{size}</i>	Maximum allowed size of the event database. Defined in <code>mb</code> , for example: <code>MaxEventStoreSize = 100mb</code> . Minimal value: <code>50mb</code> .



Parameter	Description
	Default value: 1GB



10. Appendices

10.1. Appendix A. Types of Computer Threats

In this section

- [Computer viruses](#)
- [Computer worms](#)
- [Trojans](#)
- [Hacktools](#)
- [Adware](#)
- [Jokes](#)
- [Dialers](#)
- [Riskware](#)
- [Suspicious objects](#)

Herein, the term “*threat*” is defined as any kind of software potentially or directly capable of inflicting damage to a computer or network and compromising user information or rights (that is, malicious and other unwanted software). Broadly speaking, the term “*threat*” can be used to indicate any type of potential danger to a computer or network (that is, a vulnerability, which can be used in cyberattacks).

All of the program types stated below are capable of endangering user data or confidentiality. Programs that do not conceal their presence in the system (e.g. spam distribution software or traffic analyzers) are usually not considered computer threats, although they can also harm the user under certain circumstances.

Computer viruses

Computer threats of this type are capable of embedding their code in other programs. Such embedding is called *infection*. In most cases, an infected file becomes a virus carrier and the embedded code does not necessarily match the original one. A significant number of viruses is designed to damage or destroy data.

In Doctor Web classification, viruses are separated by the type of objects they infect:

- *File viruses* infect files of the operating system (usually executable files and dynamic libraries) and are activated when an infected file is started.
- *Macro-viruses* infect documents used by Microsoft® Office (and other applications supporting macros, for example, written in Visual Basic). *Macros* are embedded programs written in a fully functional programming language and can be run in specific conditions (for instance, in Microsoft® Word, macros can be automatically started upon opening, closing or saving a document).



- *Script viruses* are created using script languages and usually infect other script files (e.g. service files of an operating system). They can also infect files of other types that allow execution of scripts and can spread, for example, via vulnerable web applications.
- *Boot viruses* infect boot records of disks and partitions as well as master boot records of hard drives. They do not require much memory and remain ready to continue performing their tasks until the system is unloaded, restarted or shut down.

Most viruses employ certain mechanisms of protection against detection. They are constantly being improved, and ways to cope with them are constantly being developed. All viruses can also be classified according to their type of protection against detection:

- *Encrypted viruses* encrypt their code upon every infection to hinder their detection in a file, a boot sector or memory. All instances of such viruses contain only a short common code fragment (the decryption procedure) that can be used as a signature.
- *Polymorphic viruses* not only encrypt their code, but they also generate a special decryption procedure that is different in every instance of the virus. As a result, such viruses do not have byte signatures.
- *Stealth viruses* (invisible viruses) perform certain actions to disguise their activity and to conceal their presence in infected objects. Such viruses gather the characteristics of an object before infecting it and then pass old data when the operating system or a program scans for modified files.

Viruses can also be classified according to a programming language in which they are written (for example, a low-level language such as an assembly language or a high-level language such as Go) or according to infected operating systems.

Computer worms

Like viruses, programs of the “*computer worm*” type can copy themselves, but they do not infect other objects. A worm gets into a computer from a network (typically as an email attachment or from the internet) and sends its functioning copies to other computers. Worms either rely on user actions or spread automatically.

Worms do not necessarily consist of only one file (the worm body). Many of them have a so called infectious part (the shellcode), which loads into the computer operating memory and then downloads the worm body as an executable file over the network. Until the worm body is downloaded to the system, the worm can be avoided by rebooting the computer (at which the operating memory is reset). However, if the worm body infiltrates the system, then only an anti-virus program can cope with it.

Worms are capable of rendering entire networks inoperable even if these worms do not carry any payload (i.e. do not cause any direct damage to the system).

In Doctor Web classification, worms are separated by their distribution method (environment):

- *Network worms* spread via various network and file sharing protocols.
- *Mail worms* spread via email protocols (POP3, SMTP and so on).



- *Chat worms* spread via popular instant messaging services (ICQ, IM, IRC and so on).

Trojans

Malware of this type cannot reproduce itself. A trojan pretends to be a popular program and performs its functions (or imitates its operation). Meanwhile, it performs some malicious actions (damages or deletes data, sends confidential information and so on) or makes it possible for a hacker to access the computer without permission, for example, in order to harm a third party.

Trojan masking and malicious features are similar to those of a virus. A trojan can even be a component of a virus. However, most trojans spread as separate executable files (through file exchange servers, removable data carriers or email attachments) that are started by users or certain system processes.

It is very hard to classify trojans due to the fact that they are often spread by viruses and worms and also because many malicious actions that can be performed by other types of threats are attributed to trojans only. Here are some trojan types that are classified by Doctor Web as separate classes:

- *Backdoors* are trojans that allow to gain privileged access to a system, bypassing existing access and security measures. Backdoors do not infect files.
- *Rootkits* are used to intercept system functions of an operating system in order to conceal themselves. Furthermore, a rootkit can hide processes of other programs, directories and files. It can spread either as an independent program or as an auxiliary component of another malicious program. There are two kinds of rootkits according to their operation mode: *User Mode Rootkits—UMR* (intercept functions of user mode libraries) and *Kernel Mode Rootkits—KMR* (intercept functions at the system kernel level, which makes them harder to detect and neutralize).
- *Keyloggers* are used to log data that users enter by means of a keyboard. The aim of this is to steal personal information (i.e. network passwords, logins, primary account numbers and so on).
- *Clickers* redefine hyperlinks when they are clicked and thus redirect users to certain websites (sometimes malicious). This is usually done to increase ad traffic of websites or perform distributed denial-of-service (DDoS) attacks.
- *Proxy trojans* provide anonymous internet access to a malicious actor through a victim's computer.

In addition, trojans can also change the start page in a web browser or delete certain files. However, these actions can also be performed by other types of threats (viruses and worms).

Hacktools

Hacktools are programs designed to assist an intruder with hacking. The most common among them are port scanners that detect vulnerabilities in firewalls and other components of a computer protection system. Besides hackers, such tools are used by administrators to test



security of their networks. Occasionally, programs that use social engineering techniques are classified as hacktools.

Adware

Usually, this term refers to program code embedded in freeware programs that forces displaying of advertisements to a user. However, sometimes such code can be distributed via other malicious programs and display advertisements, for example, in web browsers. Many adware programs operate with data collected by spyware.

Jokes

Like adware, this type of malware cannot be used to inflict any direct damage to the system. Joke programs usually just generate messages about errors that never occurred and threaten to perform actions that will lead to data loss. Their purpose is to frighten or annoy users.

Dialers

These are special programs that are designed to scan a range of telephone numbers and find those where a modem answers. These numbers are then used to mark up the price of telephoning facilities or to connect the user to expensive telephone services.

Riskware

These programs were not created for malicious purposes, but due to their characteristics they can pose a threat to the system security. Riskware can accidentally damage or delete data or be used by malicious actors or other programs to harm the system. Riskware includes various remote chat and administrative tools, FTP servers and so on.

Suspicious objects

Suspicious objects include any potential threats detected by a heuristic analyzer. Such objects can potentially relate to any type of computer threats (even unknown to information security specialists) or appear to be safe in case of false positives. It is recommended that files containing suspicious objects are quarantined and sent to Doctor Web anti-virus laboratory experts for analysis.



10.2. Appendix B. Neutralizing Computer Threats

In this section

- [Detection methods](#)
 - [Signature analysis](#)
 - [Origins Tracing™](#)
 - [Execution emulation](#)
 - [Heuristic analysis](#)
- [Threat-related actions](#)

All Doctor Web anti-virus solutions use a set of methods to detect threats, which allows to scan suspicious objects thoroughly.

Detection methods

Signature analysis

This method of detection is the first to run. It is applied by scanning object contents for known threat signatures. A signature is a continuous finite sequence of bytes necessary and sufficient to identify a threat unequivocally. At that, the search for signatures of the objects being scanned is performed using checksums, which allows to reduce virus databases significantly in size having preserved, at the same time, unequivocal matching and correct detection of threats and curing infected objects. Dr.Web virus databases are composed such that the same record can cover entire classes or families of threats.

Origins Tracing™

This unique Dr.Web technology allows to detect new and modified threats using already known infecting and damaging techniques covered by virus databases. The technology is used after completion of the signature analysis and protects users using Dr.Web anti-virus solutions against such threats as the notorious Trojan.Encoder.18 ransomware (also known as gpcode). Furthermore, using the Origins Tracing™ technology allows to considerably reduce the number of false positives of the heuristic analyzer. Objects detected using Origins Tracing™ have the `.Origin` postfix added to their names.

Execution Emulation

The technology of program code emulation is used for detection of polymorphic and encrypted viruses when a search by checksums cannot be performed directly, or is considerably complicated (for example, it is impossible to generate reliable signatures). The method consists in emulating the execution of an analyzed code with an *emulator*—a programming model of a processor and



runtime environment. An emulator operates with a protected memory area (an *emulation buffer*). At that, instructions are not passed to a CPU for actual execution. If the code processed by the emulator is infected, the emulation results in restoring the original malicious code available for signature analysis.

Heuristic analysis

The operation of the heuristic analyzer is based on a set of *heuristics*—assumptions about fingerprints of both malware and safe code, which statistical significance is proved experimentally. Each fingerprint has a certain *weight* (that is, a number which determines a level of its severity and reliability). The weight can be positive if the fingerprint is indicative of malicious behavior or negative if the fingerprint is non-typical for computer threats. Depending on the total weight of contents of an object, the heuristic analyzer calculates a probability of this object containing unknown malware. If a threshold is exceeded, the heuristic analyzer returns a verdict that the analyzed object is malicious.

The heuristic analyzer also uses the FLY-CODE™ technology, which is a versatile algorithm to unpack files. This technology allows to make heuristic assumptions about the presence of malware in objects packed not only by those packers that Dr.Web developers are aware of, but also by new, previously unknown programs. While scanning packed objects, their structural entropy is being analyzed, thereby allowing to detect threats on the basis of the allocation of their code segments. This technology allows to detect multiple different threats packed by the same polymorphous packer on the basis of a single record in a virus database.

As any system of hypothesis testing under uncertainty, the heuristic analyzer can make type I or type II errors (skipping unknown threats or raising false positives correspondingly). Thus, objects detected by the heuristic analyzer are treated as “suspicious”.

While performing any of the scans, Dr.Web anti-virus solutions use the most recent information about all known malware. Threat signatures, footprints and behavioral patterns are updated and added to virus databases as soon as experts of the Doctor Web anti-virus laboratory discover new threats, occasionally several times per hour. Even if the newest malicious program passes Dr.Web real-time protection and penetrates the system, this program will be detected in the list of processes and neutralized after updating virus databases.

Threat-related actions

Dr.Web products implement a number of actions that can be applied to detected objects to neutralize computer threats. The user can keep default actions applied to specific types of threats automatically, adjust these actions or choose the required action manually each time upon detection. Available actions are provided below. The brackets contain a parameter denoting a corresponding action and used in the unified [configuration file](#) and commands of the [Dr.Web Ctl](#) tool.

- **Report** (REPORT)—report the threat without applying any action to the infected object.



- **Cure** (CURE)—attempt to cure the infected object by removing only malicious content from its body.



This action can be applied only to certain types of threats.

- **Quarantine** (QUARANTINE)—put the infected object (if possible) in a specialized quarantine directory to isolate it.
- **Delete** (DELETE)—permanently delete the infected object.



If a threat is detected in a file inside a container (an archive, an email message and so on), the container is quarantined and not deleted.

10.3. Appendix C. Technical Support

If you have a problem installing or using Doctor Web products, please try the following before contacting technical support:

1. Download and review the latest [manuals and guides](#) .
2. See the Frequently Asked Questions [section](#) .
3. Browse the official Doctor Web [forum](#) .

If you haven't found a solution to your problem, you can fill out a web form in the appropriate [section](#)  of the official website to request direct assistance from Doctor Web technical support specialists.

For information on regional and international offices of Doctor Web, please visit the [official website](#) .

To facilitate processing of your issue, we recommend that you generate a data set for the installed product, its configuration, and system environment before contacting our technical support. To do that, you can use a special utility included in Dr.Web Industrial for Linux.

To collect data for our technical support, run the command:

```
# /opt/drweb.com/bin/support-report.sh <path to file>
```

where *<path to file>*—path to an archive in the `.tgz` format to which the debugging information about the product and the system environment will be written, for example, `/tmp/report.tgz`. Already existing files will not be rewritten. If the path is not specified, the archive will be stored in the directory of the superuser who started the utility (for example, `/root`) and will be named as follows:

```
drweb.report.<timestamp>.tgz
```

where *<timestamp>* is a full timestamp of creating the report, down to milliseconds, for example: 20190618151718.23625.



The utility for collecting data for our technical support must be run with superuser (*root*) privileges. To get superuser privileges, use the `su` command to change the user or the `sudo` command to run the command as another user.

During operation, the utility collects and archives the following information:

- information about your OS (name, architecture, output of the `uname -a` command);
- list of packages installed on your system, including Doctor Web packages;
- log contents:
 - Dr.Web Industrial for Linux logs (if configured for separate components);
 - log of the `syslog` system daemon (`/var/log/syslog`, `/var/log/messages`);
 - log of a system package manager (`apt`, `yum`, etc.);
 - `dmesg` log;
- output of the commands `df`, `ip a` (`ifconfig -a`), `ldconfig -p`, `iptables-save`, `nft export xml`.
- information about settings and configuration of Dr.Web Industrial for Linux:
 - list of downloaded virus databases (`drweb-ctl baseinfo -l`);
 - list of files from Dr.Web Industrial for Linux directories and MD5 hash values of these files;
 - Dr.Web Virus-Finding Engine version and MD5 hash value;
 - information about the user and permissions retrieved from the key file, if Dr.Web Industrial for Linux is not running in centralized protection mode.



10.4. Appendix D. Dr.Web Industrial for Linux Configuration File

Configuration parameters of all Dr.Web Industrial for Linux components are managed by the Dr.Web ConfigD configuration management daemon. Changed parameters are stored in the `drweb.ini` file whose default directory is `/etc/opt/drweb.com/`.



The text configuration file stores only those parameters whose values differ from defaults. If a parameter is absent in the configuration file, its default value is used.

View the list of all available parameters, including those that are absent in the configuration file and have default values, by running the [command](#):

```
$ drweb-ctl cfshow
```

You can change any parameter value in two ways:

- By running the [command](#):

```
# drweb-ctl cfset <section>.<parameter> <new value>
```



This command requires to run the Dr.Web Ctl management tool with superuser (the *root* user) privileges. To obtain superuser privileges, use the `su` or `sudo` command.

For further information about the syntax of the `cfshow` and `cfset` commands of the Dr.Web Ctl tool (the `drweb-ctl` module), refer to the [Dr.Web Ctl](#) section.

- By specifying this parameter in the configuration file (by editing the file in any text editor) and reloading the configuration of Dr.Web Industrial for Linux to apply changes by running the [command](#):

```
# drweb-ctl reload
```

10.4.1. File Structure

The configuration file complies with the rules indicated below.

- The file content is separated into named sections. Allowed section names are strictly set and cannot be arbitrary. A section name is specified in square brackets and is identical to the name of the Dr.Web Industrial for Linux component that uses parameters of this section (except for the `[Root]` [section](#), which stores parameters of the Dr.Web ConfigD configuration daemon).
- The `;` or `#` characters in the beginning of the lines of the configuration file indicate a comment. Such lines are skipped by Dr.Web Industrial for Linux components while reading configuration parameters from the configuration file.
- Each line in the file can contain only one parameter:

```
<parameter> = <value>
```



- All parameter names are strictly set and cannot be arbitrary.
- All section and parameter names are case-insensitive. Parameter values, except for names of directories and files in paths (for Unix-like OSes), are also case-insensitive.
- Parameter values in the configuration file must be enclosed in quotation marks if these values contain spaces.
- Some parameters can accept multiple values. If so, the values are either comma-separated or specified several times in different lines of the configuration file. In the former case, spaces around a comma are ignored. If a space character is a part of a parameter value, the entire value must be enclosed in quotation marks.

You can specify multiple values as:

- a comma-separated list:

```
Parameter = "Value1", "Value2", "Value 3"
```

- a sequence of lines in the configuration file:

```
Parameter = Value2  
Parameter = Value1  
Parameter = "Value 3"
```

The order of values is unimportant.



Paths to files are always enclosed in quotation marks when separated by commas, for example:

```
ExcludedPaths = "/etc/file1", "/etc/file2"
```

For the description of the sections of the configuration file, see the description of the Dr.Web Industrial for Linux components using it.

10.4.2. Parameter Types

Configuration parameters can be of the following types:

1. *Address*—network connection address specified as `<IPv4 address>:<port>` or `<IPv6 address>:<port>`. Use square brackets to set an IPv6 address value. In some cases the port can be omitted (in each case this is indicated in the description of the parameter).
2. *Boolean*—flag parameter accepting `On`, `Yes`, `True` (the parameter is enabled) and `Off`, `No`, `False` (the parameter is disabled).
3. *Integer*—non-negative integer.
4. *Fractional number*—non-negative number with a fractional part can be indicated as a parameter value.
5. *Time interval*—time interval consisting of a non-negative integer and a suffix character indicating the specified unit of measurement. The following suffixes representing units of measurement can be used:
 - `w`—weeks (1w = 7d);
 - `d`—days (1d = 24h);
 - `h`—hours (1h = 60m);



- m—minutes (1m = 60s);
- s or no suffix—seconds.

If the time interval is specified in seconds, you can specify milliseconds after a point (no more than three digits, for example, 0.5s—500 milliseconds). It is possible to specify multiple time intervals in different time units as a single time interval; in this case, it is counted as a sum of intervals (in fact, the configuration parameters always store a number of milliseconds covered by this time interval).

In general terms, any time interval can be represented by the following expression: $N_1wN_2dN_3hN_4mN_5[N_6]s$, where $N_1, \dots, N_6$ is a number of the corresponding time units included in this interval. For example, a year (365 days) can be represented as follows (all records are equivalent): 365d, 52w1d, 52w24h, 51w7d24h, 51w7d23h60m, 8760h, 525600m, 31536000s.

The examples below show you how intervals of 30 minutes, 2 seconds, 500 milliseconds can be specified:

- in the configuration file:

```
UpdateInterval = 30m2.5s
```

- by running the `drweb-ctl cfset` [command](#):

```
# drweb-ctl cfset Update.UpdateInterval 1802.5s
```

- via a command-line parameter (for example, for the [scanning engine](#)):

```
# /opt/drweb.com/bin/drweb-se <socket> --WatchdogInterval 1802.5
```

6. *Size*—the parameter value represents a size of an object (a file, a buffer, a cache, and so on), specified as a non-negative integer and a suffix representing a measurement unit. The following suffixes that specify size units can be used:

- GB—gigabytes (1GB = 1024MB);
- MB—megabytes (1MB = 1024KB);
- KB—kilobytes (1KB = 1024B);
- B—bytes.

If a suffix is omitted, the size is considered to be in bytes. A single size record can be specified by multiple sizes in different units; in this case, the resulting size is counted as their sum (in fact, the configuration parameters always store the size in bytes).

7. *Path to directory (file)*—the parameter value is a string representing an acceptable path to a directory (a file).



The file path must be ended with a file name.



On Unix-like operating systems, names of directories and files are case-sensitive. If it is not explicitly mentioned in a parameter description, paths cannot be represented by masks with special characters (?, *).



8. *Logging level*—level at which the Dr.Web Industrial for Linux component events are logged. The following values are allowed:
- *Debug*—the most detailed logging level. All messages and debug information are logged.
 - *Info*—all messages are logged.
 - *Notice*—all error messages, warnings and notifications are logged.
 - *Warning*—all error messages and warnings are logged.
 - *Error*—only error messages are logged.
9. *Log type*—the parameter value specifies the Dr.Web Industrial for Linux component logging method. The following values are allowed:
- `Stderr[:ShowTimestamp]`—messages are output to *stderr* (standard error stream). This value can be used *only* in the settings of the configuration daemon. At that, if it works in the background ("*daemonized*"), i.e. it is started with the `-d` parameter, this value *cannot* be used because components operating in the background cannot access input/output streams of the terminal). The additional `ShowTimestamp` parameter instructs to add a timestamp to every message.
 - *Auto*—messages for logging are passed to the Dr.Web ConfigD configuration daemon, which stores them in a single location specified in its own settings (the `Log` parameter in the `[Root]` section). This value is specified for all components *except for the configuration daemon* and is used as a default value.
 - `Syslog[:<facility>]`—the component will pass messages to the `syslog` system logging service.
 - The additional `<facility>` option is used to specify a type of a log to store messages logged by `syslog`. Allowed values:
 - *Daemon*—messages from daemons,
 - *User*—messages from user processes,
 - *Mail*—messages from mail programs,
 - *Local0*—messages from local processes 0,
 - ...
 - *Local7*—messages from local processes 7.
 - `<path to file>`—messages will be stored by the component directly in the specified log.

Examples of how to specify a parameter value:

- in the configuration file:

```
Log = Stderr:ShowTimestamp
```

- by running the `drweb-ctl cfset` [command](#):

```
# drweb-ctl cfset Root.Log /tmp/log
```

- via a command-line parameter (for example, for the [scanning engine](#)):

```
# /opt/drweb.com/bin/drweb-se <socket> --Log Syslog:DAEMON
```



10. *Action*—action to be applied by the Dr.Web Industrial for Linux component upon detection of certain threats or upon another event. Allowed values:

- **Report** (`REPORT`)—only notify of threat detection without applying other actions;
- **Cure** (`CURE`)—attempt to cure the threat (that is, remove only malicious content from the file body);
- **Quarantine** (`QUARANTINE`)—put the infected file in quarantine;
- **Delete** (`DELETE`)—delete the infected file.



Some of the actions can be applied only upon certain events (for example, a “Scanning error” event cannot trigger the `CURE` action). Allowed actions are always listed in the description of each parameter of the *action* type.

Other types of parameters and their allowed values are explicitly specified in the description of these parameters.



10.5. Appendix E. Generating SSL Certificates

For the Dr.Web Industrial for Linux components that use a secure SSL/TLS data channel and application protocols, such as HTTPS, LDAPS, SMTPS and so on, to exchange data, it is necessary to provide private SSL keys and the corresponding certificates. Keys and certificates for some components are generated automatically; as for the others, they should be provided by a Dr.Web Industrial for Linux user. All the components use certificates in the PEM format.

To generate private keys and certificates used for connections via SSL/TLS, including verification certificates of Certification Authority (CA) and signed certificates, you can use the `openssl` command-line utility (included in the OpenSSL cryptographic package).

Consider a sequence of actions required for generating a private key and the corresponding SSL certificate together with an SSL certificate signed with a CA verification certificate.

To generate a private SSL key and a certificate

1. To generate a private key (the RSA algorithm, the key length is 2048 bits), run the command:

```
$ openssl genrsa -out keyfile.key 2048
```

If you want to password protect the key, use the `-des3` option. The generated key is in the `keyfile.key` file located in the current directory.

To view the generated key, run the command:

```
$ openssl rsa -noout -text -in keyfile.key
```

2. To generate a certificate for a specified time period based on the existing private key (in this case, for 365 days), run the command:

```
$ openssl req -new -x509 -days 365 -key keyfile.key -out certificate.crt
```



This command will request data (a name, an organization and so on) that identify the certified object. The generated certificate will be located in the `certificate.crt` file.

To scan the contents of the generated certificate, run the command:

```
$ openssl x509 -noout -text -in certificate.crt
```

To register a certificate as a trusted CA certificate

1. Move or copy the certificate file to the system trusted certificate directory (`/etc/ssl/certs` on Debian or Ubuntu).
2. In the trusted certificate directory, create a symbolic link to the certificate, where the name of the link is the hash value of the certificate.
3. Reindex the contents of the system directory containing certificates.



The example commands provided below perform all these three actions. It is assumed that the current directory is the trusted certificate directory `/etc/ssl/certs` and the certificate that is registered as a trusted one is located in the `/home/user/ca.crt` file:

```
# cp /home/user/ca.crt .  
# ln -s ca.crt `openssl x509 -hash -noout -in ca.crt`.0  
# c_rehash /etc/ssl/certs
```

To create a signed certificate

1. Generate a request file for signing a certificate (*Certificate Signing Request—CSR*) based on an existing private key. If the key is absent, generate it.

The request for signing is created by running the command:

```
$ openssl req -new -key keyfile.key -out request.csr
```

This command, as well as the command for certificate creation, requests data that identifies the certified object. Here, `keyfile.key` is the existing file of the private key. The received request will be saved to the `request.csr` file.

To check the result of request creation, run the command:

```
$ openssl req -noout -text -in request.csr
```

2. To create a signed certificated based on the request and the existing CA certificate, run the command:

```
$ openssl x509 -req -days 365 -CA ca.crt -CAkey ca.key -set_serial 01 -in  
request.csr -out sigcert.crt
```



To create a signed certificate, you must have the following three files: the file of the root certificate `ca.crt` and its private key `ca.key` (the `certificate.crt` certificate and the `keyfile.key` key may be used instead of `ca.crt` and `ca.key`, then the obtained certificate will be self-signed), as well as the request for signing `request.csr`. The created signed certificate will be saved to the file `sigcert.crt`.

To check the result, run the command:

```
$ openssl x509 -noout -text -in sigcert.crt
```

Repeat the procedure of creating a key and a certificate (or a signed certificate, if necessary) as many times as the number of unique certificates you need to create. For example, from a security point of view, every agent for distributed file scanning by Dr.Web Network Checker within a scanning cluster should have its own key/certificate pair.

To convert a signed certificate

Some browsers or mail clients may require to convert the signed certificate used for authorization to the PKCS12 format.

Perform such conversion by running the command:

```
# openssl pkcs12 -export -in sigcert.crt -out sigcert.pfx -inkey keyfile.key
```



Here, `sigcert.crt` is the existing file of the signed certificate, `keyfile.key` is the file of the corresponding private key. The resulting converted certificate is saved to the `sigcert.pfx` file.



10.6. Appendix F. Known Errors

In this section

- [Recommendations for error identification](#)
- [Error codes](#)
- [Errors without a code](#)



If the occurred error is not present in this section, it is recommended that you contact our [technical support](#). Be ready to provide the error code and describe steps to reproduce the issue.

Recommendations for error identification

- To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log command`.
- To identify errors, we recommend that you store output of the log in a separate file and enable output of detailed debug information. For that, run the [commands](#):

```
# drweb-ctl cfset Root.Log <log path>
# drweb-ctl cfset Root.DefaultLogLevel DEBUG
```

- To reset the logging settings to defaults, run the commands:

```
# drweb-ctl cfset Root.Log -r
# drweb-ctl cfset Root.DefaultLogLevel -r
```

Error codes

Error message: *Error on monitor channel*

Error code: x1

Internally used name: EC_MONITOR_IPC_ERROR

Description: One or several components cannot connect to the [Dr.Web ConfigD](#) configuration daemon.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log command`.

Troubleshooting

1. Restart the configuration daemon:

```
# service drweb-configd restart
```

2. Check whether the authentication mechanism for PAM is installed, configured and operates correctly. If necessary, install and configure it (for details refer to administration manuals for your OS distribution).
3. If PAM is configured correctly and restarting the configuration daemon does not help, reset Dr.Web



Industrial for Linux settings to defaults.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save  
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

4. If it is not possible to start the configuration daemon, reinstall the `drweb-configd` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Operation is already in progress*

Error code: `x2`

Internally used name: `EC_ALREADY_IN_PROGRESS`

Description: The operation is already in progress.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

Wait for the operation to finish. If necessary, repeat the required action later.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Operation is in pending state*

Error code: `x3`

Internally used name: `EC_IN_PENDING_STATE`

Description: An operation requested by the user is in a pending state (possibly, a network connection is currently being established or one of the components is starting and initializing, which may take a long time).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

Wait for the operation to start. If necessary, repeat the required action later.

If the error persists, contact our [technical support](#) and provide the error code.



Error message: *Interrupted by user*

Error code: x4

Internally used name: EC_INTERRUPTED_BY_USER

Description: The action has been terminated by the user (possibly, it was taking a long time).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Repeat the required action later.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Operation canceled*

Error code: x5

Internally used name: EC_CANCELED

Description: The action has been canceled.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Repeat the required action.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *IPC connection terminated*

Error code: x6

Internally used name: EC_LINK_DISCONNECTED

Description: An IPC connection to one of the Dr.Web Industrial for Linux components has been terminated (possibly, the component was shut down due to being idle or by a user request).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

If the operation did not finish, repeat it later. Otherwise, the connection termination is not an error.

If the error persists, contact our [technical support](#) and provide the error code.



Error message: *Invalid IPC message size*

Error code: x7

Internally used name: EC_BAD_MESSAGE_SIZE

Description: A message of an invalid size has been received during component inter-process communication (IPC).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Restart Dr.Web Industrial for Linux:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid IPC message format*

Error code: x8

Internally used name: EC_BAD_MESSAGE_FORMAT

Description: A message of an invalid format has been received during component inter-process communication (IPC).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Restart Dr.Web Industrial for Linux:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Not ready*

Error code: x9

Internally used name: EC_NOT_READY

Description: The required action cannot be performed because the necessary component or device has not been initialized yet.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).



Troubleshooting

Repeat the required action later.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Component is not installed*

Error code: x10

Internally used name: EC_NOT_INSTALLED

Description: The component necessary for running the required function is not installed.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

1. Install or reinstall the necessary component. If you do not know the component name, try to determine it from the log file.
2. If the installation or reinstallation of the necessary component does not help, reinstall Dr.Web Industrial for Linux.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Unexpected IPC message*

Error code: x11

Internally used name: EC_UNEXPECTED_MESSAGE

Description: An invalid message has been received during component inter-process communication (IPC).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Restart Dr.Web Industrial for Linux by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *IPC protocol violation*



Error code: x12

Internally used name: EC_PROTOCOL_VIOLATION

Description: A protocol violation has occurred during component inter-process communication (IPC).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Restart Dr.Web Industrial for Linux by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Subsystem state is unknown*

Error code: x13

Internally used name: EC_UNKNOWN_STATE

Description: The required operation cannot be performed because a subsystem of Dr.Web Industrial for Linux is in an unknown state.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

1. Repeat the operation.
2. If the error persists, restart Dr.Web Industrial for Linux by running the command:

```
# service drweb-configd restart
```

and repeat the operation afterwards.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Path must be absolute*

Error code: x20

Internally used name: EC_NOT_ABSOLUTE_PATH

Description: A relative path to a file or a directory has been specified, whereas an absolute path is required.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.



Troubleshooting

Make the file or directory path absolute and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Not enough memory*

Error code: x21

Internally used name: EC_NO_MEMORY

Description: Not enough memory to complete the requested operation.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log` [command](#).

Troubleshooting

Increase the size of the memory available for Dr.Web Industrial for Linux processes (for example, by changing the limits using the `ulimit` command), restart Dr.Web Industrial for Linux and repeat the operation.



In some cases the `systemd` system service can ignore the specified limit changes. In this case, edit (or create if it does not exist) the file `/etc/systemd/system/drweb-configd.service.d/limits.conf` and indicate the changed limit value in it, for example:

```
[Service]
LimitDATA=32767
```

Available `systemd` limits can be determined using the `man systemd.exec` command.

Restart Dr.Web Industrial for Linux by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *I/O error*

Error code: x22

Internally used name: EC_IO_ERROR

Description: An input/output error has occurred (for example, a disk device has not been initialized yet or a partition of the file system is not available anymore).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log` [command](#).

**Troubleshooting**

Ensure the availability of the required I/O device or partition of the file system and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *No such file or directory*

Error code: x23

Internally used name: EC_NO_SUCH_ENTRY

Description: An attempt to access a non-existent file or directory has been made.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check the indicated path. If necessary, correct it and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Permission denied*

Error code: x24

Internally used name: EC_PERMISSION_DENIED

Description: Insufficient privileges to access the specified file or directory.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Ensure that the path is correct and the component has the required privileges. If access to the object is denied, change its permissions or elevate component privileges and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Not a directory*

Error code: x25

Internally used name: EC_NOT_A_DIRECTORY

Description: The specified object of the file system is not a directory.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-`



```
ctl log command.
```

Troubleshooting

Check the object path. Specify the correct path and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Data file corrupted*

Error code: x26

Internally used name: EC_DATA_CORRUPTED

Description: The requested data is corrupted.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drweb-ctl log [command](#).

Troubleshooting

1. Repeat the operation.
2. If the error persists, restart Dr.Web Industrial for Linux:

```
# service drweb-configd restart
```

and repeat the operation afterwards.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *File already exists*

Error code: x27

Internally used name: EC_FILE_EXISTS

Description: A file with the same name already exists.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drweb-ctl log [command](#).

Troubleshooting

Check the file path. If necessary, correct it and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Read-only file system*

Error code: x28

Internally used name: EC_READ_ONLY_FS



Description: The file system is read-only.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check the object path. Change it so as to indicate a writable partition of the file system and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Network error*

Error code: x29

Internally used name: EC_NETWORK_ERROR

Description: A network error has occurred (possibly, a remote host stopped responding unexpectedly or required connection failed).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check that the network is available and network settings are correct. If necessary, change the network settings and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Not a drive*

Error code: x30

Internally used name: EC_NOT_A_DRIVE

Description: The input/output device being accessed is not a disk device.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check the specified device name. Correct the path so as to indicate a disk device and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.



Error message: *Unexpected EOF*

Error code: x31

Internally used name: EC_UNEXPECTED_EOF

Description: The end of the file has been reached unexpectedly while reading data.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check the specified file name. If necessary, correct the path so as to indicate the correct file and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *File was changed*

Error code: x32

Internally used name: EC_FILE_WAS_CHANGED

Description: The file being scanned has been modified.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Repeat scanning.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Not a regular file*

Error code: x33

Internally used name: EC_NOT_A_REGULAR_FILE

Description: The file system object being accessed is not a regular file (it may a directory, a socket and so on).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check the specified file name. If necessary, change the path so as to indicate a regular file and repeat the operation.



If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Name already in use*

Error code: x34

Internally used name: EC_NAME_ALREADY_IN_USE

Description: A file with the same name already exists.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check the specified path. Correct it and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Host is offline*

Error code: x35

Internally used name: EC_HOST_OFFLINE

Description: A remote host cannot be accessed over the network.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check that the required host is available. If necessary, correct the host address and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Resource limit reached*

Error code: x36

Internally used name: EC_LIMIT_REACHED

Description: A limit on resource usage has been reached.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

Check the availability of the required resource. If necessary, raise the limit on the usage of this resource



and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Mounting points are different*

Error code: x37

Internally used name: EC_CROSS_DEVICE_LINK

Description: Restoring the file implies moving it between two different mount points.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Choose another path for restoring the file and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Unpacking error*

Error code: x38

Internally used name: EC_UNPACKING_ERROR

Description: Unable to unpack an archive (it may be password-protected or corrupted).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Make sure that the archive is not corrupted. If the archive is protected with a password, remove the protection having entered the correct password and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Virus database corrupted*

Error code: x40

Internally used name: EC_BASE_CORRUPTED

Description: Virus databases are corrupted.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).



Troubleshooting

1. Check the path to the virus database directory. Change the path, if necessary (the `VirusBaseDir` parameter in the [Root] [section](#) of the [configuration file](#)). You can use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Root.VirusBaseDir
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Root.VirusBaseDir <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Root.VirusBaseDir -r
```

2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Non-supported virus database version*

Error code: x41

Internally used name: `EC_OLD_BASE_VERSION`

Description: Current virus databases are intended for an earlier program version.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the virus database directory. Change the path, if necessary (the `VirusBaseDir` parameter in the [Root] [section](#) of the [configuration file](#)). You can use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Root.VirusBaseDir
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Root.VirusBaseDir <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Root.VirusBaseDir -r
```

2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.



Error message: *Empty virus database*

Error code: x42

Internally used name: EC_EMPTY_BASE

Description: The virus database is empty.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

1. Check the path to the virus database directory. Change the path, if necessary (the VirusBaseDir parameter in the [Root] [section](#) of the [configuration file](#)). You can use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drwebctl cfshow Root.VirusBaseDir
```

To set a new parameter value, run the [command](#):

```
# drwebctl cfset Root.VirusBaseDir <new path>
```

To reset the parameter to its default value, run the command:

```
# drwebctl cfset Root.VirusBaseDir -r
```

2. Update virus databases: run the [command](#):

```
$ drwebctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Object cannot be cured*

Error code: x43

Internally used name: EC_CAN_NOT_BE_CURED

Description: The **Cure** action has been applied to an incurable object.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Select an action that can be applied to this object and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Non-supported virus database combination*

Error code: x44

Internally used name: EC_INVALID_BASE_SET



Description: Incompatible virus databases.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the virus database directory. Change the path, if necessary (the `VirusBaseDir` parameter in the [Root] [section](#) of the [configuration file](#)). You can use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Root.VirusBaseDir
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Root.VirusBaseDir <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Root.VirusBaseDir -r
```

2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Scan limit reached*

Error code: x45

Internally used name: `EC_SCAN_LIMIT_REACHED`

Description: The specified limits have been exceeded during object scanning (for example, on the size of an unpacked file, on the nesting depth and so on).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).

Troubleshooting

1. Change the scanning limits (in the component settings) using the `drweb-ctl cfshow` and `drweb-ctl cfset` [commands](#).
2. After changing the settings, repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Authentication failed*

Error code: x47

Internally used name: `EC_AUTH_FAILED`

Description: Invalid user credentials have been used for authentication.



To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

Provide valid credentials of a user having required privileges and try to authenticate again.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Authorization failed*

Error code: x48

Internally used name: EC_NOT_AUTHORIZED

Description: The current user has insufficient privileges for performing the requested operation.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

Provide valid credentials of a user having required privileges and try to authorize again.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Access token is invalid*

Error code: x49

Internally used name: EC_INVALID_TOKEN

Description: A component of Dr.Web Industrial for Linux has provided an invalid authorization token in an attempt to execute an operation requiring elevated privileges.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

Authenticate by providing valid credentials of a user having required privileges and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid argument*

Error code: x60

Internally used name: EC_INVALID_ARGUMENT

Description: Unable to run the command since an invalid argument has been provided.



To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

1. Check the command syntax and format.
2. Repeat the required action having indicated a valid argument.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid operation*

Error code: x61

Internally used name: EC_INVALID_OPERATION

Description: An attempt to run an invalid command has been made.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

Repeat the required action using a valid command.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Superuser privileges required*

Error code: x62

Internally used name: EC_ROOT_ONLY

Description: Superuser privileges are required to perform the required action.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

Elevate you privileges to superuser ones and repeat the required action. To elevate the privileges, use the `su` or `sudo` command.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Not allowed in centralized protection mode*

Error code: x63



Internally used name: EC_STANDALONE_MODE_ONLY

Description: The required action can be performed only when Dr.Web Industrial for Linux operates in standalone [mode](#).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Switch Dr.Web Industrial for Linux to the standalone mode and repeat the operation.

To switch Dr.Web Industrial for Linux to the standalone mode run the [command](#):

```
# drwebctl esdisconnect
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Non-supported OS*

Error code: x64

Internally used name: EC_NON_SUPPORTED_OS

Description: Dr.Web Industrial for Linux does not support the operating system installed on the host.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Install an operating system from the list provided in [system requirements](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Feature not implemented*

Error code: x65

Internally used name: EC_UNKNOWN_OPTION

Description: The required features of the component are not implemented in the current version.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Try to reset the settings of Dr.Web Industrial for Linux to defaults.

To do this, clear the contents of the file /etc/opt/drweb.com/drweb.ini (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save
```



```
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Unknown option*

Error code: x66

Internally used name: EC_UNKNOWN_OPTION

Description: The [configuration file](#) contains parameters that are unknown to or not supported by the current version of Dr.Web Industrial for Linux.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.

Troubleshooting

1. Open the file `/etc/opt/drweb.com/drweb.ini` in any text editor, remove the line containing the invalid parameter. Save the file and restart the [Dr.Web ConfigD](#) configuration daemon by running the command:

```
# service drweb-configd restart
```

2. If this does not help, reset Dr.Web Industrial for Linux settings to defaults.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Unknown section*

Error code: x67

Internally used name: EC_UNKNOWN_SECTION

Description: The [configuration file](#) contains sections unknown to or not supported by the current version of Dr.Web Industrial for Linux.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drwebctl log command`.



Troubleshooting

1. Open the file `/etc/opt/drweb.com/drweb.ini` in any text editor, remove the unknown (unsupported) section. Save the file and restart the [Dr.Web ConfigD](#) configuration daemon by running the command:

```
# service drweb-configd restart
```

2. If this does not help, reset Dr.Web Industrial for Linux settings to defaults.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid option value*

Error code: x68

Internally used name: EC_INVALID_OPTION_VALUE

Description: One or more parameters in the configuration file have invalid values.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log command`.

Troubleshooting

1. Set the parameter value using the `drweb-ctl cfshow` and `drweb-ctl cfset commands`.

If you do not know which value is valid for the parameter, refer to a man page for the component which uses this parameter. You can also restore a default value of the parameter.

2. You can also directly edit the configuration file `/etc/opt/drweb.com/drweb.ini`. To do this, open it in any text editor, find the line containing an invalid parameter value, set a valid value, then save the file and restart the [Dr.Web ConfigD](#) configuration daemon by running the command:

```
# service drweb-configd restart
```

3. If the previous steps did not help, reset Dr.Web Industrial for Linux settings to defaults.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```



If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid state*

Error code: x69

Internally used name: EC_INVALID_STATE

Description: Dr.Web Industrial for Linux or one of its components is in an invalid state and cannot complete the required operation.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

1. Repeat the required action later.
2. If the error persists, restart Dr.Web Industrial for Linux by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Only one value allowed*

Error code: x70

Internally used name: EC_NOT_LIST_OPTION

Description: A list of values is set for a single-valued parameter in the configuration file.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

1. Set the parameter value using the `drwebctl cfshow` and `drwebctl cfset commands`.

If you do not know which value is valid for the parameter, refer to a man page for the component which uses this parameter. You can also restore a default value of the parameter.

2. You can also directly edit the configuration file `/etc/opt/drweb.com/drweb.ini`. To do this, open it in any text editor, find the line containing an invalid parameter value, set a valid value, then save the file and restart the [Dr.Web ConfigD](#) configuration daemon by running the command:

```
# service drweb-configd restart
```

3. If the previous steps did not help, reset Dr.Web Industrial for Linux settings to defaults.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save  
# echo "" > /etc/opt/drweb.com/drweb.ini
```



After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Record not found*

Error code: x80

Internally used name: EC_RECORD_NOT_FOUND

Description: The threat record is missing (it may have already been processed by another component).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Update the threat list later.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Record is in process now*

Error code: x81

Internally used name: EC_RECORD_BUSY

Description: The threat is already being processed by another component.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Update the threat list later.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *File has already been quarantined*

Error code: x82

Internally used name: EC_QUARANTINED_FILE

Description: The file is already in quarantine. Probably, another component has already processed the threat.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).



Troubleshooting

Update the threat list later.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Update zone is not provided on disk*

Error code: x84

Internally used name: EC_NO_ZONE_ON_DISK

Description: An attempt to update the virus bases in offline mode was unsuccessful.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

1. Make sure that the path to the device used for updating is correct.
2. Make sure that the user as whom you are trying to update has read permissions for the directory with updates.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Cannot backup before update*

Error code: x89

Internally used name: EC_BACKUP_FAILED

Description: Prior to downloading updates from an update server, an attempt to make a backup copy of the files to be updated has failed.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

1. Check the path to the directory that stores backup copies of the files to be updated. Change the path, if necessary (the BackupDir parameter in the [Update] [section](#) of the [configuration file](#)).
 - To view and change the path, use the the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drwebctl cfshow Update.BackupDir
```

To set a new parameter value, run the [command](#):

```
# drwebctl cfset Update.BackupDir <new path>
```

To reset the parameter to its default value, run the command:

```
# drwebctl cfset Update.BackupDir -r
```



2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

3. If the error persists, check whether the user as whom the component is running has write permissions for a directory specified in the `BackupDir` parameter. The name of this user is specified in the `RunAsUser` parameter. If necessary, change the user specified in the `RunAsUser` parameter or grant the lacking permissions in the directory attributes.
4. If the error persists, reinstall the `drweb-update` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid DRL file*

Error code: x90

Internally used name: `EC_BAD_DRL_FILE`

Description: The integrity of one of the files storing a list of update servers is violated.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the file storing the list of servers and change the path if necessary (parameters containing `*DrlDir` in the [Update] [section](#) of the [configuration file](#)). Use the the command-line [management tool](#).

To view the current parameter value, run the [command](#) (replace `<*DrlDir>` with a specific parameter name. If the parameter name is unknown, view all parameter values in the section, skipping the command part in square brackets):

```
$ drweb-ctl cfshow Update[.<*DrlDir>]
```

To set a new parameter value, run the [command](#) (replace `<*DrlDir>` with a specific parameter name):

```
# drweb-ctl cfset Update.<*DrlDir> <new path>
```

To restore the default parameter value, run the command (replace `<*DrlDir>` with a specific parameter name):

```
# drweb-ctl cfset Update.<*DrlDir> -r
```

2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

3. If the error persists, reinstall the `drweb-update` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.



Error message: *Invalid LST file*

Error code: x91

Internally used name: EC_BAD_LST_FILE

Description: The integrity of the file storing a list of virus databases to be updated is violated.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).

Troubleshooting

1. Update virus databases again after some time: run the [command](#):

```
$ drweb-ctl update
```

2. If the error persists, reinstall the `drweb-update` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid compressed file*

Error code: x92

Internally used name: EC_BAD_LZMA_FILE

Description: The integrity of the downloaded file containing updates is violated.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).

Troubleshooting

Update virus databases again after some time: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Proxy authentication error*

Error code: x93

Internally used name: EC_PROXY_AUTH_ERROR

Description: Unable to connect to update servers via the proxy server specified in the settings.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).



Troubleshooting

1. Check the parameters used to connect to the proxy server (set with the `Proxy` parameter in the [Update] [section](#) of the [configuration file](#)).

- Use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Update.Proxy
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Update.Proxy <new parameters>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Update.Proxy -r
```

2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *No update servers available*

Error code: x94

Internally used name: EC_NO_UPDATE_SERVERS

Description: Unable to connect to any of the update servers.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check if the network is available. Change network settings if necessary.
2. If you can access the network only using a proxy server, configure connection to the proxy server (the `Proxy` parameter in the [Update] [section](#) of the [configuration file](#)).

- Use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Update.Proxy
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Update.Proxy <new parameters>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Update.Proxy -r
```

3. If the network connection parameters (including the parameters of the proxy server) are correct, but the error persists, make sure that you use a relevant list of update servers. The list of used update servers is set in `*Dr1Dir` parameters in the [Update] [section](#) of the configuration file.



If `*CustomDr1Dir` parameters indicate an existing valid file storing a list of servers, the servers specified there will be used instead of the servers of the standard update zone (the value specified in the corresponding `*Dr1Dir` parameter is ignored).

- Use the the command-line [management tool](#).

To view the current parameter value, run the [command](#) (replace `<*Dr1Dir>` with a specific parameter name. If the parameter name is unknown, view all parameter values in the section, skipping the command part in square brackets):

```
$ drweb-ctl cfshow Update[.<*Dr1Dir>]
```

To set a new parameter value, run the [command](#) (replace `<*Dr1Dir>` with a specific parameter name):

```
# drweb-ctl cfset Update.<*Dr1Dir> <new path>
```

To restore the default parameter value, run the command (replace `<*Dr1Dir>` with a specific parameter name):

```
# drweb-ctl cfset Update.<*Dr1Dir> -r
```

4. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid key file format*

Error code: x95

Internally used name: EC_BAD_KEY_FORMAT

Description: The key file format is violated.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check that you have a key file and a correct path to it. You can specify the path to the key file in the `KeyPath` parameter in the [Root] [section](#) of the [configuration file](#). Use the the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Root.KeyPath
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Root.KeyPath <path to file>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Root.KeyPath -r
```

2. If you do not have a key file or the key file being used is corrupted, purchase and install it. For more details on the key file, purchasing and installing it, refer to the [Licensing](#) section.
3. You can view current license options on the **My Dr.Web** user webpage at



<https://support.drweb.com/get+cabinet+link/>.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *License is already expired*

Error code: x96

Internally used name: EC_EXPIRED_KEY

Description: The license has expired.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

1. Purchase a new license and install a received key file. For more details on how to purchase the license and install the key file, refer to the [Licensing](#) section.
2. You can view current license options on the **My Dr.Web** user webpage at <https://support.drweb.com/get+cabinet+link/>.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Network operation timed out*

Error code: x97

Internally used name: EC_NETWORK_TIMEOUT

Description: A network connection timed out (possibly, a remote host has stopped responding unexpectedly or the required connection has failed).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drwebctl log [command](#).

Troubleshooting

Check that the network is available and network settings are correct. If necessary, change the network settings and repeat the operation.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid checksum*

Error code: x98

Internally used name: EC_BAD_CHECKSUM

Description: The checksum of the downloaded file with updates is invalid.



To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).

Troubleshooting

Update virus databases again after some time: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid trial license*

Error code: x99

Internally used name: EC_BAD_TRIAL_KEY

Description: The demo key file is invalid (for example, it was received for another computer).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).

Troubleshooting

1. Request a new demo period for this computer or purchase a new license and install a received key file. For more details on how to purchase the license and install the key file, refer to the [Licensing](#) section.
2. You can view current license options on the **My Dr.Web** user webpage at <https://support.drweb.com/get+cabinet+link/>.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Blocked license key*

Error code: x100

Internally used name: EC_BLOCKED_LICENSE

Description: The current license is blocked (the terms of use of Dr.Web Industrial for Linux may be violated).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # `journalctl` command). You can also run the # `drweb-ctl log` [command](#).

Troubleshooting

1. Purchase a new license and install a received key file. For more details on how to purchase the license and install the key file, refer to the [Licensing](#) section.
2. You can view current license options on the **My Dr.Web** user webpage at <https://support.drweb.com/get+cabinet+link/>.



If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid license*

Error code: x101

Internally used name: EC_BAD_LICENSE

Description: The license is intended for another product or does not cover Dr.Web Industrial for Linux components.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

1. Purchase a new license and install a received key file. For more details on how to purchase the license and install the key file, refer to the [Licensing](#) section.
2. You can view current license options on the **My Dr.Web** user webpage at <https://support.drweb.com/get+cabinet+link/>.

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid configuration*

Error code: x102

Internally used name: EC_BAD_CONFIG

Description: A component of Dr.Web Industrial for Linux cannot operate because of invalid configuration settings.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log command`.

Troubleshooting

1. If you do not know the name of the component that causes the error, try to determine it by viewing the log file.
2. If the error is caused by the SpIDer Guard component, the mode that is selected for the component operation is probably not supported by your operating system. Check the selected component mode and change it, if necessary, by setting the *Auto* value (the *Mode* parameter in the [LinuxSpider] [section](#) of the [configuration file](#)).

- Use the command-line [management tool](#).

To set the value to *Auto*, run the [command](#):

```
# drwebctl cfset LinuxSpider.Mode Auto
```

To reset the parameter to its default value, run the command:

```
# drwebctl cfset LinuxSpider.Mode -r
```



Operation of SplDer Guard is guaranteed only if your OS is on the list of supported systems (see the [System Requirements and Compatibility](#) section).

3. If the error is caused by another component, reset its settings to defaults using any of the following methods:

- using the `drweb-ctl cfshow` and `drweb-ctl cfset` [commands](#);
- edit the [configuration file](#) manually (delete all parameters from the component section).

4. If the previous steps did not help, reset Dr.Web Industrial for Linux settings to defaults.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Invalid executable file*

Error code: x104

Internally used name: EC_BAD_EXECUTABLE

Description: Failed to start the component. The executable file is corrupted or the file path is invalid.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. If you do not know the name of the component that causes the error, try to determine it by viewing the log file.
2. Check the executable path to the component in the Dr.Web Industrial for Linux configuration file (the `ExePath` parameter in the component section) by running the [command](#) (replace `<component section>` with the name of the corresponding section of the [configuration file](#)):

```
$ drweb-ctl cfshow <component section>.ExePath
```

3. Reset the path to its default value by running the [command](#) (replace `<component section>` with the name of the corresponding section of the configuration file):

```
# drweb-ctl cfset <component section>.ExePath -r
```

4. If the previous steps did not help, reinstall the package of the corresponding component.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.



Error message: *Core engine is not available*

Error code: x105

Internally used name: EC_NO_CORE_ENGINE

Description: The file of Dr.Web Virus-Finding Engine is missing or unavailable.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the anti-virus engine file `drweb32.dll` and, if necessary, correct it (the `CoreEnginePath` parameter in the [Root] [section](#) of the [configuration file](#)).

- Use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Root.CoreEnginePath
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Root.CoreEnginePath <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Root.CoreEnginePath -r
```

2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

3. If the path is correct and the error persists after updating virus databases, reinstall the `drweb-bases` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *No virus databases*

Error code: x106

Internally used name: EC_NO_VIRUS_BASES

Description: Virus databases are missing.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the virus database directory. Change the path, if necessary (the `VirusBaseDir` parameter in the [Root] [section](#) of the [configuration file](#)). You can use the command-line [management tool](#).



To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Root.VirusBaseDir
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Root.VirusBaseDir <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Root.VirusBaseDir -r
```

2. Update virus databases: run the [command](#):

```
$ drweb-ctl update
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Process terminated by signal*

Error code: x107

Internally used name: EC_APP_TERMINATED

Description: A component has been shut down (possibly, owing to being idle or by a user request).

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. If the operation has not finished, repeat it. Otherwise, the shutdown is not an error.
2. If the component shuts down constantly, reset its settings to default using any of the following methods:
 - using the `drweb-ctl cfshow` and `drweb-ctl cfset` [commands](#);
 - edit the [configuration file](#) manually (delete all parameters from the component section).
3. If this did not help, reset Dr.Web Industrial for Linux settings to default.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save  
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Unexpected process termination*

Error code: x108

Internally used name: EC_APP_CRASHED



Description: A component has been shut down because of a failure.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log` [command](#).

Troubleshooting

1. Repeat the terminated operation.
2. If the component constantly shuts down abnormally, reset its settings to default using any of the following methods:

- using the `drwebctl cfshow` and `drwebctl cfset` [commands](#);
- edit the [configuration file](#) manually (delete all parameters from the component section).

3. If this did not help, reset Dr.Web Industrial for Linux settings to default.

To do this, clear the contents of the file `/etc/opt/drweb.com/drweb.ini` (it is recommended that you make a backup of the [configuration file](#)), for example, by running the commands:

```
# cp /etc/opt/drweb.com/drweb.ini /etc/opt/drweb.com/drweb.ini.save
# echo "" > /etc/opt/drweb.com/drweb.ini
```

After clearing the contents of the configuration file, restart the configuration daemon by running the command:

```
# service drweb-configd restart
```

4. If the error persists after resetting Dr.Web Industrial for Linux settings, reinstall the component package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Incompatible software detected*

Error code: x109

Internally used name: EC_INCOMPATIBLE

Description: One or several components of Dr.Web Industrial for Linux cannot operate properly. Their operation is impeded by software in your system.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drwebctl log` [command](#).

Troubleshooting

1. Disable or reconfigure the conflicting software such as to prevent any interference in the Dr.Web Industrial for Linux operation.

If the error persists, contact our [technical support](#) and provide the error code.



Error message: *MeshD is not available*

Error code: x114

Internally used name: EC_NO_MESH_D

Description: The Dr.Web MeshD component required for load balancing during file scanning is missing.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the `drweb-meshd` executable file. Change the path if necessary (the `ExePath` parameter in the [MeshD] [section](#) of the [configuration file](#)).

You can also use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow MeshD.ExePath
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset MeshD.ExePath <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset MeshD.ExePath -r
```

2. If the configuration does not contain Dr.Web MeshD settings or the error persists after entering the correct path, install or reinstall the `drweb-meshd` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *ScanEngine is not available*

Error code: x119

Internally used name: EC_NO_SCAN_ENGINE

Description: The Dr.Web Scanning Engine component required for threat detection is missing or has failed to start.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the `drweb-se` executable file. Change the path if necessary (the `ExePath` parameter in the [ScanEngine] [section](#) of the [configuration file](#)).

You can also use the command-line [management tool](#).



To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow ScanEngine.ExePath
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset ScanEngine.ExePath <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset ScanEngine.ExePath -r
```

2. If the error persists after entering the correct path:

- Run the [command](#):

```
$ drweb-ctl rawscan /
```

If the line "Error: No valid license provided" is output, a valid key file is missing. Register Dr.Web Industrial for Linux and receive a license. After receiving the license, check whether the [key file](#) is available and install it if necessary.

- If your operating system uses SELinux, configure the security policy for the drweb-se module (see the section [Configuring SELinux Security Policies](#)).

3. If the configuration does not contain Dr.Web Scanning Engine settings or the previous steps did not help, install or reinstall the drweb-se package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *FileCheck is not available*

Error code: x120

Internally used name: EC_NO_FILE_CHECK

Description: The Dr.Web File Checker component is missing or has failed to start.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the # journalctl command). You can also run the # drweb-ctl log [command](#).

Troubleshooting

1. Check the path to the drweb-filecheck executable file. Change the path if necessary (the ExePath parameter in the [FileCheck] [section](#) of the [configuration file](#)).

You can also use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow FileCheck.ExePath
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset FileCheck.ExePath <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset FileCheck.ExePath -r
```



2. If the error persists after entering the correct path:
 - If your operating system uses SELinux, configure the security policy for the `drweb-filecheck` module (see the section [Configuring SELinux Security Policies](#)).
3. If the configuration does not contain Dr.Web File Checker settings or the previous steps did not help, install or reinstall the `drweb-filecheck` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *ESAgent is not available*

Error code: x121

Internally used name: `EC_NO_ESAGENT`

Description: The Dr.Web ES Agent component required to connect to a centralized protection server is missing.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the `drweb-esagent` executable file. Change the path if necessary (the `ExePath` parameter in the [ESAgent] [section](#) of the [configuration file](#)).

You can also use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow ESAgent.ExePath
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset ESAgent.ExePath <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset ESAgent.ExePath -r
```

2. If the configuration does not contain Dr.Web ES Agent settings or the error persists after entering the correct path, install or reinstall the `drweb-esagent` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *NetCheck is not available*

Error code: x123

Internally used name: `EC_NO_NETCHECK`

Description: The Dr.Web Network Checker component required to scan files over the network is



missing.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

1. Check the path to the `drweb-netcheck` executable file. Change the path if necessary (the `ExePath` parameter in the [Netcheck] [section](#) of the [configuration file](#)).

You can also use the command-line [management tool](#).

To get the current parameter value, run the [command](#):

```
$ drweb-ctl cfshow Netcheck.ExePath
```

To set a new parameter value, run the [command](#):

```
# drweb-ctl cfset Netcheck.ExePath <new path>
```

To reset the parameter to its default value, run the command:

```
# drweb-ctl cfset Netcheck.ExePath -r
```

2. If the configuration does not contain Dr.Web Network Checker settings or the error persists after entering the correct path, install or reinstall the `drweb-netcheck` package.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#) and provide the error code.

Error message: *Unexpected error*

Error code: x125

Internally used name: `EC_UNEXPECTED_ERROR`

Description: An unexpected error has occurred in operation of one or several components.

To identify a possible cause and the circumstances of the error, refer to the Dr.Web Industrial for Linux log (by default, it can be viewed with the `# journalctl` command). You can also run the `# drweb-ctl log` [command](#).

Troubleshooting

Restart Dr.Web Industrial for Linux by running the command:

```
# service drweb-configd restart
```

If the error persists, contact our [technical support](#) and provide the error code.

Errors without a code

Symptoms: The main window of Dr.Web Industrial for Linux is disabled, the [status indicator](#) in the notification area of the taskbar displays a critical error mark, and the drop-down list contains only one disabled item—**Loading**.



Description: Dr.Web Industrial for Linux cannot start as the Dr.Web ConfigD configuration daemon is not available.

Troubleshooting

1. Run the command:

```
# service drweb-configd restart
```

to restart Dr.Web ConfigD and Dr.Web Industrial for Linux in general.

2. If this command returns an error or has no effect, install the `drweb-configd` package separately.



This also may mean that PAM authentication is not used in the system. If so, install and configure PAM since Dr.Web Industrial for Linux cannot operate correctly without it.

3. If the error persists, uninstall Dr.Web Industrial for Linux entirely and then reinstall it.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).

If the error persists, contact our [technical support](#).

Symptoms

1. The [status indicator](#) is not displayed in the notification area after the user has logged in.
2. Running the command to start the graphical interface:

```
$ drweb-gui
```

opens Dr.Web Industrial for Linux [main window](#).

Description: Possibly, this issue is caused by that the required additional library `libappindicator1` is not installed in your system.

Troubleshooting

1. Make sure that the `libappindicator1` package is installed in your system by running the command:

```
# dpkg -l | grep libappindicator1
```

2. If the command does not output any result to the screen, you should install the package using any available system package manager. After that, log out and then log in again.



This may also mean that PAM is not used in the system for user authentication. If so, install and configure it.

3. If the previous actions did not help, uninstall Dr.Web Industrial for Linux completely and then install it again.

For details on how to install and uninstall Dr.Web Industrial for Linux or its components, refer to sections [Installing Dr.Web Industrial for Linux](#) and [Uninstalling Dr.Web Industrial for Linux](#).



If the error persists, contact our [technical support](#).

Symptoms: Double-clicking an icon of a file or a directory in a graphical file manager starts the scanning in Dr.Web Industrial for Linux instead of opening this file or directory.

Description: The graphical shell has automatically associated files of a certain type and/or directories with the **Open With Dr.Web Industrial** action.

Troubleshooting

1. Cancel the association of files of this type with Dr.Web Industrial for Linux. The associations are registered in the `mimeapps.list` or `defaults.list` file. Files defining local settings changed in a user profile are stored in the `~/.local/share/applications/` or `~/.config/` directory (these directories usually have a “hidden” attribute).
2. Open the `mimeapps.list` or `defaults.list` file with any text editor.



To edit the system association file, superuser (usually the *root* user) privileges are required. If necessary, use the `su` or `sudo` command.

3. In the file, find the `[Default Applications]` section and association lines such as `<MIME-type>=drweb-gui.desktop`, for example:

```
[Default Applications]
inode/directory=drweb-gui.desktop
text/plain=drweb-gui.desktop;gedit.desktop
```

4. If the right part of the association line (after the equal sign) contains links to other applications besides `drweb-gui.desktop`, remove only the link to the `drweb-gui` application (`drweb-gui.desktop`). If the association contains a link only to the `drweb-gui` application, remove the whole association line.
5. Save the changed file.

Additional information

- To check the current associations, use the `xdg-mime`, `xdg-open` and `xdg-settings` utilities (included in the `xdg-utils` package).
- To read more about the `xdg` utilities, refer to the documentation shown with the `man` command: `xdg-mime(1)`, `xdg-open(1)` and `xdg-settings(1)`.

If the error persists, contact our [technical support](#).



10.7. Appendix G. List of Abbreviations

The following abbreviations were used in this manual without further interpretation:

Convention	Complete form
<i>AD</i>	Microsoft Active Directory
<i>FQDN</i>	Fully Qualified Domain Name
<i>GID</i>	Group ID (system user group identifier)
<i>GNU</i>	GNU project (GNU is Not Unix)
<i>HTML</i>	HyperText Markup Language
<i>HTTP</i>	HyperText Transfer Protocol
<i>HTTPS</i>	HyperText Transfer Protocol Secure (via SSL/TLS)
<i>ID</i>	Identifier
<i>IMA/EVM</i>	Integrity Measurement Architecture and Extended Verification Module
<i>IP</i>	Internet Protocol
<i>MBR</i>	Master Boot Record
<i>OS</i>	Operating System
<i>PID</i>	Process ID (system process identifier)
<i>PAM</i>	Pluggable Authentication Modules
<i>RPM</i>	Red Hat Package Manager
<i>SP</i>	Service Pack
<i>SSH</i>	Secure Shell
<i>SSL</i>	Secure Sockets Layer
<i>TCP</i>	Transmission Control Protocol
<i>TLS</i>	Transport Layer Security
<i>UID</i>	User ID (system user identifier)
<i>URI</i>	Uniform Resource Identifier
<i>URL</i>	Uniform Resource Locator



Convention	Complete form
<i>VBR</i>	Volume Boot Record

